

Multiply The Prices In This Book By 1.05 OR Call For Accurate Quote

■ = C&B distribution area




CUMMINGS & BRICKER

www.cummingsandbricker.com
support@cummingsandbricker.com

Effective: 01/01/2026

F.O.B. C&B



[Click here for ordering programs-Select Program #5 from Bookmarks](#)

HEADER TRAILERS - COMBINE HEADER TRAILERS

HEADER CARRIERS - TWO WHEEL STEER

Horst Header Wagon Features



Built on our revolutionary triple-axis base, our new universal pad provides you with flexible pad configurations. Making this single pad the only pad you'll ever need.

Note: Universal pads are standard on 4-wheel steer header wagons and are optional on 2-wheel steer models.



Tri-Axis Adjustability

- Up, Down
- Forward, Backward
- Left, Right



Ratchet Straps

These heavy duty ratchet straps are repositionable to match the best possible strapping location for your head.



New Improved Steering

Horst Header Wagons now feature an improved steering system that provides tighter steering when following the tow vehicle and prevents bent tongues.



Tapered Roller Bearings in Main Pivot Points

Roller bearings keep pivot points tight, ensuring no trailer sway and long-lasting use.

Adjustable Top Rail

Makes sure wagon fits most sizes and models of combine heads.

Quick Release Header Mount

Easily reposition the header mount by simply lowering the over-center locking handles.

Road Signal Light Kit (optional)

Make road travel safer by adding the road signal light kit which includes brake, turning and hazard lights.

100-120 LEHIGH AVE.
P.O. BOX 928
BATAVIA, NY 14021
PHONE: 800-252-1552 FAX: 888-852-7406

100 STOVER DRIVE
CARLISLE, PA 17015
PHONE: 800-222-8969
FAX: 717-249-9384



HEADER CARRIERS

TWO WHEEL STEER

FOR UP TO 25 FOOT COMBINE HEADS

Carriers will have an 18' Wheelbase and 26' Top Rail

ITEMNUMBER	DESCRIPTION	PRICE
CHC2520	20.5 x 8-10 Tires (F Range) - 7,200# Capacity	\$5,612.00
CHC2526	26 X 12 12 Ply Tires - 11,000# Capacity	\$6,116.00
CHC25225	225/75 X 15 (D Range) Highway Trailer Tires - 10,160# Capacity	\$5,992.00
CHC25235	235/85 R16 (F Range) Highway Trailer Tires On 16 x 8 x 6 Rims - 15,840# Capacity	\$6,368.00
CHC25HWY	11L X 15 (F Range) Highway Service Tires - 15,840# Capacity	\$6,868.00

FOR UP TO 30 FOOT COMBINE HEADS

Carriers will have an 18' Wheelbase and 31' Top Rail

ITEMNUMBER	DESCRIPTION	PRICE
CHC3020	20.5 X 8-10 (F Range) Tires - 7,200# Capacity	\$5,882.00
CHC3026	26 X 12 X 12 Ply - 11,000# Capacity	\$6,386.00
CHC30225	225/75 X 15 (D Range) Trailer Tires - 10,160# Capacity	\$5,992.00
CHC30235	235/85 X 16 (F Range) Trailer Tires - 15,840# Capacity	\$6,368.00
CHC30HWY	11L X 15 (F Range) Highway Service Tires - 15,840# Capacity	\$7,138.00

FOR UP TO 36 FOOT COMBINE HEADS

Carriers will have an 24' Wheelbase and 36' Top Rail

ITEMNUMBER	DESCRIPTION	PRICE
CHC3626	26 X 12 X 12 Ply - 11,000# Capacity	\$7,806.00
CHC36225	225/75 X 15 (D Range) Highway Trailer Tires - 10,160# Capacity	\$7,682.00
CHC36235	235/85 X 16 (F Range) Highway Trailer Tires - 15,840# Capacity	\$8,058.00
CHC36HWY	11L X 15 12 (F Range) Highway Service Tires - 15,840# Capacity	\$8,558.00

Setup for Two Wheel Steer: \$250

2 WHEEL STEER HEADER WAGONS



Two Wheel Steer Header Wagons

Model	CHC25	CHC30	CHC36
Rated Capacity	Varies by tire selection. 7,200 - 15,840 lbs.		
Tracking Width (Center of Tires)	79"		
Wheelbase	18'		24'
Tires Choices	20.5x8-10 12ply, 26x12 12ply, 225/75x15 8ply, or 11Lx15 12ply Highway Service		
Tongue Length	ADJ. 11' to 13'		
Top Rail Length	26'	31'	36'
Bridged Top & Bottom Rail	24' Bottom Rail		
Maximum Head Size	25'	30'	36'
Safety Chain	Standard		
Road Signal Light Kit	Optional		
Shipping Weight	1525 lbs.	1575 lbs.	1640 lbs.

NO-SWAY DESIGN: provides a smooth trailing wagon that eliminates the zig-zag action through tapered roller bearings on all the main pivot points. Includes the king-pins and steering pivot joint. The predictable trailing movement is especially important for combine operators who don't have a clear rear-view and need to rely on a steady trailing wagon.

TIRES: made with double tube construction designed to handle uneven ground reliably. Heavy-grade tires with low wearing tread is.

FEATURES:

- Includes 2, tool free configurable standard pads
- 2 Ratchet straps to secure load
- Bridged bottom rail on CHC36
- Safety chain
- Length adjustable hitch w/ auto lock or simple hook up

OPTIONS:

- Light kit
- Universal pads
- Heavy duty bottom rail
- Honey Bee Air FLEX pad adapter
- Single spring balancer
- Double spring balancer



HEADER CARRIERS

FOUR WHEEL STEER

FOR UP TO 30 FOOT COMBINE HEADS

Carriers will have an 18' Wheelbase and 31' Top Rail

ITEMNUMBER	DESCRIPTION	PRICE
CHCF3020	20.5 X 8-10 (F Range) Tires - 7,200# Capacity *CHCHDBR18 Upgrade Is Recommended For Heads Over 10,000#	\$8,077.00
CHCF3026	26 X 12 12 Ply Tires - 11,000# Capacity *CHCHDBR18 Upgrade Is Recommended For Heads Over 10,000#	\$8,581.00
CHCF30235	235/85R16 (F Range) Highway Trailer Tires - *CHCHDBR18 Upgrade Is Recommended For Heads Over 10,000#	\$8,833.00
CHCF30HWY	11L X 15 (F Range) Highway Service Tires - *CHCHDBR18 Upgrade Is Recommended For Heads Over 10,000#	\$9,333.00

FOR UP TO 36 FOOT COMBINE HEADS

Carriers will have an 30' Wheelbase and 36' Top Rail

ITEMNUMBER	DESCRIPTION	PRICE
CHCF3626HD	26 X 12 12 Ply Tires - *Now Standard With Heavy Duty Bottom Rail	\$11,929.00
CHCF36235HD	235/85R16 (F Range) Highway Trailer Tires - 15,840# Capacity *Now Standard With Heavy Duty Bottom Rail	\$12,181.00
CHCF36HWYHD	11L X 15 (F Range) Highway Service Tires - 15,840# Capacity *Now Standard With Heavy Duty Bottom Rail	\$12,681.00

FOR UP TO 45 FOOT COMBINE HEADS

Carriers will have an 30' Wheelbase and 45' Top Rail

ITEMNUMBER	DESCRIPTION	PRICE
CHCF4526HD	26 X 12 12 Ply Tires - 11,000# Capacity *Now Standard With Heavy Duty Bottom Rail	\$12,849.00
CHCF45235HD	235/85R16 (F Range) Highway Trailer Tires - 15,840# Capacity *Now Standard With Heavy Duty Bottom Rail	\$13,101.00
CHCF45HWYHD	11L X 15 (F Range) Highway Service Tires - 15,840# Capacity *Now Standard With Heavy Duty Bottom Rail	\$13,601.00

Setup for Four Wheel Steer: \$550

Model	CHCF30	CHCF36	CHCF45
Rated Capacity	Varies by tire size. From 7,200 – 15,840 lbs.		
Tracking Width (Center of Tires)	76"	79"	79"
Wheelbase	18'	30'	30'
Tires	26x12 12ply, 235/85R16 12 ply, or 11Lx15 12ply Highway Service		
Tongue Length	ADJ. 11' to 15'		
Top Rail Length	31'	36'	45'
Bridged Top & Bottom Rail	Standard		
Maximum Head Size	30'	36'	45'
Safety Chain	Standard		
Road Signal Light Kit	Optional		
Shipping Weight	2170#	2240#	2620#

CONTOUR 4 WHEEL STEER HEADER WAGONS



Take the hassle out of transporting wide heads from field to field with the 4-wheel steer *Contour* header wagon. The *Contour* adds greater maneuverability with 4-wheel steering which is ideal for combine heads 30 feet and longer. The *Contour* follows the same tire tracks of the towing vehicle or combine when cornering. If your combine can make the turn, so will the Horst *Contour* Header Wagon. Take advantage of a better built header wagon and have the reassurance your combine head is traveling safely and smoothly.



HEADER CARRIERS

FOUR WHEEL STEER REAR ELECTRIC BRAKES

ITEMNUMBER	DESCRIPTION	PRICE
CHCFE3023	Four Wheel Steer Header Carrier With **Electric Brakes** - Up to 30' Heads - 235/85X16 Tires *CHCHDBR18 Upgrade is Recommended For Heads Over 10,000#	\$12,790.00
CHCFE36235	Four Wheel Steer Header Carrier With **Electric Brakes** - Up To 36' Heads - 235/85X16 Tires *Now Standard With Heavy Duty Bottom Rail	\$14,418.00
CHCFE45235	Four Wheel Steer Header Carrier With **Electric Brakes** - Up to 45' Heads - 235/85X16 Tires *Now Standard With Heavy Duty Bottom Rail	\$15,338.00

Setup for Four Wheel Steer Rear Electric Brakes: \$1,000

4 Wheel Steer Rear Electric Brakes CHCFE 30'-45' Heads

The contour 4-wheel steer farm header wagon with the addition of standard electric rear wheel brakes and a light/road signal kit. This new hybrid model gets you going and stopping all while reducing the stress on your tow vehicle.



STANDARD FEATURES:

- Bearings On King Pins For Absolute No Sway Trailing
- Includes 2 Shoes And 2 Universal Pads
- 2-5/16 Ball Hitch & Safety Chain
- 2 Ratchet Straps To Secure Load 4 Wheel Steering
- 2 Wheel Electric Brakes (On Rear Axle)
- Light Kit (Red Lenses)

4 WHEEL STEER HIGH CAPACITY X SERIES HEADER CARRIER

X Series Header Carriers Have A 24,000 lb GVWR With 4 Wheel Electric Brakes

X SERIES HEADER CARRIERS

ITEMNUMBER	DESCRIPTION	PRICE
CHCFX35	30' Header Carrier - 4 Wheel Steer, 24K GVWR / Highway Model	\$20,576.00
CHCFX40	40' Header Carrier - 4 Wheel Steer, 24K GVWR / Highway Model	\$21,163.00
CHCFX45	45' Header Carrier - 4 Wheel Steer, 24K GVWR / Highway Model	\$24,343.00
CHCFX50	50' Header Carrier - 4 Wheel Steer, 24K GVWR / Highway Model	\$27,338.00

JOHN DEERE COMPATIBLE X SERIES HEADER CARRIERS

Specifically Designed From John Deere Specifications For Hinged Draper Heads

ITEMNUMBER	DESCRIPTION	PRICE
CHCFX35JDHD	35' Header Carrier - 4 Wheel Steer, 24K GVWR / JD HD35R/HD35F Compatible	\$22,307.00
CHCFX40JDHD	40' Header Carrier - 4 Wheel Steer, 24K GVWR / JD HD40R/HD40F/HD40X Compatible	\$25,534.00
CHCFX45JDHD	45' Header Carrier - 4 Wheel Steer, 24K GVWR / JD HD 45 F/R/X Compatible	\$28,673.00
CHCFX50JDHD	50' Header Carrier - 4 Wheel Steer, 24K GVWR / JD HD 50 F/R Compatible	\$31,818.00

Setup for X Header Carriers: \$1,200

X SERIES HEADER CARRIERS

Designed for detailed no sway road travel. 4 wheel steering and braking allows the operator to feel in total control, while the carrier cradles the header for a made-to-spec fit, and reliable protection.

40' wheel base allows the gauge wheels extra room between the axles, and eliminates the big tail swing.

FEATURES:

- 4 Wheel Electric Brakes
- 24,000 Gross Vehicle Weight Rating w/8 Bolt High Speed Automotive Hubs
- 6 Ratchet Straps To Secure Load (4 on 35' units)
- Double Spring Balancer
- Safety Chain
- 7 Pin RV / Brake Light Plug
- Rear Lights With Brake And Turn Signals
- 235/75 R17.5 (16 ply) Tires
- 2 5/16" Ball Hitch



John Deere X Series Headers

Specifically designed from John Deere specs. for hinged draper heads.

- Fits up to 50' heads
- 4 Ratchet straps to secure load
- Meets all requirements from JD

Multiply The Prices In This Book By 1.05 OR Call For Accurate Quote



CUMMINGS & BRICKER

www.cummingsandbricker.com
support@cummingsandbricker.com

Effective: 01/01/2026

F.O.B. C&B



HEADER CARRIERS

FOUR WHEEL STEER WITH SUSPENSION AND BRAKES

NOT DESIGNED TO FIT JD HINGED DRAPER HEADS

ITEMNUMBER	DESCRIPTION	PRICE
CHCFRF30	4 Wheel Steer- W/Suspension-Up To 30' Heads (18' Wheelbase and 31' Top Rail) - 15,840# Capacity *CHCHDBR18 Upgrade Is Recommended For Heads Over 10,000#	\$17,742.00
CHCFRF36	4 Wheel Steer- W/Suspension-Up To 36' Heads (30' Wheelbase and 36' Top Rail) - 15,840# Capacity *Now Standard With Heavy Duty Bottom Rail	\$19,361.00
CHCFRF45	4 Wheel Steer- W/Suspension-Up To 45' Heads (30' Wheelbase and 45' Top Rail) - 15,840# Capacity *Now Standard With Heavy Duty Bottom Rail	\$20,290.00

Setup for Four Wheel Steer With Suspension & Brakes: \$1,000

Contour Cross Country with Independent Suspension and Brakes			
Model	CHCFSP30	CHCFSP36	CHCFSP45
Rated Capacity	15,840 lbs.		
Tracking Width (Center of Tires)	81"	81"	81"
Wheelbase	18'	30'	30'
Tires	235/85R16 12 ply Highway Trailer		
Tongue Length	Adjustable 11'-15'		
Top Rail Length	31'	36'	45'
Bridged Top & Bottom Rail	Standard		
Maximum Head Size	30'	36'	45'
Safety Chain	Standard		
Road Signal Light Kit	Standard		
Shipping Weight	2405#	2675#	2855#

Standard Features:

- Bearings on king pins for absolute no sway trailing
- Ratchet straps to secure load
- 4 wheel independent suspension
- 4 wheel electric brakes
- 4 wheel steer
- 235/85 R16 (F Range) Highway trailer tire on 16x8x6 wheel
- 30 ft wheelbase with reinforced bottom rail
- Extra long tongue with safety chain
- 2 5/16" ball hitch
- Light kit (red lenses)



100 LEHIGH AVE.

BATAVIA, NY 14020
PHONE: 800-252-1552 FAX: 888-852-7406

90 STOVER DRIVE
CARLISLE, PA 17015
PHONE: 800-222-8969
FAX: 717-249-9384

Multiply The Prices In This Book By 1.05 OR Call For Accurate Quote



CUMMINGS & BRICKER

www.cummingsandbricker.com
support@cummingsandbricker.com

Effective: 01/01/2026

F.O.B. C&B




HEADER CARRIERS

HEADER CARRIER OPTIONS

ITEMNUMBER	DESCRIPTION	PRICE
LK18	Road Signal Light Kit 18' Wheelbase Models	\$771.00
LK24	Road Signal Light Kit 24' Wheelbase Models	\$771.00
LK30	Road Light Signal Kit 30' Wheelbase Models	\$771.00
CHCLPO	Upgrade option to Universal Large Header Pads (Two Wheel Steer Models) Includes Both Pads	\$469.00
HBAFK	Honey Bee AirFlex Pad Kit For CHCF-CHCFE-CHCFSP	\$305.00
CHCFK	Fender Kit CHC Two Wheel Steer and CHCF 4 Wheel Steer Models	\$1,081.00
WAS3	Setup Charge 2 Wheel Steer Models- Net	\$300.00
WAS4	Setup Charge CHCF 4 Wheel Steer Models And SHCF Swather Head Carriers- Net	\$650.00
WAS5	Setup Charge CHCF Models W/Suspension And/Or Brakes	\$1,000.00
WAS8	Setup Charge For CHCFX models	\$1,200.00
CHCHDBR18	Heavy Duty Bottom Rail-For heads over 10,000 lbs. - 18' wheelbase	\$2,387.00
CHCTRMX2	Top Rail Extension Up To 10" - CHC25 30 36/CHCF30/CHCFE30/CHCFRF30	\$397.00
CHCTRMX3	Top Rail Extension Up To 10" - CHCF/CHCFE/CHCFRF/CHCFX 36' & 45 Models	\$564.00



CHC Two Wheel Steer

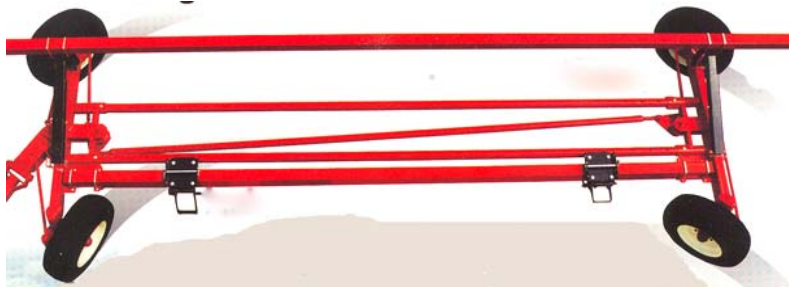

CHCF Four Wheel Steer



CHCSP Cross Country with suspension and brakes

100 LEHIGH AVE.

BATAVIA, NY 14020
PHONE: 800-252-1552 FAX: 888-852-7406

90 STOVER DRIVE
CARLISLE, PA 17015
PHONE: 800-222-8969
FAX: 717-249-9384



WAGON GEARS - HORST

WAGON GEARS - FOUR WHEEL MODELS

How to order:

1. Select a Wagon with adequate capacity for the intended load
2. Select Reach Poles that will provide adequate wheelbase length. The Model 145 requires One (1) Reach Pole. All other models require Two (2) Reach Poles. (See guideline for proper reach lengths)

* Models 285/365/485/505/605/608 require Square Reach Poles, all others require Round Reach Poles.

3. Select the size and number of wheels required for the tires intended to be used. Wheels are priced "per each" **NOTE: Go to www.horstwelding.com for specific track widths and max wheel and tire limitations**
4. Select tires if required. Tires are priced "per each"

Models available from 8 ton to 40 ton capacity



ITEMNUMBER	DESCRIPTION	PRICE
WA145	Model 145 (74" Tread Width) Eight Ton Wagon Gear w/quick hitch tongue. Add(1) WARR67 Reach for adjustable wheelbase 7'-11'and (4) 6 bolt wheels if required.	\$1,939.00
WA185	Model 185 Ten Ton Wagon Gear w/quick hitch tongue. Add (2) WARR11 Reaches for adjustable wheelbase 8'8"-11'2" and (4) 6 bolt wheels if required.	\$2,505.00
WA185F	Model 185F 6 Ton Wagon Gear, Four Wheel Steer - No Rims/Reaches, 6 Bolt	\$3,827.00
WA205	Model 205 Twelve Ton Wagon Gear w/quick hitch tongue. Add (2) WARR11 Reaches for adjustable wheelbase 8'8"-11'2" and (4) Eight Bolt Wheels if required.	\$3,010.00
WA275	Model 275 14 Ton Wagon Gear w/quick hitch tongue. Add (2) WARR11 Reaches for adjustable wheelbase 8'8"-11'2" and (4) Eight Bolt Wheels if required.	\$3,827.00
WA285	Model 285 Fifteen Ton Heavy Duty Wagon Gear w/quick hitch tongue. Add (2) WARS10 Reaches for adjustable wheelbase 10'7"-12'1" and (4) Eight Bolt Wheels if required.	\$4,706.00
WA365	Model 365 Twenty Ton Heavy Duty Wagon Gear w/quick hitch tongue. Add (2) WARS10 Reaches for adjustable wheelbase 10'7"-12'1" and (4) Eight Bolt wheels if required.	\$5,655.00
WA365E	Model 365E Twenty Ton Economy Heavy Duty Wagon Gear with quick hitch tongue. LESS ROCKING BOLSTER, Add (2) WARS10 Reaches for adjustable wheel base 10'7" - 12'1" and (4) Eight Bolt wheels if required.	\$5,143.00
WA485	Model 485 Twenty Four Ton Heavy Duty Wagon Gear w/quick hitch tongue. Add (2) WARS10 Reaches for adjustable wheelbase 10'7"-12'1" and (4) WH2251310 Ten Bolt wheels if required.	\$8,185.00

Multiply The Prices In This Book By 1.05 OR Call For Accurate Quote



CUMMINGS & BRICKER

www.cummingsandbricker.com
support@cummingsandbricker.com

Effective: 01/01/2026

F.O.B. C&B



WAGON GEARS - HORST

WAGON GEARS - FOUR WHEEL MODELS

Four Wheel Model Specifications							
Model	145/145-90	185	205	275	285	365	485
Capacity	16,000 lb (8Ton)	20,000 lb (10Ton)	24,000 lb (12Ton)	28,000 lb (14Ton)	30000 lb (15Ton)	40000 lb (20 ton)	48000 lb (24 Ton)
Track Width (Varies with wheel size. See Horst website for specifics)	74"/90"	76"	82"	89"	86" – 97" Depending on Tires and Wheels Used	86" – 97" Depending on Tires and Wheels Used	86" – 97" Depending on Tires and Wheels Used
Spindles	1 3/4" Diameter C1045 Hot Rolled	2" Diameter C1045 Hot Rolled	2 1/4" Diameter C1045 Cold Rolled	2 3/4" Diameter C1045 Cold Rolled	2 3/4" Diameter C1045 Cold Rolled	3" Diameter 1144 Stress Proof	4" Diameter C1045 Cold Rolled
Hubs	6 Bolt 4,000 lb	6 Bolt 6,000 lb	8 Bolt 6,500 lb	8 Bolt 8,000 lb	8 Bolt 8,000 lb	8 Bolt 10,000 lb	10 Bolt 16,000 lb
Rocking Bolster	Optional				Flexible Front		
Front Axle	5 1/2 x 3 x .188 Wall	6 x 3 x .210 Wall	7 x 3 x .250 Wall	8 x 3 1/2 x .250 Wall	8 x 4 x .250 Wall	10 x 4 x .250 Wall	10 x 4 x .500 Wall
Rear Axle	5 1/2 x 3 x .188 Wall	6 x 3 x .210 Wall	7 x 3 x .250 Wall	8 x 3 1/2 x .250 Wall	8 x 4 x .188 Wall	10 x 4 x .188 Wall	10 x 4 x .375 Wall
Tongue Bracket Mounting	1 1/2" Bolt Bearing Mtd.						
Tongue Bolt	7/8" Diameter	1 1/8" Diameter					1 1/2"
Tongue Latch	Retractable Automatic Relock						
Reach Poles	3" O.D. x .188 Wall - Round Tube				6 x 4 x .188 - Square Tubes		
Bolster Stakes	Adjustable 38" - 40" - 42"				42 1/2" Fixed		
Steering	Automotive Type						
Tie Rod Ends	Greaseable Automotive Style Ball Joints						
Wheel Base	Adjustable						
Height From Ground To Top of Bunk	23" (on 9.5 x 15 Tires)	24" (on 11L x 15 Tires)	26" (12.5 x 16 Tires) 30" (11 x 22.5 Tires)	30" (11 x 22.5 Tires)	32" (18 x 22.5 Tires)	34" (18 x 22.5 Tires)	34" (18 x 22.5 Tires)
Approx. Weight	610 lb	750 lb	1010 lb	1120 lb	1,650 lb	1850 lb	2450 lb
OPTIONS							
2 Wheel Hydraulic Surge Brakes	Not Available		Optional		Not Available		
2 Wheel Hydraulic Disc Brakes (Remote)	Not Available			Optional (factory installed)			
4 Wheel Hydraulic Disc Brakes (Remote)	Not Available						
Safety Chain	3/8"				1/2"		
Spring Balancer Kit	Optional (Single or Double Spring)						

100 LEHIGH AVE.

BATAVIA, NY 14020
PHONE: 800-252-1552 FAX: 888-852-7406

90 STOVER DRIVE
CARLISLE, PA 17015
PHONE: 800-222-8969
FAX: 717-249-9384



WAGON GEARS - HORST

WAGON GEARS - ROAD FLEX SUSPENSION MODELS

ITEMNUMBER	DESCRIPTION	PRICE
WA185RF	Model 185RF - 4 Wheel, Heavy Duty Road Flex Suspension - 10 Ton Wagon Gear w/Quick Hitch Tongue - Add 6 Bolt Wheels And Reach	\$5,523.00
WA205RF	Model 205RF - 4 Wheel, Heavy Duty Road Flex Suspension - 12 Ton Wagon Gear w/Quick Hitch Tongue - Add (4) Bolt Wheels and Reach	\$6,340.00
WA285RF	Model 285RF - 4 Wheel, Heavy Duty Road Flex Suspension - 15 Ton Wagon Gear w/Quick Hitch Tongue - Add Reach and (4) 8 Bolt Wheels	\$8,754.00
WA365RF	Model 365RF - 4 Wheel, Heavy Duty Road Flex Suspension - 20 Ton Wagon Gear with Quick Hitch Tongue - Add Reach and (4) 8 Bolt Wheels	\$10,714.00
WA485RF	Model 485RF - 4 Wheel, Heavy Duty Road Flex Suspension - 24 Ton Wagon Gear w/Quick Hitch Tongue - Add Reach and (4) 10 Bolt Wheels	\$13,319.00
WA325RF	Model 325RF - 6 Wheel, Heavy Duty Road Flex Suspension - 18 Ton Wagon Gear w/Quick Hitch Tongue - Add 8 Bolt Wheels And Reach	\$9,312.00
WA505RF	Model 505RF - 6 Wheel, Heavy Duty Road Flex Suspension - 22 Ton Wagon Gear w/Quick Hitch Tongue - Add 8 Bolt Wheels And Reach	\$13,165.00
WA308RF	Model 308RF - 8 Wheel, Heavy Duty Road Flex Suspension - 20 Ton Wagon Gear w/Quick Hitch Tongue - Add 8 Bolt Wheels And Reach	\$14,953.00

Road Flex Suspension

Ideal for high speed tractors the Road Flex running gear uses suspension blocks to help eliminate bumps and vibrations when traveling down the road or field. Not only does Road Flex reduce stress from towing heavy loads it also provides increased stability to Horst wagons. In addition Road Flex provides independent suspension which eliminates the need for rocking bolsters.

NOTE: The rated capacities provided are for the chassis only and rims and tires should be matched accordingly when ordered.



STANDARD FEATURES

RETRACTABLE AUTOMATIC RELOCK TONGUE LATCH

(with standard variable adjustment)
Take the precision work out of hooking up by freely moving the tongue into place and watch it lock into place as soon as it's in motion.



TAPERED ROLLER BEARINGS IN MAIN PIVOT POINTS Roller bearings keep pivot points tight, ensuring no trailer sway and long-lasting use.



AUTOMOTIVE BALL JOINTS

Automotive style ball joints not only keep wagons behind you they also provide years of hard working service.



ROAD FLEX Road Flex suspension uses shock absorbing blocks to reduce the amount of bounce the wagon encounters as it's pulled down the road or across the field.





WAGON GEARS - HORST

TRAILER STYLE RUNNING GEAR

ITEMNUMBER	DESCRIPTION	PRICE
TR505	Trailer Chassis 20 Ton Tandem For 20'-26' Box - Add Tires And 16.1xW14Cx8 or 22.5x13x8 Wheels	\$8,014.00
TR505RF	Trailer Chassis 20 Ton Tandem For 20'-26' Box - W/Road Flex, Add 8 Bolt Wheels	\$22,408.00
TR605	Trailer Chassis 24 Ton Tandem For 20'-24' Box - Add Tires And 22.5x13x10 Or 22.5x16x10 Wheels	\$9,029.00
TR605RF	Trailer Chassis 24 Ton Tandem for 20' - 24' Box - W/ Road Flex, Add (4) 10 Bolt Wheels	\$25,082.00

2PH TRAILER DOLLY

ITEMNUMBER	DESCRIPTION	PRICE
2PHDOLLY	Dolly 2PH - Electric Brakes - 2-5/16" Ball - 235/85R16 Tires	\$4,601.00

TRAILER CHASSIS




Three pairs of fixed bolsters provide the flexibility you need to mount a variety of forage boxes, gravity boxes, or racks

TR505

20 ton (40,000 lbs.)
8 Stud 12,000 lbs.
Fixed bolsters 11'2"
Heavy Duty Jack
Safety Chain (1/2" GR. 70)

TR605

24 ton (48,000 lbs.)
10 Stud 16,000 lbs.
Fixed bolsters 11'2"
Heavy Duty Jack
Safety Chain (1/2" GR. 70)

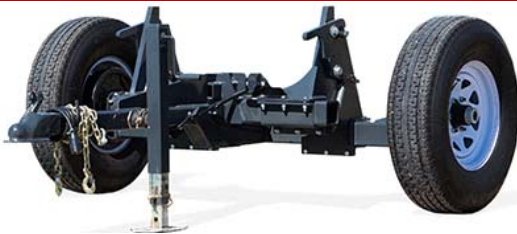

2PH



2PH Dolly shown in tow with the Tubeline Bale-Liner

FEATURES

- Compatible with Category 2, 3N, and 3 point hitches
- Safety lock securely holds pins
- 2" Receiver
- 7 pin ag receptacle for implement electrics

SPECIFICATIONS

- Ball Hitch (2-5/16)
- 7 pin RV style connector
- Electric Brakes
- 235/85 R16 highway trailer tires
- 16x8x6 Rim

The trailer Dolly from Horst provides a safe economical platform for transporting 2PH implements.



WAGON GEARS - HORST

WAGON GEARS - SIX WHEEL TANDEM MODELS

ITEMNUMBER	DESCRIPTION	PRICE
WA245	Model 245 Twelve Ton Wagon Gear w/quick hitch tongue. Add (2) WARR11 Reaches for adjustable wheelbase 8'8"-11'2" and (6) Six Bolt wheels if required.(Max. Wheel Dia.16")	\$3,512.00
WA265	Model 265 14 Ton Wagon Gear w/quick hitch tongue. Add (2) WARR11 Reaches for adjustable wheelbase 8'8"-11'2" and (6) Eight Bolt wheels if required.(Max.Wheel Dia.16")	\$4,035.00
WA325	Model 325 Eighteen ton Wagon Gear w/quick hitch tongue. Add (2) WARR11 Reaches for adjustable wheelbase 8'8"-11'2" and (6) Eight Bolt wheels if required.(Max Wheel Dia. 22.5")	\$6,553.00
WA505	Model 505 Twenty Two Ton Heavy Duty Wagon Gear w/quick hitch tongue. Add (2) WARS10 Reaches for adjustable wheelbase 10'7"-12'1" and (6) Eight Bolt wheels if required.(Max Wheel Dia. 22.5")	\$9,059.00
WA605	Model 605 Thirty Ton Heavy Duty Wagon Gear w/quick hitch tongue, Rocking Bolster. Add (2) WARS10 Reaches for adjustable wheelbase 10'7"-12'1" and (6) WH2251310 Ten Bolt wheels if required.(Max Wheel Dia. 22.5")	\$11,383.00

Six Wheel Model Specifications					
Model	245	265	325	505	605
Capacity	24,000 lb (12 Ton)	28,000 lb (14 Ton)	32,000 lb (18 Ton)	44,000 lb (22 Ton)	60,000 lb (30 Ton)
Track Width (Varies with wheel size. See Horst website for specific track widths)	76" - 77"	82" - 88"	86" - 89"	86" - 97"	
Spindles	Front: 2" Diameter Rear: 2 ¼" Diameter	2 ¼" Diameter C1045 Cold Rolled	3" Diameter C1045 Cold Rolled	Front: 3" Diameter Rear: 3 ½" Diameter 1144 Stress Proof	4" Diameter C1045 Cold Rolled
Hubs	6 Bolt 6,000 lb	8 Bolt 6,500 lb	8 Bolt 12,000 lb	8 Bolt 10,000 lb	10 Stud 16,000 lb
Front Axle	6 x 3 x .210 Wall	7 x 3 x .250 Wall	8 x 3 x .250 Wall	10 x 4 x .250 Wall	10 x 4 x .500 Wall
Rear Axle	6 x 3 x .250 Wall	7 x 3 x .313 Wall	8 x 3 x .250 Wall	10 x 4 x .375 Wall	10 x 4 x .500 Wall
Tongue Bracket Mounting	1 1/2 " Bolt Bearing Mtd				
Tongue Bolt	1 1/8 " Diameter				1 ½" Diameter
Tongue Latch	Retractable Automatic Relock				
Reach Poles	3" OD x .188 Wall Round Tube			6 x 4 x .188 Square Tubes	
Bolster Stakes	Adjustable 30" - 40" - 42"			42 ½" Fixed	
Steering	Automotive Type				
Tie Rod Ends	Greaseable Automotive Style Ball Joints				
Wheel Base	Adjustable				
Height from Ground to Top of Bunk	24" (11x15 Tires)	26" (12.5x16 Tires) 30" (11x22.5 Tires)	30" (11x22.5 Tires)	34" (18x22.5 Tires)	
Approx. Weight	1050 lb	1290 lb	1450 lb	2850 lb	3450 lb
OPTIONS					
2 Wheel Hydraulic Surge Brakes	Not Available	Optional		Not Available	
2 Wheel Hydraulic Disc Brakes (Remote)	Not Available		Optional		
4 Wheel Hydraulic Disc Brakes (Remote)	Not Available		Optional		
Safety Chain	3/8 "			1/2 "	
Spring Balancer Kit	Optional (Single or Double Spring)				



WAGON GEARS - HORST

WAGON GEARS - EIGHT WHEEL DOUBLE TANDEM MODELS

ITEMNUMBER	DESCRIPTION	PRICE
WA308	Model 308 Twenty Ton Double Tandem Wagon Gear w/quick hitch tongue. Add (2) WARR11 Reaches for adjustable wheelbase 8'8"-11'2" and (8) Eight Bolt wheels if required.	\$9,008.00
WA608	Model 608 Forty Ton Double Tandem Wagon Gear w/quick hitch tongue, and Rocking Bolster. Add (2) WARS10 Reaches for adjustable wheelbase 10'7"-12'1" and (8) Ten bolt wheels if required.	\$18,788.00

Eight Wheel Model Specifications

Model	208	308	608
Capacity	32,000 lb.	40,000 lb.	80,000 lb.
Spindle	2 1/4" dia.	3" dia.	4" dia.
Hubs	8 Bolt 6,500 lb.	8 Stud 12,000 lb.	10 Stud 16,500 lb.
Bearings	Taper Roller 1.80/1.38	Taper Roller 2.165/1.625	Taper Roller 2.165/1.625
Front Axle	7 x 3 x .250 Wall	8 x 3 x .250Wall	10 x 4 x .500 Wall
Rear Axle	7 x 3 x .313 Wall	8 x 3 x .250 Wall	10 x 4 x .500 Wall
Tongue Bracket Mounting	1 1/2" Bolt Bearing Mounted		
Tongue Bolt	1 1/8" dia.	1 1/8" dia.	1 1/2" dia.
Tongue Latch	Retractable Automatic Relock		
Reach Poles	3" O.D. x .188 Wall Round Tube		6"x4" x.188 Square Tubes
Bolster Stakes	Adjustable 30"-40"-42"	Adjustable 30"-40"-42"	42.5 fixed
Steering	Automotive Type		
Tie Rod Ends	Greasable Automotive Style Ball Joints		
Wheel Base	Adjustable		
Height from ground to top of bunk	26" on 12.5 x 16 Tires 30" on 11 x 22.5 Tires	30" on 11x22.5 Tires	24" on 18 x22.5 Tires
Approx. Weight	1,720 lbs.	1,850 lbs.	3,450 lbs
OPTIONS			
Hydraulic Surge Brakes	2 Wheel	N/A	N/A
2 or 4 Wheel Hydraulic Disc Brakes	N/A	Optional	Optional
Safety Chain	3/8" GR70	1/2" GR70	1/2" GR70
Spring Balancer Kit	Single or Double Spring		
Rocking Bolster	N/A	N/A	Standard

The true power of 4 x 4 Horst Wagons welcomes you to a new generation of running gear. Designed for smoother travel and minimal soil compaction, QuadSteer models are changing the way you move from the field to the farm. With the addition of a dual front axle set, QuadSteer models combine two advantages into one: improved floatation and easier steering. Unlike any other running gear, QuadSteer with the second steering axle provides better weight distribution at the front of the wagon - especially while turning, when soil compaction happens most.





WAGON GEARS - HORST

WAGON GEAR REACH POLES

WAGON GEAR REACH POLES - ROUND

ITEMNUMBER	DESCRIPTION	PRICE
WARR67	Reach 6 '7" Long - Round	\$129.00
WARR9	Reach 9' Long - Round	\$150.00
WARR10	Reach 10' Long - Round	\$196.00
WARR11	Reach 11' Long - Round	\$188.00
WARR12	Reach 12' Long - Round	\$207.00
WARR14	Reach 14' Long - Round	\$245.00
WARR16	Reach 16' Long - Round	\$283.00
WARR18	Reach 18' Long - Round	\$321.00
WARR20	Reach 20' Long - Round	\$359.00
WARR22	Reach 22' Long - Round	\$397.00
WARR24	Reach 24' Long - Round	\$435.00
WARR26	Reach 26' Long - Round	\$473.00

WAGON GEAR REACH POLES - SQUARE

ITEMNUMBER	DESCRIPTION	PRICE
WARS8	Reach 8' Long - Square	\$273.00
WARS10	Reach 10' Long - Square	\$342.00
WARS12	Reach 12' Long - Square	\$411.00
WARS14	Reach 14' Long - Square	\$480.00
WARS16	Reach 16' Long - Square	\$549.00
WARS18	Reach 18' Long - Square	\$618.00
WARS20	Reach 20' Long - Square	\$687.00
WARS22	Reach 22' Long - Square	\$756.00
WARS24	Reach 24' Long - Square	\$825.00

Guidelines for Reach Pole Length Requirements

Forage Box Length	4 Wheel Std Wagon	6 Wheel Std Wagon	4 Wheel HD Wagon	6 Wheel HD Wagon
16' *(Axle Setting of 10'8")	11' Round	11' Round	10' Square	10' Square
18' *(Axle Setting of 11'8")	12' Round	12' Round	12' Square	12' Square
20' *(Axle Setting of 12'8")	14' Round	14' round	14' Square	14' Square

Flat Rack and/or Bale Carrier Length

PLEASE REFER TO JBM FLAT RACK/BALE CARRIER CHART

Gravity Box Sizes				
250 Bu.	8 or 10 Ton Wagon 9' Round	N/A	N/A	N/A
250-500 Bu.	12 to 14 Ton Wagon 11' Round	N/A	8' Square	N/A
500-600 Bu.	N/A	N/A	10' Square	N/A
750 Bu.	N/A	N/A	14' Square	N/A

* Axle settings are approximate. Check Forage Box Manufacturer's recommendations.

Multiply The Prices In This Book By 1.05 OR Call For Accurate Quote



CUMMINGS & BRICKER

www.cummingsandbricker.com
support@cummingsandbricker.com

Effective: 01/01/2026

F.O.B. C&B



WAGON GEARS - HORST

WAGON GEAR WHEELS

WAGON GEAR WHEELS - 6 BOLT

ITEMNUMBER	DESCRIPTION	PRICE
WH1566	Wheel 15 X 6 X 6 Bolt	\$86.00
WH1586HD	Wheel 15 X 8 X 6 Bolt - Heavy Duty	\$106.00
WH15106HD	Wheel 15 X 10 X 6 Bolt	\$121.00
WH1666	Wheel 16 X 6 X 6 Bolt	\$92.00
WH1686	Wheel 16 X 8 X 6 Bolt	\$92.00
WH16106	Wheel 16 X 10 X 6 Bolt	\$150.00

WAGON GEAR WHEELS - 8 BOLT

ITEMNUMBER	DESCRIPTION	PRICE
WH15108HD	Wheel 15 X 10 X 8 Bolt - Heavy Duty	\$124.00
WH1688	Wheel 16 X 8 X 8 Bolt	\$144.00
WH16108	Wheel 16 X 10 X 8 Bolt	\$164.00
WH2258258HD	Wheel 22.5 X 8.25 X 8 Bolt - Heavy Duty	\$216.00
WH225138	Wheel 22.5 X 13 X 8 Bolt	\$305.00
WH161118	Wheel W11C X 16.1 X 8 Bolt	\$170.00
WH141618	Wheel W14C X 16.1 X 8 Bolt	\$259.00
WH161618	Wheel WC16C X 16.1 X 8 Bolt	\$290.00

WAGON GEAR WHEELS - 10 BOLT

ITEMNUMBER	DESCRIPTION	PRICE
WH2251310	Wheel 22.5 X 13 X 10 Bolt	\$322.00
WH2251610	Wheel 22.5 X 16 X 10 Bolt	\$727.00

100 LEHIGH AVE.

BATAVIA, NY 14020
PHONE: 800-252-1552 FAX: 888-852-7406

90 STOVER DRIVE
CARLISLE, PA 17015
PHONE: 800-222-8969
FAX: 717-249-9384

Multiply The Prices In This Book By 1.05 OR Call For Accurate Quote



CUMMINGS & BRICKER

www.cummingsandbricker.com
support@cummingsandbricker.com

Effective: 01/01/2026

F.O.B. C&B



WAGON GEARS - HORST

TIRE AND RIM COMBINATIONS

ITEMNUMBER	DESCRIPTION	PRICE
WH1586HD11L158PLY	11L-15 8 Ply Mounted On WH1586 Rim	\$371.00
WH15106HD125L1512	125L-15 10 Ply Mounted On WH15106 Rim	\$489.00
WH15108HD125L1512	125L-15 10 Ply Mounted On WH15108 Rim	\$492.00
WH16106125L1614	125L-16 14 Ply Mounted On WH16106 Rim	\$601.00
WH16108125L1614PLY	125L-16 14 Ply Mounted On WH16108 Rim	\$616.00
WH16111814LX168PLY	14LX161 8 Ply Mounted On WH161118 Rim	\$667.00
WH2258258HD11X225U	11X225 Used Mounted On WH2258258 Rim	\$322.00
WH2258258HD305X225	305X225 Used Truck Tire Mounted On WH2258258HD Rim	\$383.00
WH22511758425X225U	425X225 Used Mounted On WH22511758 Rim	\$518.00
WH225138425X225U	425X225 Used Mounted On WH225138 Rim	\$581.00
WH1686245R16U	245R16 Used Truck Tires Mounted On WH1686 Rims	\$202.00
WH16108245R16U	245R16 Used Truck Tires Mounted On WH16108 Rim	\$274.00

WAGON GEAR TIRES

ITEMNUMBER	DESCRIPTION	PRICE
11L15	Tire 11L X 15 8 Ply Tubeless - Use WH1586,WH15106,or WH15108 Wheel	\$265.00
125L15	Tire 12.5L X 15 10 ply Tubeless - Use WH15106 or WH15108 Wheel	\$368.00
125L1614	Tire 12.5L X 16 14 Ply Tubeless - Use WH16106 or WH16108 Wheel	\$452.00
14LX161	Tire 14L X 16.1 8 Ply Tubeless - Use W111618 Wheel	\$498.00
165X161	Tire 16.5 X 16.1 10 Ply Tubeless - Use WH141618 Wheel	\$771.00
19LX161	Tire 19L X 16.1 10 Ply Tubeless - Use WH161618 Wheel	\$932.00
215X161	Tire 21.5 X 16.1 14 Ply Tubeless - Use WH161618 Wheel	\$1,268.00
11L15HWY	Tire Highway Service 11L X 15 Load Range D, Used With - WH1586HD or WH15108HD Wheel	\$446.00
11L15HWY12	Tire Highway Service 11L X 15 Load Range F, Used With HD Wheel	\$478.00
125L15HWY	Tire Highway Service 12.5L X 15 Load Range F, Used With WH15108HD Wheel	\$544.00
TICHCH	Tire 20.5 X 8-10 12 Ply on 10X6X6 Wheel- Used on CHC Combine Header Carriers	\$270.00
261212	Tire 26 X 12 X 12 Ply Tire on 12X10.5X6 Wheel- Used on CHC Combine Header Carriers	\$397.00
425X225	Tire 425 X 22.5 (16 X 22.5) Used Truck-Tubeless - Use WH22511758 or WH225138 Wheel	\$259.00
385X225	Tire 385 X 22.5 (15 X 22.5) Used Truck-Tubeless - Use WH22511758 Wheel	\$193.00
305X225	Tire 305 X 22.5 (8.25 X 22.5) Used Truck-Tubeless - Use WH2258558HD Wheel	\$167.00
12X225	Tire 12 X 22.5 Used Truck-Tubeless - Use WH2258258 Wheel	\$193.00
11X225	Tire 11 X 22.5 Used Truck-Tubeless - Use WH2258258 Wheel	\$107.00
245R16	Tire 235 Or 245 R16 Used Truck -W/New Tube - Use WH1688 Wheel	\$110.00

100 LEHIGH AVE.

BATAVIA, NY 14020
PHONE: 800-252-1552 FAX: 888-852-7406

90 STOVER DRIVE
CARLISLE, PA 17015
PHONE: 800-222-8969
FAX: 717-249-9384

Multiply The Prices In This Book By 1.05 OR Call For Accurate Quote



CUMMINGS & BRICKER

www.cummingsandbricker.com
support@cummingsandbricker.com

Effective: 01/01/2026


F.O.B. C&B




WAGON GEARS - HORST

WAGON GEAR OPTIONS

ITEMNUMBER	DESCRIPTION	PRICE
NT145325	Narrow Track - Models 145 To 325 (Specify Width)	\$552.00
WT145325	Wide Track - Models 145 To 325 (Specify Width)	\$587.00
NT285865	Narrow Track - Models 285 To 865 (Specify Width)	\$708.00
2WHHDBRAKE	2 Wheel Heavy Duty Hydraulic Disk Brakes(Remote) Available on Models 275/285/308/325/365/485/505/605/608 And TR605	\$3,312.00
4WHHDBRAKE	4 Wheel Heavy Duty Disc Brakes (Remote) Available On Models 308/325/505/605 and 608	\$6,107.00
SB	Spring Balancer For Tongue - Consists of Spring Adjustable Bolt And Two Bolt-On Brackets	\$115.00
SBD	Double Spring Balancer - Required For Spring Cushion Tongues	\$190.00
RB	Rocking Bolster	\$667.00
RBA	Rocking Bolster For Ammonia Tank	\$667.00
WARK4A	4" Riser Kit - For 145/185/185F/205/245 models (including RF models) - Bolt On Kit	\$552.00
WARK4B	4" Riser Kit - For 265 Wagon Gear - Bolt On Kit	\$552.00
WARK2C	2" Riser Kit - For 275/285/325/365/485/505/605 Models - Bolt On Kit	\$575.00
WARK4C	4" Riser Kit - For 275/285/325/365/485/505/605 Models - Bolt On Kit	\$615.00
WARK4E	4" Riser Kit - For 308/608/TR505/TR605 Models - Bolt On Kit - 6 Pieces	\$707.00
WARK6E	6" Riser Kit - For 308/608/TR505/TR605 Models - Bolt On Kit - 6 Pieces	\$891.00

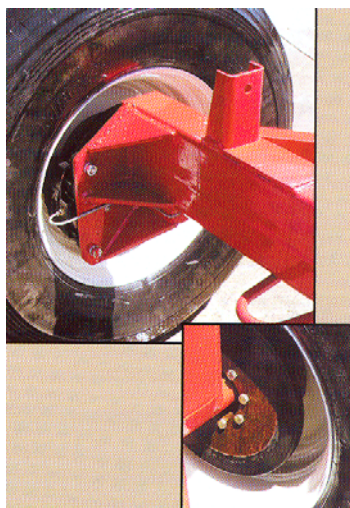

Factory Installed Disc Brakes

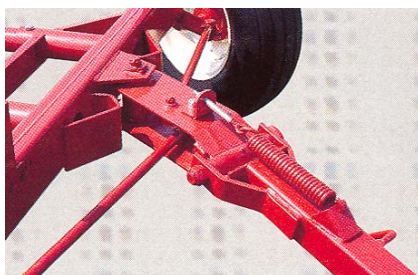

Spring Balancers



Kingpin Bearings – Standard on all wagons



Rocking Bolster

100 LEHIGH AVE.

BATAVIA, NY 14020
PHONE: 800-252-1552 FAX: 888-852-7406

90 STOVER DRIVE
CARLISLE, PA 17015
PHONE: 800-222-8969
FAX: 717-249-9384



CUMMINGS & BRICKER

www.cummingsandbricker.com
support@cummingsandbricker.com



NEW IMPLEMENT TIRES (FARM UTILITY)

Tire	Approx. Height	Ply	Capacity (Lbs/tire)	Description
26 x 12	26"	12 Ply	2,750	Tubeless Tires on 12 x 10.5 x 6 rims
11L x 15	31"	8 Ply	2,540	Farm Utility Tubeless
12.5L x 15	32.25"	12 Ply	3,640	Farm Utility Tubeless
12.5L x 16	33"	14 Ply	4,180	Farm Utility Tubeless
14L x 16.1	36.75"	8 Ply	3,860	Farm Utility Tubeless
14L x 16.1	36"	12 Ply	4,680	Farm Utility Tubeless
16.5 x 16.1	40.5"	10 Ply	5,200	Farm Utility Tubeless
19L x 16.1	42.25"	12 Ply	6,000	Farm Utility Tubeless
21.5 x 16.1	44"	14 Ply	7,850	Farm Utility Tubeless

Tire Ratings are at 25 mph.



26x12 12 Ply



11L x 15 8 Ply



12.5L x 15 12 Ply



12.5L x 16 14 Ply



14L x 16.1 8 Ply



14L x 16.1 12 Ply



16.5 x 16.1 10 Ply



19L x 16.1 12 Ply



21.5 x 16.1 14 Ply

*** Images shown for approximate size and profile of tire and rim package only. Relative wheel picture sizing is approximate.*



Tire	Approx. Height	Load Range	Capacity (Lbs/tire)	Description
20.5 x 8-10	20.5"	F	1,650	Tires on 10 x 6 x 6 rims
225/75 R15	28"	D	2,540	Highway Trailer Tubeless Tires on 15 x 6 x 6 rims
235/85 R16	31.5"	F	3,960	Highway Trailer Tubeless Tires on 16 x 8 x 6 rims
400/55 x 22.5	40.2"	16 Ply	7,820	Highway Flotation Tubeless Tires on 22.5 x 13
550/45 x 22.5	41.2"	16 Ply	9,640	Highway Flotation Tubeless Tires on 22.5 x 16
11L x 15	30.5"	D	3,120	Highway Service Tubeless Tires Must be used with HD rims
11L x 15	31.25"	F	3,960	Highway Service Tubeless Tires Must be used with HD rims
11L x 15	31.5"	F	3,690	Highway Service Tubeless Tires for Header Wagon
12.5L x 15	33.5"	F	4,680	Highway Service Tubeless Tires Must be used with HD rim

Tire Ratings are at 25 mph.



20.5 x 8-10 Load Range F



225/75 R15 Load Range D



235/85 R16 Load Range F



11L x 15 Load Range F



11L x 15 Load Range D



11: x 15 Load Range F



12.5L x 15 Load Range F



Available Sizes:
 550/45 x 22.5 16 Ply
 400/55 x 22.5 16 Ply

**Images shown for approximate size and profile of tire and rim package only. Relative wheel picture sizing is approximate.



CUMMINGS & BRICKER

www.cummingsandbricker.com
support@cummingsandbricker.com

F.O.B. C&B



USED TRUCK TIRES

Tire	Approx Height	Tubeless	Capacity (Lbs/tire)*	Rim Size Required
245 R16	30"	New Tubes	3,500	16 x 8
11 x 22.5	40.5	Tubeless	8,000	22.5 x 8.25 HD
12 or 315 x 22.5	39"	Tubeless	8,000	22.5 x 8.25 HD
385 x 22.5 (15 x 22.5)	41.75"	Tubeless	10,000	22.5 x 11.75
425 x 22.5 (16 x 22.5)	44"	Tubeless	12,000	22.5 x 13 / 22.5 x 11.75

* Capacities on used tires are approximate



245 R16

11 x 22.5

305 x 22.5

12 or 315 x 22.5



385 x 22.5 (15 x 22.5)

425 x 22.5 (16 x 22.5)

USED TIRE WARRANTY

We do our own mounting and use only new tubes. They will all be marked and dated. Any tire which goes flat within 90 days of purchase, we will exchange free if it is returned on the rim that it went flat on.

We do not accept repair bills sent to us.

** Images shown for approximate size and profile of tire and rim package only. Relative wheel picture sizing is approximate.

Multiply The Prices In This Book By 1.05 OR Call For Accurate Quote

HEADER WAGONS | FARM WAGONS



www.horstwagons.com

**2026
Price Book**



Cummings & Bricker, Inc.

Warranty

One Year Limited Warranty

Warranty is active at the time of customer delivery and any claims require the product model and serial number.

All claims must be discussed with a representative from the distributor prior to any repairs or warranty will be void.

This new and unused product is warranted by Horst Welding, to be free from defects in material and workmanship under normal use and regular service as described in the owner's manual, for a period of 1 year from the date of purchase. Warranty is limited to the repair of the product and / or replacement of parts.

Customer: If issues develop within the warranty period with the product, contact the local dealer from which you purchased the unit. Only Horst authorized dealers may make repairs to the product or affect the replacement of defective parts, unless otherwise approved by Horst.

Distributor / Dealer: must notify Horst Welding of the defect before repair / replacement is made. Recommended repairs / replacement and cost are to be discussed with, and agreed on, by an authorized Horst Welding representative. All claims must be accompanied by a photograph of the defective product.

Defective products may be required to be returned to Horst Welding in Listowel, Ontario at the request of Horst Welding. Repairs / Replacement will be done at no charge to the customer within a reasonable time after the receipt of the product.

This warranty does not cover the following items:

1. Normal replacement of service items.
2. Normal maintenance or adjustments.
3. Machines or parts lost or damaged during shipment,
4. Accessory items / parts not supplied by Horst Welding
5. Damages resulting from:
 - misuse, negligence, accident, theft or fire
 - use of improper or insufficient fuel, fluids or lubricants
 - use of after market parts or accessories, unless approved by Horst Welding
 - modifications, alteration, tampering or improper repair
 - any device or accessories installed other than an authorized dealer.
 - using incorrect supplies or supplies not specified in the owners manual.

Horst shall not, in any event, be liable for any losses, damages or costs; to include profits, travel, transportation, pick up, delivery, towing cost, tow vehicle, loss of use, whether special, incidental, consequential or otherwise, in any way. Unit or parts are returned at the customer's expense.

There are no warranties, expressed or implied, other than those specified herein. No agent, employee or other person has any authority to vary any of the foregoing provisions.

All claims must be discussed with a representative from the distributor prior to any repairs or warranty will be void.

Multiply The Prices In This Book By 1.05 OR Call For Accurate Quote

E&OE

Errors and omissions excepted December 2025 Pricing and specifications printed in this catalogue are current at printing and may be subject to change. For current information on all of our products, please contact Horst Welding.

Index

Header Carriers	1	8-Wheel Road Flex	24
Universal Pads	1	308RF (20 ton)24
Features & Options	2	Running Gear	25
2-Wheel Steer	4	4-Wheel Models	25
CHC25	4	145 (8 ton)26
CHC30	4	185 (10 ton)27
CHC36	4	185F (6 ton)28
4-Wheel Steer	5	205 (12 ton)29
CHCF30	5	275 (14 ton)30
CHCF36	5	285 (15 ton)31
CHCF45	5	365E (20 ton)32
4-Wheel Steer Electric Brakes	6	365 (20 ton)33
CHCFE30	6	485 (24 ton)34
CHCFE36	6	6-Wheel Models	35
CHCFE45	6	245 (12 ton)36
Contour Cross Country	7	265 (14 ton)37
CHCFRF30	7	325 (18 ton)38
CHCFRF36	7	505 (22 ton)39
CHCFRF45	7	605 (30 ton)40
Header Wagon Product Specifications	8	8-Wheel Quadsteer Models	41
4-Wheel Steer Heavy Duty	10	308 (20 ton)42
CHCFX35	10	608 (40 ton)43
CHCFX40	10	Reach Pole Guidelines	44
CHCFX45	10	Trailer Chassis	45
CHCFX50	10	TR505 (20 ton)46
CHCFX62	10	TR605 (24 ton)47
CHCFX35JDHD	11	TR505RF Road Flex (20 ton)48
CHCFX40JDHD	11	TR605RF Road Flex (24 ton)49
CHCFX45JDHD	11	Specialty Products	50
CHCFX50JDHD	11	2PH Dolly50
CHCFX Product Specifications	12	Scale Systems51
NEW Tricycle Style Header Cart	14	Wagon Specifications	52
CHCTRF645	14	Running Gear52
CHCTRF Product Specifications	15	Trailer Chassis56
Road Flex Running Gear	16	Standard Features & Options Running Gear57
4-Wheel Road Flex	16	Tire Specifications	58
185RF (10 ton)17	New Implement Tires (Farm Utility)58
205RF (12 ton)18	New Implement Tires (Highway Service)59
285RF (15 ton)19	Used Truck Tires60
365RF (20 ton)20	Tire Pricing61
485RF (24 ton)21	Rim Pricing62
6-Wheel Road Flex	22		
325RF (18 ton)22		
505RF (22 ton)23		

Universal Pads for Header Wagons



Built on our revolutionary triple-axis base, our universal pad provides you with flexible pad configurations. Making this single pad the only pad you'll ever need.

This triple adjustment feature ensures that each resting point is perfectly positioned for your draper head.



Tri-Axis Adjustability

- Up, Down
- Forward, Backward
- Left, Right




Base pad ideal for low profile corn heads or combines with low lifting clearance.



Standard large pad for draper heads (equivalent to previous model large pad).



Highback pad for flex draper head.

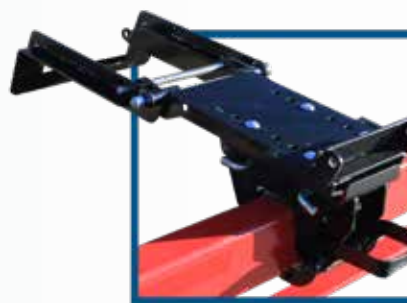

Low back pad for standard cutting platform.




Standard corn head pad with low back.

Note: Universal pads are standard on 4-wheel steer header wagons and are optional on 2-wheel steer models.

Honey Bee Compatible

The HBAFK Honey Bee AirFLEX® Pad Adapter Kit is designed to bolt on to the Honey Bee AirFLEX® mid paddle supports. The adapter allows the Honey Bee's unique design to work with the header pads on Horst header wagons.

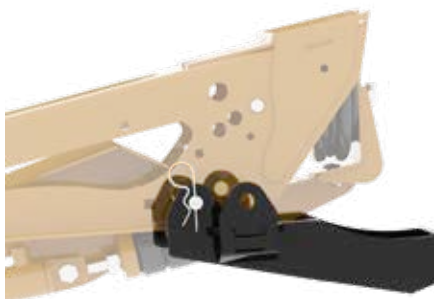

HEADER WAGONS

FEATURES AND OPTIONS



Adjustable Top Rail

The adjustable top rail ensures our wagons can fit most sizes and models of combine heads.



Quick Release

The quick release header mount makes repositioning the header mount easy. Simply lower the over-center locking handles, reposition the mount and relock the mount.



Ratchet Straps

These heavy duty ratchet straps are repositionable to match the best possible strapping location for your head. Because they are free floating they are a snap to release.



Reinforced Bottom Rail

The reinforced bottom rail comes standard on all header wagons with 24 ft or greater wheelbase.

A heavy duty bottom rail option is available for select models.



Brakes

Contour Cross Country and CHCFX models feature standard 4-wheel electric drum brakes, to give you more control and confidence when transporting your head from field to field. Contour CHCFE comes standard with 2 rear brakes.



Suspension **Patented**

Contour Cross Country builds on the proven Contour 4 wheel steer platform by adding 4 wheel independent suspension. This patented innovation not only smooths out bumps, it gives added clearance when turning adding even more protection for your head.





Spare Tire Carrier

The Spare Tire Carrier is available for all 4 Wheel Steer Header Wagons. This kit can be added to new units at time of order or as an upgrade to existing units in the field.



Tongue

Adjustable Hitch with auto lock for simple hookup.

Double spring balancer is standard equipment on all models except CHC series.

Single or double spring balancer option available for CHC series.



Tapered Roller Bearings

Roller bearings are used in your main pivot points keeping them tight, ensuring no trailer sway and long lasting use.



Improved Steering

Horst Header Wagons feature an improved steering system that provides tighter steering when following the tow vehicle and prevents bent tongues.



Wheels

Highway rated tires are available on all models and standard on Contour Cross Country and CHCFX models to make sure you are not trailing behind.



Fenders

Add even more protection for your header and tow vehicle with these optional fenders. These corrosion and dent resistant fenders prevent dirt and stones being thrown at your header and tow vehicle.

The Contour Cross Country models come standard with fenders.



Road Signal Light Kit

Make road travel safer by adding the road signal light kit which includes brake, turning and hazard lights.

The Contour Cross Country models come standard equipped with rear signal and side running lights on fenders and rails.

CHC HEADER WAGONS

Fits 25' to 35' Heads
2 Wheel Steer



CHC30 shown

- Tapered roller bearings on king pins for absolute no sway trailing
- Includes 2 tool free configurable standard pads
- 2 Ratchet straps to secure load
- Bridged bottom rail on CHC36
- Grade 70 safety chain
- Length adjustable hitch with auto lock for simple hook up

Model Number	Description	GVWR	Price
CHC25	Model for up to 25' heads (18' wheelbase and 26' top rail)		
	with 20.5 x 8 - 10 (F Range) tire on 10 x 6 x 6 rim	6,600 lbs.	\$5,612.00
	with 26 x 12 12 ply tire on 12 x 10.5 x 6 rim	10,000 lbs.	\$6,116.00
	with 225/75 R15 (D Range) Highway Trailer tire on 15 x 6 x 6 rim	10,000 lbs.	\$5,992.00
	with 235/85 R16 (F Range) Highway Trailer tire on 16 x 8 x 6 rim	10,000 lbs.	\$6,368.00
CHC30	with 11L x 15 (F Range) Highway Service tire on 15 x 8 x 6 HD rim	10,000 lbs.	\$6,868.00
	Model for up to 30' heads (18' wheelbase and 31' top rail)		
	with 20.5 x 8 - 10 (F Range) tire on 10 x 6 x 6 rim	6,600 lbs.	\$5,882.00
	with 26 x 12 12 ply tire on 12 x 10.5 x 6 rim	10,000 lbs.	\$6,386.00
	with 225/75 R15 (D Range) Highway Trailer tire on 15 x 6 x 6 rim	10,000 lbs.	\$6,262.00
CHC36	with 235/85 R16 (F Range) Highway Trailer tire on 16 x 8 x 6 rim	10,000 lbs.	\$6,638.00
	with 11L x 15 (F Range) Highway Service tire on 15 x 8 x 6 HD rim	10,000 lbs.	\$7,138.00
	Model for up to 35' heads (24' wheelbase and 36' top rail)		
	with 26 x 12 12 ply tire on 12 x 10.5 x 6 rim	10,000 lbs.	\$7,806.00
	with 225/75 R15 (D Range) Highway Trailer tire on 15 x 6 x 6 rim	10,000 lbs.	\$7,682.00
	with 235/85 R16 (F Range) Highway Trailer tire on 16 x 8 x 6 rim	10,000 lbs.	\$8,058.00
	with 11L x 15 (F Range) Highway Service tire on 15 x 8 x 6 HD rim	10,000 lbs.	\$8,558.00

GVWR capacity changes depending on selected tire option.

Model Number	Options	Fits Models	Price
CHCLPO	Universal Pads - increase the versatility of your wagon with this option (See page 1 for details) (upgrade includes both pads in lieu of standard pad at time of manufacture)	All	\$673.00
LK18	Road signal light kit for 18' wheelbase	CHC25 CHC30	\$771.00
LK24	Road signal light kit for 24' wheelbase	CHC36	\$771.00
CHCRB18HD	Heavy duty bottom rail option - is designed for headers that require extra support along the mid section (in lieu of standard rail at time of manufacture) 18' wheelbase	CHC25 CHC30	\$1,720.00
HBAFK	Honey Bee AirFLEX® pad adapter kit (See page 1 for details)	CHC30 CHC36	\$305.00
SB	Single spring tongue balancer	All	\$115.00
SBD	Double spring tongue balancer	All	\$190.00



CHCF HEADER WAGONS

Fits 30' to 45' Heads
4 Wheel Steer



CHCF45 w/ optional HD bottom rail shown

- Tapered roller bearings on king pins for absolute no sway trailing
- Includes 2 tool free configurable universal pads
- 2 Ratchet straps to secure load
- 4 Wheel steering
- 30 ft. wheelbase has reinforced bottom rail
- Grade 70 safety chain
- Double spring balancer
- Length adjustable hitch with auto lock for simple hook up

Model Number	Description	GVWR	Price
CHCF30	Model for up to 30' heads (18' wheelbase and 31' top rail)		
	with 20.5 x 8 - 10 (F Range) tire on 10 x 6 x 6 rim	6,600 lbs.	\$8,077.00
	with 26 x 12 12 ply tire on 12 x 10.5 x 6 rim	11,000 lbs.	\$8,581.00
	with 235/85 R16 (F Range) Highway Trailer tire on 16 x 8 x 6 rim	15,500 lbs.	\$8,833.00
CHCF36	Model for up to 35' heads (30' wheelbase and 36' top rail)		
	Special 27' wheelbase model #CHCF3627 avail.		
	with 26 x 12 12 ply tire on 12 x 10.5 x 6 rim	11,000 lbs.	\$10,802.00
	with 235/85 R16 (F Range) Highway Trailer tire on 16 x 8 x 6 rim	15,500 lbs.	\$11,054.00
CHCF45	Model for up to 45' heads (30' wheelbase and 46' top rail)		
	Special 27' wheelbase model #CHCF4527 avail.		
	with 26 x 12 12 ply tire on 12 x 10.5 x 6 rim	11,000 lbs.	\$11,722.00
	with 235/85 R16 (F Range) Highway Trailer tire on 16 x 8 x 6 rim	15,500 lbs.	\$11,974.00
	with 11L x 15 (F Range) Highway Service tire on 15 x 8 x 6 HD rim	15,500 lbs.	\$12,474.00

GVWR capacity changes depending on selected tire option.

Model Number	Options	Fits Models	Price
LK18	Road signal light kit for 18' wheelbase	CHCF30	\$771.00
LK30	Road signal light kit for 30' wheelbase	CHCF36 CHCF45	\$771.00
CHCFK	Fender kit - keep your header protected from road debris	All	\$1,081.00
CHCRB18HD	Heavy duty bottom rail option - is designed for headers that require extra support along the mid section (in lieu of standard rail at time of manufacture) 18' wheelbase	CHCF30	\$1,720.00
CHCRB30HD	Heavy duty bottom rail option - is designed for headers that require extra support along the mid section (in lieu of standard rail at time of manufacture) 30' wheelbase	CHCF36 CHCF45	\$1,127.00
CHCFSTC	Spare tire carrier kit (See tire and rim pricing on page 61-62)	All	\$288.00
HBAFK	Honey Bee AirFLEX® pad adapter kit (See page 1 for details)	All	\$305.00



CHCFE HEADER WAGONS

Fits 30' to 45' Heads

4 Wheel Steer

Rear Electric Brakes



CHCFE30 shown

- Tapered roller bearings on king pins for absolute no sway trailing
- Includes 2 tool free configurable universal pads
- 2 Ratchet straps to secure load
- 4 Wheel steering
- 2 Wheel electric brakes (on rear axle)
- 30 ft. wheelbase has reinforced bottom rail
- Light kit (red lenses)
- 2-5/16 ball hitch and grade 70 safety chain
- Double spring balancer
- Length adjustable hitch with auto lock for simple hook up
- 235/85 R16 (F Range) Highway trailer tire on 16 x 8 x 6 rim

Model Number	Description	GVWR	Price
CHCFE30	Model for up to 30' heads (18' wheelbase and 31' top rail)		
	with 235/85 R16 (F Range) Highway Trailer tire on 16 x 8 x 6 rim	10,400 lbs.	\$11,070.00
CHCFE36	Model for up to 35' heads (30' wheelbase and 36' top rail)		
	Special 27' wheelbase model #CHCFE3627 avail.		
	with 235/85 R16 (F Range) Highway Trailer tire on 16 x 8 x 6 rim	10,400 lbs.	\$13,291.00
CHCFE45	Model for up to 45' heads (30' wheelbase and 46' top rail)		
	Special 27' wheelbase model #CHCFE4527 avail.		
	with 235/85 R16 (F Range) Highway Trailer tire on 16 x 8 x 6 rim	10,400 lbs.	\$14,211.00

Model Number	Options	Fits Models	Price
CHCFK	Fender kit - keep your header protected from road debris	All	\$1,081.00
CHCRB18HD	Heavy duty bottom rail option - is designed for headers that require extra support along the mid section (in lieu of standard rail at time of manufacture) 18' wheelbase	CHCFE30	\$1,720.00
CHCRB30HD	Heavy duty bottom rail option - is designed for headers that require extra support along the mid section (in lieu of standard rail at time of manufacture) 30' wheelbase	CHCFE36 CHCFE45	\$1,127.00
CHCFSTC	Spare tire carrier kit (See tire and rim pricing on page 61-62)	All	\$288.00
HBAFK	Honey Bee AirFLEX® pad adapter kit (See page 1 for details)	All	\$305.00

CHCFRF HEADER WAGONS



Fits 30' to 45' Heads
4 Wheel Steer
4 Wheel Electric Brakes
4 Wheel Independent Suspension



CHCFRF45 shown

- Tapered roller bearings on king pins for absolute no sway trailing
- Includes 2 tool free configurable universal pads
- 2 Ratchet straps to secure load
- 4 Wheel steering
- 4 Wheel electric brakes
- 4 Wheel independent suspension
- 30 ft. wheelbase has reinforced bottom rail
- 235/85 R16 (F Range) Highway trailer tire on 16 x 6 x 8 rim
- Wheel fenders
- Running lights on fenders and rails
- Light kit (red lenses)
- 2-5/16 ball hitch and grade 70 safety chains
- Vehicle Identification Number for licensing †
- Double spring balancer
- Length adjustable hitch with auto lock for simple hook up

Model Number	Description	GVWR	Price
CHCFRF30	Model for up to 30' heads (18' wheelbase and 31' top rail)		
	with 235/85 R16 (F Range) Highway Trailer tire on 16 x 6 x 8 rim	14,000 lbs.	\$16,022.00
CHCFRF36	Model for up to 35' heads (30' wheelbase and 36' top rail)		
	Special 27' wheelbase model #CHCFRF3627 avail.		
	with 235/85 R16 (F Range) Highway Trailer tire on 16 x 6 x 8 rim	14,000 lbs.	\$18,243.00
CHCFRF45	Model for up to 45' heads (30' wheelbase and 46' top rail)		
	Special 27' wheelbase model #CHCFRF4527 avail.		
	with 235/85 R16 (F Range) Highway Trailer tire on 16 x 6 x 8 rim	14,000 lbs.	\$19,163.00

Model Number	Options	Fits Models	Price
CHCRB18HD	Heavy duty bottom rail option - is designed for headers that require extra support along the mid section (in lieu of standard rail at time of manufacture) 18' wheelbase	CHCFRF30	\$1,720.00
CHCRB30HD	Heavy duty bottom rail option - is designed for headers that require extra support along the mid section (in lieu of standard rail at time of manufacture) 30' wheelbase	CHCFRF36 CHCFRF45	\$1,127.00
CHCFSTC	Spare tire carrier kit (See tire and rim pricing on page 61-62)	All	\$288.00
HBAFK	Honey Bee AirFLEX® pad adapter kit (See page 1 for details)	All	\$305.00

† Licensing requirements may vary - Check local requirements.

Multiply The Prices In This Book By 1.05 OR Call For Accurate Quote

Model	Contour (4 Wheel Steer)		
	CHCF30	CHCF36	CHCF45
GVWR*	15,500 lbs.	15,500 lbs.	15,500 lbs.
Wheelbase	18'	30'	30'
Tongue Length (Adjustable)	11' 4" to 15' 10"	11' 4" to 15' 10"	11' 4" to 15' 10"
Top Rail Length	31'	36'	46'
Bridged Top & Bottom Rail	-	Standard	Standard
Maximum Head Size	30'	35'	45'
Grade 70 Safety Chain	Standard	Standard	Standard
Road Signal Light Kit	Optional	Optional	Optional
Fenders	Optional	Optional	Optional
Approx. Weight**	2,305 lbs.	3,395 lbs.	3,495 lbs.

Model	Contour (4 Wheel Steer / Rear Brakes)	
	CHCFE30	CHCFE36
GVWR*	10,400 lbs.	10,400 lbs.
Wheelbase	18'	30'
Tongue Length (Adjustable)	11' 9" to 16' 3"	11' 9" to 16' 3"
Top Rail Length	31'	36'
Bridged Top & Bottom Rail	-	Standard
Maximum Head Size	30'	35'
Grade 70 Safety Chain	Standard	Standard
Road Signal Light Kit	Standard	Standard
Fenders	Optional	Optional
Approx. Weight**	2,470 lbs.	3,480 lbs.

Tire & Rim Options			
20.5 x 8-10 (F Range) tire on 10 x 6 x 6 rim	6,600 lbs.	-	-
26 x 12 12 ply tire on 12 x 10.5 x 6 rim	11,000 lbs.	11,000 lbs.	11,000 lbs.
225/75 R15 (D Range) Highway Trailer Tire on 15 x 6 x 6 rim	-	-	-
235/85 R16 (F Range) Highway Trailer Tire on 16 x 8 x 6 rim	15,500 lbs.	15,500 lbs.	15,500 lbs.
235/85 R16 (F Range) Highway Trailer Tire on 16 x 6 x 8 rim	-	-	-
11L x 15 (F Range) Highway Service Tire on 15 x 8 x 6 HD rim	15,500 lbs.	15,500 lbs.	15,500 lbs.

-	-
-	-
-	-
10,400 lbs.	10,400 lbs.
-	-
-	-

Model	2 Wheel Steer		
	CHC25	CHC30	CHC36
GVWR*	10,000 lbs.	10,000 lbs.	10,000 lbs.
Wheelbase	18'	18'	24'
Tongue Length (Adjustable)	11' 3" to 12' 9"	11' 3" to 12' 9"	11' 3" to 12' 9"
Top Rail Length	26'	31'	36'
Bridged Top & Bottom Rail	-	-	Standard
Maximum Head Size	25'	30'	35'
Grade 70 Safety Chain	Standard	Standard	Standard
Road Signal Light Kit	Optional	Optional	Optional
Fenders	-	-	-
Approx. Weight**	1,775 lbs.	1,820 lbs.	2,590 lbs.

Tire & Rim Options			
20.5 x 8-10 (F Range) tire on 10 x 6 x 6 rim	6,600 lbs.	6,600 lbs.	-
26 x 12 12 ply tire on 12 x 10.5 x 6 rim	10,000 lbs.	10,000 lbs.	10,000 lbs.
225/75 R15 (D Range) Highway Trailer Tire on 15 x 6 x 6 rim	10,000 lbs.	10,000 lbs.	10,000 lbs.
235/85 R16 (F Range) Highway Trailer Tire on 16 x 8 x 6 rim	10,000 lbs.	10,000 lbs.	10,000 lbs.
11L x 15 (F Range) Highway Service Tire on 15 x 8 x 6 HD rim	10,000 lbs.	10,000 lbs.	10,000 lbs.

* The rated capacities provided are for the chassis only, tire selection determines GVWR. ** Noted weights are approximate and less rims and tires.

Multiply The Prices In This Book By 1.05 OR Call For Accurate Quote

CHCFE45	
	10,400 lbs.
	30'
	11' 9" to 16' 3"
	46'
	Standard
	45'
	Standard
	Standard
	Optional
	3,580 lbs.

Contour Cross Country (4 Wheel Steer)		
CHCFRF30	CHCFRF36	CHCFRF45
14,000 lbs.	14,000 lbs.	14,000 lbs.
18'	30'	30'
11' 9" to 16' 3"	11' 9" to 16' 3"	11' 9" to 16' 3"
31'	36'	46'
Standard	Standard	Standard
30'	35'	45'
Standard	Standard	Standard
Standard	Standard	Standard
Standard	Standard	Standard
Standard	Standard	Standard
3,395 lbs.	4,480 lbs.	4,580 lbs.

	-
	-
	-
	10,400 lbs.
	-
	-

	-	-	-
	-	-	-
	-	-	-
	-	-	-
	14,000 lbs.	14,000 lbs.	14,000 lbs.
	-	-	-

CHCFX HEADER WAGONS

Fits 35' to 62' Heads
4 Wheel Steer
Electric Brakes



- Tapered roller bearings on king pins for absolute no sway trailing
- Includes 2 tool free configurable universal pads
- 2 Ratchet straps to secure load
- 4 Wheel steering
- Grade 70 safety chain
- 4 Wheel electric brakes (12 1/4" x 5" Drum)
- Double spring balancer
- Length adjustable hitch with auto lock for simple hook up
- 235/75 R17.5 (16 ply) tires on 17.5 x 6.75 x 8 rim
- Rear lights with brake and turn signals
- 2 5/16" ball hitch or 2.5" pintle ring hitch
- 7 Pin RV / brake light plug
- 12,000 lbs. Axles with 8 bolt high speed automotive hubs

Model Number	Description	GVWR	Price
CHCFX35	Model for up to 35' heads (35' wheelbase and 36' top rail)		
	with 235/75 R17.5 (16 ply) Highway Trailer tire on 17.5 x 6.75 x 8 rim	24,000 lbs.	\$20,576.00
	with 320/70 R15 IF Flotation Tire on 15 x 10 x 8 HD rim	24,000 lbs.	\$23,340.00
CHCFX40	Model for up to 40' heads (35' wheelbase and 42' top rail)		
	with 235/75 R17.5 (16 ply) Highway Trailer tire on 17.5 x 6.75 x 8 rim	24,000 lbs.	\$21,163.00
	with 320/70 R15 IF Flotation Tire on 15 x 10 x 8 HD rim	24,000 lbs.	\$23,927.00
	40' wheelbase in lieu of 35' wheelbase at time of manufacture	24,000 lbs.	\$2,496.00
CHCFX45	Model for up to 45' heads (40' wheelbase and 46' top rail)		
	with 235/75 R17.5 (16 ply) Highway Trailer tire on 17.5 x 6.75 x 8 rim	24,000 lbs.	\$24,343.00
	with 320/70 R15 IF Flotation Tire on 15 x 10 x 8 HD rim	24,000 lbs.	\$27,107.00
	43' wheelbase in lieu of 40' wheelbase at time of manufacture	24,000 lbs.	\$2,455.00
CHCFX50	Model for up to 50' heads (43' wheelbase and 52' top rail)		
	with 235/75 R17.5 (16 ply) Highway Trailer tire on 17.5 x 6.75 x 8 rim	24,000 lbs.	\$27,338.00
	with 320/70 R15 IF Flotation Tire on 15 x 10 x 8 HD rim	24,000 lbs.	\$30,102.00
	48' wheelbase in lieu of 43' wheelbase at time of manufacture	24,000 lbs.	\$2,605.00
CHCFX62	Model for up to 62' heads (48' wheelbase and 64' top rail)		
	with 235/75 R17.5 (16 ply) Highway Trailer tire on 17.5 x 6.75 x 8 rim	24,000 lbs.	\$31,122.00
	with 320/70 R15 IF Flotation Tire on 15 x 10 x 8 HD rim	24,000 lbs.	\$33,886.00

Model Number	Options	Fits Models	Price
CHCFXFK	Fender kit - keep your header protected from road debris (235/75 only)	All	\$1,363.00
CHCFXSTC	Spare tire carrier kit (See tire and rim pricing on page 61-62)	All	\$288.00
CHCFXPRH	2.5" pintle ring hitch (in lieu of ball hitch at time of manufacture)	All	\$391.00
CHCFXMD261	Hardware kit upgrade with supports for Macdon FD261 Header	CHCFX62	\$1,875.00
CHCFXMD250	Hardware kit upgrade with supports for Macdon FD250 Header	CHCFX50	\$1,122.00
HBAFK	Honey Bee AirFLEX® pad adapter kit (See page 1 for details)	All	\$305.00

CHCFXJDHD HEADER WAGONS

Fits 35' to 50' Heads
4 Wheel Steer
Electric Brakes



- Tapered roller bearings on king pins for absolute no sway trailing
- Includes 4 custom pads specific to JD Hinged Draper heads
- 6 Ratchet straps to secure load (4 on CHCFX35JDHD)
- 4 Wheel steering
- Grade 70 safety chain
- 4 Wheel electric brakes (12 1/4" x 5" Drum)
- Double spring balancer
- Length adjustable hitch with auto lock for simple hook up
- 235/75 R17.5 (16 ply) tires on 17.5 x 6.75 x 8 rim
- Rear lights with brake and turn signals
- 2 5/16" ball hitch or 2.5" pintle ring hitch
- 7 Pin RV / brake light plug
- 12,000 lbs. Axles with 8 bolt high speed automotive hubs

Model Number	Description	GVWR	Price
CHCFX35JDHD	Model for JD HD35R, HD35F and HD35X heads (35' wheelbase and 36' top rail)		
	with 235/75 R17.5 (16 ply) Highway Trailer tire on 17.5 x 6.75 x 8 rim	24,000 lbs.	\$22,307.00
	with 320/70 R15 IF Flotation Tire on 15 x 10 x 8 HD rim	24,000 lbs.	\$25,071.00
CHCFX40JDHD	Model for JD HD40R, HD40F and HD40X heads (40' wheelbase and 42' top rail)		
	with 235/75 R17.5 (16 ply) Highway Trailer tire on 17.5 x 6.75 x 8 rim	24,000 lbs.	\$25,534.00
	with 320/70 R15 IF Flotation Tire on 15 x 10 x 8 HD rim	24,000 lbs.	\$28,298.00
CHCFX45JDHD	Model for JD HD45R, HD45F and HD45X heads (43' wheelbase and 46' top rail)		
	with 235/75 R17.5 (16 ply) Highway Trailer tire on 17.5 x 6.75 x 8 rim	24,000 lbs.	\$28,673.00
	with 320/70 R15 IF Flotation Tire on 15 x 10 x 8 HD rim	24,000 lbs.	\$31,437.00
CHCFX50JDHD	Model for JD HD50R and HD50F heads (48' wheelbase and 52' top rail)		
	with 235/75 R17.5 (16 ply) Highway Trailer tire on 17.5 x 6.75 x 8 rim	24,000 lbs.	\$31,818.00
	with 320/70 R15 IF Flotation Tire on 15 x 10 x 8 HD rim	24,000 lbs.	\$34,582.00

Model Number	Options	Fits Models	Price
CHCFXFK	Fender kit - keep your header protected from road debris (235/75 only)	All	\$1,363.00
CHCFXSTC	Spare tire carrier kit (See tire and rim pricing on page 61-62)	All	\$288.00
CHCFXPRH	2.5" pintle ring hitch (in lieu of ball hitch at time of manufacture)	All	\$391.00

CHCFX SPECIFICATIONS

Model	4 Wheel Steer				
	CHCFX35	CHCFX40	CHCFX45	CHCFX50	CHCFX62
GVWR	24,000 lbs.	24,000 lbs.	24,000 lbs.	24,000 lbs.	24,000 lbs.
Wheelbase	35'	35' (40')	40' (43')	43' (48')	48'
Tongue Length (Adjustable)	11' 10" to 16' 3"	11' 10" to 16' 3"	11' 10" to 16' 3"	11' 10" to 16' 3"	11' 10" to 16' 3"
Top Rail Length	36'	42'	46'	52'	64'
Bridged Top & Bottom Rail	Yes	Yes	Yes	Yes	Yes
Maximum Head Size	35'	40'	45'	50'	62'
Grade 70 Safety Chain	Standard	Standard	Standard	Standard	Standard
Road Signal Light Kit	Standard	Standard	Standard	Standard	Standard
Fenders	Optional	Optional	Optional	Optional	Optional
Approx. Weight*	5,980 lbs.	6,195 lbs.	6,980 lbs.	7,545 lbs.	8,490 lbs.

Tire & Rim Options					
235/75 R17.5 (16 ply) on 17.5 x 6.75 x 8 Bolt	24,000 lbs.	24,000 lbs.	24,000 lbs.	24,000 lbs.	24,000 lbs.
320/70 R15 (Flotation) on 15 x 10 x 8 HD rim	24,000 lbs.	24,000 lbs.	24,000 lbs.	24,000 lbs.	24,000 lbs.


* Noted weights are approximate and less rims and tires.

FEATURES

Universal Pads

Our industry leading universal pads come standard on CHCFX models.

(CHCFX models only)

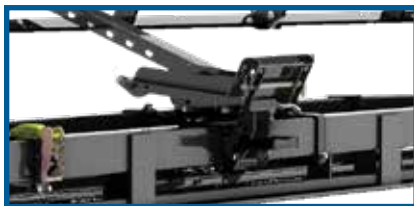

Heavy Duty Axles

12,000 lbs. axles with 8 bolt high speed automotive hubs.

(CHCFX & CHCFXJDHD)



Road Light Kit

The road light kit adds brake, turning, and hazard lights for safe operating during low visibility conditions.

(CHCFX & CHCFXJDHD)



CHCFXJDHD SPECIFICATIONS

Model	4 Wheel Steer			
	CHCFX35JDHD	CHCFX40JDHD	CHCFX45JDHD	CHCFX50JDHD
GVWR	24,000 lbs.	24,000 lbs.	24,000 lbs.	24,000 lbs.
Wheelbase	35'	40'	43'	48'
Tongue Length (Adjustable)	11' 10" to 16' 3"	11' 10" to 16' 3"	11' 10" to 16' 3"	11' 10" to 16' 3"
Top Rail Length	36'	42'	46'	52'
Bridged Top & Bottom Rail	Yes	Yes	Yes	Yes
Maximum Head Size	35'	40'	45'	50'
Grade 70 Safety Chain	Standard	Standard	Standard	Standard
Road Signal Light Kit	Standard	Standard	Standard	Standard
Fenders	Optional	Optional	Optional	Optional
Approx. Weight*	6,145 lbs.	6,805 lbs.	7,615 lbs.	8,140 lbs.

Tire & Rim Options

235/75 R17.5 (16 ply) on 17.5 x 6.75 x 8 Bolt	24,000 lbs.	24,000 lbs.	24,000 lbs.	24,000 lbs.
320/70 R15 (Flotation) on 15 x 10 x 8 HD rim	24,000 lbs.	24,000 lbs.	24,000 lbs.	24,000 lbs.

* Noted weights are approximate and less rims and tires.

Electric Brakes

Four electric drum brakes, to give you more control and confidence when transporting your header from field to field.


(CHCFX & CHCFXJDHD)



Made-to-Measure Pads

Designed specifically for all JDHD35-50 R, F & X models. Providing a stable travel platform.

(CHCFXJDHD)

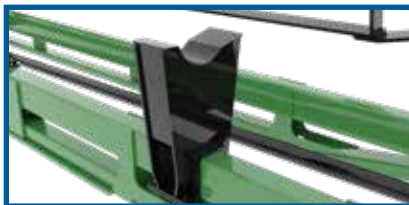

Pintle Ring Hitch

Optional 2.5" pintle ring hitch (in lieu of ball hitch at time of manufacture).

(CHCFX & CHCFXJDHD)



NEW

Multiply The Prices In This Book By 1.05 OR Call For Accurate Quote

TRICYCLE STYLE HEADER CART



Fits Heads up to 45'
6 Wheel Suspension
Electric Brakes



STANDARD FEATURES

- Tapered roller bearing on the front dolly kingpin for absolute no sway trailering
- Hauls headers up to 45 ft
- Includes 2 tool free configurable universal pads
- Compatible with JD HD35, HD40, and HD45
- Optional pad/cradle set for JD Hinged Headers
- 2 Ratchet straps to secure load (up to 6 optional)
- Safety chains
- 6 Wheel independent suspension
- 6 Wheel electric brakes
- Spring balancer on tongue
- Length adjustable hitch with auto lock
- Wheelbase Adjustable from 33.5 ft to 40 ft
- 235/85 R16 (F Range) Highway trailer tire on 16 x 6 x 8 rim
- Rear lights with brake and turn signals
- 2 5/16" ball hitch
- 7 Pin RV / brake light plug
- Net weight capacity 13,500 lbs.
- 7,000 lbs. axles with 8 bolt high speed automotive hubs

Model Number	Description	GVWR	Price
CHCTRF645	Heads up to 45' (adj. wheelbase 33.5-40 ft and 46' top rail) with 235/85 R16 (F Range) tire on 16 x 6 x 8 Rim	21,000 lbs.	\$19,429.00

Model Number	Options	Fits Models	Price
CHCTRF6FK	Fender kit - keep your header protected from road debris	All	\$1,622.00
CHCTRFJDHD	Hardware kit upgrade with supports for John Deere Hinged Header	All	\$1,875.00

CHCTRF SPECIFICATIONS

SPECIFICATIONS	6 Wheel Suspension
Model	CHCTRF645
GVWR	21,000 lbs.
Wheelbase	Adjustable 33.5 - 40 ft.
Tongue Length (Adjustable)	6' 8" to 9' 7"
Top Rail Length	46'
Top Rail	Bridged
Bottom Rail	10" x 4" 1/4" wall tube preloaded with 3" crown
Maximum Head Size	45'
Grade 70 Safety Chain	Standard
Road Signal Light Kit	Standard
Fenders	Optional
Approx. Weight*	7,200 lbs.

* Noted weights are approximate and less rims and tires.

FEATURES

Adjustable Rear Axles

Each rear axle can be independently positioned to suit specific header setup requirements.

Suspension **Patented**

The CHCTRF645 is equipped with Road Flex suspension in both rear axles and the front dolly wheel, greatly reducing the towing stress on your header.





SMOOTH TRAVEL ROAD FLEX WAGONS

Ideal for high speed tractors our new line of ROAD FLEX running gear use suspension blocks to help eliminate bumps and vibrations when traveling down the road or through the field. ROAD FLEX suspension not only reduces the stress from towing heavy loads but also provides increased stability to Horst wagons. In addition Road Flex suspension provides independent four wheel suspension which eliminates the need for rocking bolsters.

NOTE: The rated capacities provided are for the chassis only and rims and tires should be matched accordingly when ordered.



STANDARD FEATURES



RETRACTABLE AUTOMATIC RELOCK TONGUE LATCH
(with standard variable adjustment)

Take the precision work out of hooking up by freely moving the tongue into place and watch it lock into place as soon as it's in motion.



TAPERED ROLLER BEARINGS IN MAIN PIVOT POINTS

Roller bearings keep pivot points tight, ensuring no trailer sway and long-lasting use.



AUTOMOTIVE BALL JOINTS

Automotive style ball joints not only keep our wagons behind you they also provide years of hard working service.



ROAD FLEX

Road Flex suspension uses shock absorbing blocks to reduce the amount of bounce the wagon encounters as it's pulled down the road or across the field.



SAFETY CHAINS

Grade 70 safety chains to help provide safe towing

MODEL 185RF

SUSPENSION WAGON



FEATURES

- 10 ton (20,000 lbs.)
- Road Flex Suspension
- Quick hitch tongue
- Standard reach length 11'
- Wheelbase adjustable 8' 8" - 11' 2"
- Hubs - 6 Bolt
- Safety chain (3/8" Gr. 70)



Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
11L x 15	8 Ply	15 x 8 x 6 HD	76"	10,150	\$7,011.00	\$5,951.00	\$5,523.00
225/75 R15	D Range	15 x 6 x 6	76"	10,150	\$6,987.00	\$5,871.00	\$5,523.00
12.5L x 15	12 Ply	15 x 10 x 6 HD	78"	14,550	\$7,479.00	\$6,007.00	\$5,523.00
245 R16	Used Truck*	16 x 8 x 6	76"	14,000	\$6,331.00	\$5,891.00	\$5,523.00
11L x 15	D Range / Hwy Ser.	15 x 8 x 6 HD	76"	12,450	\$7,735.00	\$5,951.00	\$5,523.00
11L x 15	F Range / Hwy Ser.	15 x 8 x 6 HD	76"	15,800	\$7,863.00	\$5,951.00	\$5,523.00

Options	Price
Optional Reach Lengths: 9', 12', 14', 16', 18', 20', 22'	
Add or subtract price per foot for over or under 11' (includes both reach poles)	\$36.00
High clearance option (6" increase - refer to specification page 52)	\$575.00
Narrow track (Custom Build) down to 60" (stake posts may ship loose)	\$552.00
Wide track (Custom Build) up to 90"	\$587.00
Wide track (Custom Build) over 90"	\$1,110.00
Single spring tongue balancer	\$115.00
Double spring tongue balancer	\$190.00
4" bolt on riser kit (other heights available)	\$552.00

*Used tires may not meet local regulations, check with your local authority before purchasing.

MODEL 205RF

SUSPENSION WAGON



FEATURES

- 12 ton (24,000 lbs.)
- Road Flex Suspension
- Quick hitch tongue
- Standard reach length 11'
- Wheelbase adjustable 8' 8" - 11' 2"
- Hubs - 8 Bolt
- Safety chain (3/8" Gr. 70)



Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
12.5L x 16	14 Ply	16 x 10 x 8	82"	16,700	\$8,804.00	\$6,996.00	\$6,340.00
12.5L x 15	F Range / Hwy Ser.	15 x 10 x 8 HD	82"	14,550	\$9,012.00	\$6,836.00	\$6,340.00
16.5 x 16.1	14 Ply	16.1 x W14C x 8	86"	24,000	\$10,460.00	\$7,376.00	\$6,340.00
11 x 22.5	Used Truck*	22.5 x 8.25 x 8 HD	82"	24,000	\$7,632.00	\$7,204.00	\$6,340.00
12 or 315 x 22.5	Used Truck*	22.5 x 8.25 x 8 HD	82"	24,000	\$7,976.00	\$7,204.00	\$6,340.00
305 x 22.5	Used Truck*	22.5 x 8.25 x 8 HD	82"	24,000	\$7,872.00	\$7,204.00	\$6,340.00
385 x 22.5	Used Truck*	22.5 x 11.75 x 8	88"	24,000	\$8,148.00	\$7,376.00	\$6,340.00
385 x 22.5	New Truck	22.5 x 11.75 x 8	88"	24,000	\$11,644.00	\$7,376.00	\$6,340.00
425 x 22.5	Used Truck*	22.5 x 11.75 x 8	88"	24,000	\$8,412.00	\$7,376.00	\$6,340.00
425 x 22.5	New Truck	22.5 x 11.75 x 8	88"	24,000	\$11,772.00	\$7,376.00	\$6,340.00

Options	Price
Optional Reach Lengths: 9', 12', 14', 16', 18', 20', 22'	
Add or subtract price per foot for over or under 11' (includes both reach poles)	\$36.00
Narrow track (Custom Build) down to 60" (stake posts may ship loose)	\$552.00
Wide track (Custom Build) up to 90"	\$587.00
Wide track (Custom Build) over 90"	\$1,110.00
2 wheel free backing surge brakes c/w Double spring tongue balancer (includes brake tongue)	\$2,761.00
Single spring tongue balancer	\$115.00
Double spring tongue balancer	\$190.00
4" bolt on riser kit (other heights available)	\$552.00

*Used tires may not meet local regulations, check with your local authority before purchasing.

MODEL 285RF

HD SUSPENSION WAGON

FEATURES

- 15 ton (30,000 lbs.)
- Heavy duty wagon
- Road Flex Suspension
- Quick hitch tongue
- Standard reach length 10'
- Wheelbase adjustable 10' 7" - 12' 1"
- Hubs - 8 Stud
- Disc brake flanges
- Safety chain (1/2" Gr. 70)



Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
16.5 x 16.1	14 Ply	16.1 x W14C x 8	93"	25,600	\$12,874.00	\$9,790.00	\$8,754.00
11 x 22.5	Used Truck*	22.5 x 8.25 x 8 HD	89"	30,000	\$10,046.00	\$9,618.00	\$8,754.00
12 or 315 x 22.5	Used Truck*	22.5 x 8.25 x 8 HD	89"	30,000	\$10,390.00	\$9,618.00	\$8,754.00
305 x 22.5	Used Truck*	22.5 x 8.25 x 8 HD	89"	30,000	\$10,286.00	\$9,618.00	\$8,754.00
385 x 22.5	Used Truck*	22.5 x 11.75 x 8	89"	30,000	\$10,562.00	\$9,790.00	\$8,754.00
385 x 22.5	New Truck	22.5 x 11.75 x 8	89"	30,000	\$14,058.00	\$9,790.00	\$8,754.00
425 x 22.5	Used Truck*	22.5 x 13 x 8	86"	30,000	\$11,010.00	\$9,974.00	\$8,754.00
425 x 22.5	New Truck	22.5 x 13 x 8	86"	30,000	\$14,370.00	\$9,974.00	\$8,754.00
445 x 22.5	New Truck	22.5 x 13 x 8	86"	30,000	\$14,738.00	\$9,974.00	\$8,754.00
400 / 55 x 22.5	16 Ply	22.5 x 13 x 8	86"	30,000	\$16,414.00	\$9,974.00	\$8,754.00
560 / 45 x 22.5	16 Ply	22.5 x 16 x 8	92"	30,000	\$18,786.00	\$11,598.00	\$8,754.00

Options	Price
Optional Reach Lengths: 8', 12', 14', 16', 18', 20'	
Add or subtract price per foot for over or under 10' (includes both reach poles)	\$69.00
Narrow track (Custom Build) down to 60" (stake posts may ship loose)	\$708.00
Wide Track (Custom Build) up to 90"	\$742.00
Wide Track (Custom Build) over 90"	\$1,173.00
2 Wheel HD hydraulic disc brakes c/w flat face brake line coupler, must use 22.5 rim	\$3,312.00
4 Wheel HD hydraulic disc brakes c/w flat face brake line coupler, must use 22.5 rim	\$6,107.00
Pioneer male coupler on brake line, in lieu of flat face brake coupler	\$0.00
Single spring tongue balancer	\$115.00
Double spring tongue balancer	\$190.00
4" bolt on riser kit (other heights available)	\$616.00

*Used tires may not meet local regulations, check with your local authority before purchasing.

MODEL 365RF

HD SUSPENSION WAGON

FEATURES

- 20 ton (40,000 lbs.)
- Heavy duty wagon
- Road Flex Suspension
- Quick hitch tongue
- Standard reach length 10'
- Wheelbase adjustable 10' 7" - 12' 1"
- Hubs - 8 Stud
- Disc brake flanges
- Safety chain (1/2" Gr. 70)



Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
16.5 x 16.1	14 Ply	16.1 x W14C x 8	89"	25,600	\$14,834.00	\$11,750.00	\$10,714.00
19L x 16.1	12 Ply	16.1 x W16C x 8	91"	24,000	\$15,606.00	\$11,878.00	\$10,714.00
21.5 x 16.1	14 Ply	16.1 x W16C x 8	91"	31,400	\$16,950.00	\$11,878.00	\$10,714.00
425 x 22.5	Used Truck*	22.5 x 13 x 8	86"	40,000	\$12,970.00	\$11,934.00	\$10,714.00
425 x 22.5	New Truck	22.5 x 13 x 8	86"	40,000	\$16,330.00	\$11,934.00	\$10,714.00
445 x 22.5	New Truck	22.5 x 13 x 8	86"	40,000	\$16,698.00	\$11,934.00	\$10,714.00
400 / 55 x 22.5	16 Ply	22.5 x 13 x 8	86"	31,250	\$18,374.00	\$11,934.00	\$10,714.00
560 / 45 x 22.5	16 Ply	22.5 x 16 x 8	92"	38,550	\$20,746.00	\$13,558.00	\$10,714.00

Options	Price
Optional Reach Lengths: 8', 12', 14', 16', 18', 20', 22', 24'	
Add or subtract price per foot for over or under 10' (includes both reach poles)	\$69.00
Narrow track (Custom Build) down to 60" (stake posts may ship loose)	\$708.00
Wide Track (Custom Build) up to 90"	\$742.00
Wide Track (Custom Build) over 90"	\$1,173.00
2 Wheel HD hydraulic disc brakes c/w flat face brake line coupler, must use 22.5 rim	\$3,312.00
4 Wheel HD hydraulic disc brakes c/w flat face brake line coupler, must use 22.5 rim	\$6,107.00
Pioneer male coupler on brake line, in lieu of flat face brake coupler	\$0.00
Single spring tongue balancer	\$115.00
Double spring tongue balancer	\$190.00
4" bolt on riser kit (other heights available)	\$616.00

*Used tires may not meet local regulations, check with your local authority before purchasing.

MODEL 485RF

HD SUSPENSION WAGON

FEATURES

- 24 ton (48,000 lbs.)
- Heavy duty wagon
- Road Flex Suspension
- Quick hitch tongue
- Standard reach length 10'
- Wheelbase adjustable 10' 7" - 12' 1"
- Hubs - 10 Stud
- Disc brake flanges
- Safety chain (5/8" Gr. 70)



Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
425 x 22.5	Used Truck*	22.5 x 13 x 10	86"	48,000	\$15,643.00	\$14,607.00	\$13,319.00
425 x 22.5	New Truck	22.5 x 13 x 10	86"	48,000	\$19,003.00	\$14,607.00	\$13,319.00
445 x 22.5	New Truck	22.5 x 13 x 10	86"	48,000	\$19,371.00	\$14,607.00	\$13,319.00
400 / 55 x 22.5	16 Ply	22.5 x 13 x 10	86"	31,250	\$21,047.00	\$14,607.00	\$13,319.00
560 / 45 x 22.5	16 Ply	22.5 x 16 x 10	92"	38,550	\$23,419.00	\$16,231.00	\$13,319.00

Options	Price
Optional Reach Lengths: 8', 12', 14', 16', 18', 20', 22', 24'	
Add or subtract price per foot for over or under 10' (includes both reach poles)	\$69.00
Narrow track (Custom Build) down to 60" (stake posts may ship loose)	\$708.00
Wide Track (Custom Build) up to 90"	\$742.00
Wide Track (Custom Build) over 90"	\$1,173.00
2 Wheel HD hydraulic disc brakes c/w flat face brake line coupler	\$3,312.00
4 Wheel HD hydraulic disc brakes c/w flat face brake line coupler	\$6,107.00
Pioneer male coupler on brake line, in lieu of flat face brake coupler	\$0.00
Double spring tongue balancer	\$190.00
4" bolt on riser kit (other heights available)	\$616.00

*Used tires may not meet local regulations, check with your local authority before purchasing.

MODEL 325RF

SUSPENSION WAGON



FEATURES

- 18 ton (36,000 lbs.)
- Tandem wagon gear
- Road Flex Suspension
- Quick hitch tongue
- Standard reach length 11'
- Wheelbase adjustable 8' 8" - 11' 2"
- Hubs - 8 Stud
- Safety chain (1/2" Gr. 70)



Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
14L x 16.1	12 Ply	16.1 x W11C x 8	89"	28,050	\$14,130.00	\$10,332.00	\$9,312.00
16.5 x 16.1	14 Ply	16.1 x W14C x 8	89"	36,000	\$15,492.00	\$10,866.00	\$9,312.00
19L x 16.1	12 Ply	16.1 x W16C x 8	91"	36,000	\$16,650.00	\$11,058.00	\$9,312.00
21.5 x 16.1	14 Ply	16.1 x W16C x 8	91"	36,000	\$18,666.00	\$11,058.00	\$9,312.00
11 x 22.5	Used Truck*	22.5 x 8.25 x 8 HD	89"	36,000	\$11,250.00	\$10,608.00	\$9,312.00
12 or 315 x 22.5	Used Truck*	22.5 x 8.25 x 8 HD	89"	36,000	\$11,766.00	\$10,608.00	\$9,312.00
305 x 22.5	Used Truck*	22.5 x 8.25 x 8 HD	89"	36,000	\$11,610.00	\$10,608.00	\$9,312.00
385 x 22.5	Used Truck*	22.5 x 11.75 x 8	89"	36,000	\$12,024.00	\$10,866.00	\$9,312.00
385 x 22.5	New Truck	22.5 x 11.75 x 8	89"	36,000	\$17,268.00	\$10,866.00	\$9,312.00
425 x 22.5	Used Truck*	22.5 x 11.75 x 8	89"	36,000	\$12,420.00	\$10,866.00	\$9,312.00
425 x 22.5	New Truck	22.5 x 11.75 x 8	89"	36,000	\$17,460.00	\$10,866.00	\$9,312.00
425 x 22.5	Used Truck*	22.5 x 13 x 8	86"	36,000	\$12,696.00	\$11,142.00	\$9,312.00
425 x 22.5	New Truck	22.5 x 13 x 8	86"	36,000	\$17,736.00	\$11,142.00	\$9,312.00
445 x 22.5	New Truck	22.5 x 13 x 8	86"	36,000	\$18,288.00	\$11,142.00	\$9,312.00
400/55 22.5	16 Ply	22.5 x 13 x 8	86"	36,000	\$20,802.00	\$11,142.00	\$9,312.00

Options	Price
Optional Reach Lengths: 9', 12', 14', 16', 18', 20', 22', 24'	
Add or subtract price per foot for over or under 11' (includes both reach poles)	\$36.00
Narrow track (Custom Build) down to 60" (stake posts may ship loose)	\$708.00
Wide Track (Custom Build) up to 90"	\$587.00
2 Wheel HD hydraulic disc brakes c/w flat face brake line coupler, must use 22.5 rim	\$3,312.00
4 Wheel HD hydraulic disc brakes c/w flat face brake line coupler, must use 22.5 rim	\$6,107.00
Pioneer male coupler on brake line, in lieu of flat face brake coupler	\$0.00
Single spring tongue balancer	\$115.00
Double spring tongue balancer	\$190.00
4" bolt on riser kit (other heights available)	\$616.00

*Used tires may not meet local regulations, check with your local authority before purchasing.

MODEL 505RF

SUSPENSION WAGON

FEATURES

- 22 ton (44,000 lbs.)
- HD tandem wagon gear
- Road Flex Suspension
- Quick hitch tongue
- Standard reach length 10'
- Wheelbase adjustable 10' 7" - 12' 1"
- Hubs - 8 Stud
- Disc brake flanges
- Safety chain (1/2" Gr. 70)



Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
16.5 x 16.1	14 Ply	16.1 x W14C x 8	89"	38,400	\$19,345.00	\$14,719.00	\$13,165.00
19L x 16.1	12 Ply	16.1 x W16C x 8	91"	36,000	\$20,503.00	\$14,911.00	\$13,165.00
21.5 x 16.1	14 Ply	16.1 x W16C x 8	91"	44,000	\$22,519.00	\$14,911.00	\$13,165.00
425 x 22.5	Used Truck*	22.5 x 13 x 8	86"	44,000	\$16,549.00	\$14,995.00	\$13,165.00
425 x 22.5	New Truck	22.5 x 13 x 8	86"	44,000	\$21,589.00	\$14,995.00	\$13,165.00
445 x 22.5	New Truck	22.5 x 13 x 8	86"	44,000	\$22,141.00	\$14,995.00	\$13,165.00
400 / 55 x 22.5	16 Ply	22.5 x 13 x 8	86"	44,000	\$24,655.00	\$14,995.00	\$13,165.00
560 / 45 x 22.5	16 Ply	22.5 x 16 x 8	92"	44,000	\$28,213.00	\$17,431.00	\$13,165.00

Options	Price
Optional Reach Lengths: 8', 12', 14', 16', 18', 20', 22', 24', 26'	
Add or subtract price per foot for over or under 10' (includes both reach poles)	\$69.00
Narrow track (Custom Build) down to 60" (stake posts may ship loose)	\$708.00
2 Wheel HD hydraulic disc brakes c/w flat face brake line coupler, must use 22.5 rim	\$3,312.00
4 Wheel HD hydraulic disc brakes c/w flat face brake line coupler, must use 22.5 rim	\$6,107.00
Pioneer male coupler on brake line, in lieu of flat face brake coupler	\$0.00
Single spring tongue balancer	\$115.00
Double spring tongue balancer	\$190.00
4" bolt on riser kit (other heights available)	\$616.00

*Used tires may not meet local regulations, check with your local authority before purchasing.

MODEL 308RF

SUSPENSION WAGON



FEATURES

- 20 ton (40,000 lbs.)
- Double tandem wagon gear
- Front Tandem has quad steering c/w bearings on king pins
- Road Flex Suspension
- Quick hitch tongue
- Standard reach length 11'
- Hubs - 8 Stud
- Safety chain (1/2" Gr. 70)
- Wheelbase adjustable 13' 5" - 15' 11"
(taken from the centre of the rear tandem axle to the front axle of front tandem.)



Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
14L x 16.1	12 Ply	16.1 x W11C x 8	89"	37,400	\$21,377.00	\$16,313.00	\$14,953.00
16.5 x 16.1	14 Ply	16.1 x W14C x 8	89"	40,000	\$23,193.00	\$17,025.00	\$14,953.00
19L x 16.1	12 Ply	16.1 x W16C x 8	91"	40,000	\$24,737.00	\$17,281.00	\$14,953.00
21.5 x 16.1	14 Ply	16.1 x W16C x 8	91"	40,000	\$27,425.00	\$17,281.00	\$14,953.00
11 x 22.5	Used Truck*	22.5 x 8.25 x 8 HD	89"	40,000	\$17,537.00	\$16,681.00	\$14,953.00
12 or 315 x 22.5	Used Truck*	22.5 x 8.25 x 8 HD	89"	40,000	\$18,225.00	\$16,681.00	\$14,953.00
305 x 22.5	Used Truck*	22.5 x 8.25 x 8 HD	89"	40,000	\$18,017.00	\$16,681.00	\$14,953.00
385 x 22.5	Used Truck*	22.5 x 11.75 x 8	89"	40,000	\$18,569.00	\$17,025.00	\$14,953.00
385 x 22.5	New Truck	22.5 x 11.75 x 8	89"	40,000	\$25,561.00	\$17,025.00	\$14,953.00
425 x 22.5	Used Truck*	22.5 x 11.75 x 8	89"	40,000	\$19,097.00	\$17,025.00	\$14,953.00
425 x 22.5	New Truck	22.5 x 11.75 x 8	89"	40,000	\$25,817.00	\$17,025.00	\$14,953.00
425 x 22.5	Used Truck*	22.5 x 13 x 8	86"	40,000	\$19,465.00	\$17,393.00	\$14,953.00
425 x 22.5	New Truck	22.5 x 13 x 8	86"	40,000	\$26,185.00	\$17,393.00	\$14,953.00
445 x 22.5	New Truck	22.5 x 13 x 8	86"	40,000	\$26,921.00	\$17,393.00	\$14,953.00
400 / 55 x 22.5	16 Ply	22.5 x 13 x 8	86"	40,000	\$30,273.00	\$17,393.00	\$14,953.00

Options	Price
Optional Reach Lengths: 9', 12', 14', 16', 18', 20', 22'	
Add or subtract price per foot for over or under 11' (includes both reach poles)	\$36.00
2 Wheel HD hydraulic disc brakes c/w flat face brake line coupler, must use 22.5 rim	\$3,312.00
4 Wheel HD hydraulic disc brakes c/w flat face brake line coupler, must use 22.5 rim	\$6,107.00
Pioneer male coupler on brake line, in lieu of flat face brake coupler	\$0.00
Single spring tongue balancer	\$115.00
Double spring tongue balancer	\$190.00
4" bolt on riser kit (other heights available)	\$708.00

*Used tires may not meet local regulations, check with your local authority before purchasing.

4 WHEEL

MODELS

LEADERS IN FOLLOWING

Our industry leading No-Sway trailing ensures that our wagons follow your lead. Tapered roller bearings on the king pins and automotive style ball joints not only keep our wagons behind you they also provide years of hard working service. From field to farm Horst Wagons are built to get you there.

NOTE: The rated capacities provided are for the chassis only and rims and tires should be matched accordingly when ordered.



STANDARD FEATURES



RETRACTABLE AUTOMATIC RELOCK TONGUE LATCH
(with standard variable adjustment)

Take the precision work out of hooking up by freely moving the tongue into place and watch it lock into place as soon as it's in motion.



TAPERED ROLLER BEARINGS IN MAIN PIVOT POINTS

Roller bearings keep pivot points tight, ensuring no trailer sway and long-lasting use.



AUTOMOTIVE BALL JOINTS

Automotive style ball joints not only keep our wagons behind you, they also provide years of hard working service.



SAFETY CHAINS

Grade 70 safety chains to help provide safe towing

MODEL 145

FEATURES

- 8 ton (16,000 lbs.)
- Quick hitch tongue
- Standard reach length 6' 7"
- Wheelbase adjustable 7'-11'
- Hubs - 6 Bolt
- Safety chain (3/8" Gr. 70)



Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
11L x 15	8 Ply	15 x 8 x 6 HD	74"	10,150	\$3,427.00	\$2,367.00	\$1,939.00
225/75 R15	D Range	15 x 6 x 6	74"	10,150	\$3,403.00	\$2,287.00	\$1,939.00
12.5L x 15	12 Ply	15 x 10 x 6 HD	76"	14,550	\$3,895.00	\$2,423.00	\$1,939.00
245 R16	Used Truck*	16 x 8 x 6	74"	14,000	\$2,747.00	\$2,307.00	\$1,939.00
11L x 15	D Range / Hwy Ser.	15 x 8 x 6 HD	74"	12,450	\$4,151.00	\$2,367.00	\$1,939.00
11L x 15	F Range / Hwy Ser.	15 x 8 x 6 HD	74"	15,800	\$4,279.00	\$2,367.00	\$1,939.00
26 x 12	12 Ply	12 x 10.5 x 6	80"	11,000	\$3,527.00	N/A	\$1,939.00

Options	Price
Optional 10' reach length (wheelbase adj. 11' to 14')	\$67.00
High clearance option (6" increase - refer to specification page 52)	\$575.00
Narrow track (Custom Build) down to 60" (stake posts may ship loose)	\$552.00
Wide track (Custom Build) up to 90"	\$587.00
Single spring tongue balancer	\$115.00
4" bolt on riser kit (other heights available)	\$552.00

*Used tires may not meet local regulations, check with your local authority before purchasing.

MODEL 185

FEATURES

- 10 ton (20,000 lbs.)
- Quick hitch tongue
- Standard reach length 11'
- Wheelbase adjustable 8' 8" - 11' 2"
- Hubs - 6 Bolt
- Safety chain (3/8" Gr. 70)



Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
11L x 15	8 Ply	15 x 8 x 6 HD	76"	10,150	\$3,993.00	\$2,933.00	\$2,505.00
225/75 R15	D Range	15 x 6 x 6	76"	10,150	\$3,969.00	\$2,853.00	\$2,505.00
12.5L x 15	12 Ply	15 x 10 x 6 HD	78"	14,550	\$4,461.00	\$2,989.00	\$2,505.00
245 R16	Used Truck*	16 x 8 x 6	76"	14,000	\$3,313.00	\$2,873.00	\$2,505.00
11L x 15	D Range / Hwy Ser.	15 x 8 x 6 HD	76"	12,450	\$4,717.00	\$2,933.00	\$2,505.00
11L x 15	F Range / Hwy Ser.	15 x 8 x 6 HD	76"	15,800	\$4,845.00	\$2,933.00	\$2,505.00

Options	Price
Optional Reach Lengths: 9', 12', 14', 16', 18', 20', 22'	
Add or subtract price per foot for over or under 11' (includes both reach poles)	\$36.00
High clearance option (6" increase - refer to specification page 52)	\$575.00
Narrow track (Custom Build) down to 60" (stake posts may ship loose)	\$552.00
Wide track (Custom Build) up to 90"	\$587.00
Wide track (Custom Build) over 90"	\$1,110.00
Single spring tongue balancer	\$115.00
Double spring tongue balancer	\$190.00
Rocking bolster	\$667.00
Rocking bolster for ammonia tank	\$667.00
4" bolt on riser kit (other heights available)	\$552.00

*Used tires may not meet local regulations, check with your local authority before purchasing.

MODEL 185F

FEATURES

- 6 ton (12,000 lbs.)
- Four Wheel Steer
- Quick hitch tongue
- Standard reach length 11'
- Wheelbase fixed 11' 2"
- Hubs - 6 Bolt
- Safety chain (3/8" Gr. 70)



Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
11L x 15	8 Ply	15 x 8 x 6 HD	72"	10,150	\$5,315.00	\$4,255.00	\$3,827.00
225/75 R15	D Range	15 x 6 x 6	72"	10,150	\$5,291.00	\$4,175.00	\$3,827.00
12.5L x 15	12 Ply	15 x 10 x 6 HD	74"	12,000	\$5,783.00	\$4,311.00	\$3,827.00
245 R16	Used Truck*	16 x 8 x 6	72"	12,000	\$4,635.00	\$4,195.00	\$3,827.00
11L x 15	F Range / Hwy Ser.	15 x 8 x 6 HD	72"	12,000	\$6,167.00	\$4,255.00	\$3,827.00

Options	Price
Optional Reach Lengths: 9', 12', 14', 16', 18', 20', 22'	
Add or subtract price per foot for over or under 11' (includes both reach poles)	\$36.00
High clearance option (6" increase - refer to specification page 52)	\$575.00
Narrow track (Custom Build) down to 60" (stake posts may ship loose)	\$552.00
Wide track (Custom Build) up to 90"	\$587.00
Wide track (Custom Build) over 90"	\$1,110.00
Single spring tongue balancer	\$115.00
Double spring tongue balancer	\$190.00
Rocking bolster	\$667.00
Rocking bolster for ammonia tank	\$667.00
4" bolt on riser kit (other heights available)	\$552.00

*Used tires may not meet local regulations, check with your local authority before purchasing.

MODEL 205

FEATURES

- 12 ton (24,000 lbs.)
- Quick hitch tongue
- Standard reach length 11'
- Wheelbase adjustable 8' 8" - 11' 2"
- Hubs - 8 Bolt
- Safety chain (3/8" Gr. 70)



Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
12.5L x 16	14 Ply	16 x 10 x 8	82"	16,700	\$5,474.00	\$3,666.00	\$3,010.00
12.5L x 15	F Range / Hwy Ser.	15 x 10 x 8 HD	82"	14,550	\$5,682.00	\$3,506.00	\$3,010.00
16.5 x 16.1	14 Ply	16.1 x W14C x 8	86"	24,000	\$7,130.00	\$4,046.00	\$3,010.00
11 x 22.5	Used Truck*	22.5 x 8.25 x 8 HD	82"	24,000	\$4,302.00	\$3,874.00	\$3,010.00
12 or 315 x 22.5	Used Truck*	22.5 x 8.25 x 8 HD	82"	24,000	\$4,646.00	\$3,874.00	\$3,010.00
305 x 22.5	Used Truck*	22.5 x 8.25 x 8 HD	82"	24,000	\$4,542.00	\$3,874.00	\$3,010.00
385 x 22.5	Used Truck*	22.5 x 11.75 x 8	88"	24,000	\$4,818.00	\$4,046.00	\$3,010.00
385 x 22.5	New Truck	22.5 x 11.75 x 8	88"	24,000	\$8,314.00	\$4,046.00	\$3,010.00
425 x 22.5	Used Truck*	22.5 x 11.75 x 8	88"	24,000	\$5,082.00	\$4,046.00	\$3,010.00
425 x 22.5	New Truck	22.5 x 11.75 x 8	88"	24,000	\$8,442.00	\$4,046.00	\$3,010.00

Options	Price
Optional Reach Lengths: 9', 12', 14', 16', 18', 20', 22'	
Add or subtract price per foot for over or under 11' (includes both reach poles)	\$36.00
Narrow track (Custom Build) down to 60" (stake posts may ship loose)	\$552.00
Wide track (Custom Build) up to 90"	\$587.00
Wide track (Custom Build) over 90"	\$1,110.00
2 wheel free backing surge brakes c/w Double spring tongue balancer (includes brake tongue)	\$2,761.00
Single spring tongue balancer	\$115.00
Double spring tongue balancer	\$190.00
Rocking bolster	\$667.00
Rocking bolster for ammonia tank	\$667.00
4" bolt on riser kit (other heights available)	\$552.00

*Used tires may not meet local regulations, check with your local authority before purchasing.

MODEL 275

FEATURES

- 14 ton (28,000 lbs.)
- Quick hitch tongue
- Standard reach length 11'
- Wheelbase adjustable 8' 8" - 11' 2"
- Hubs - 8 Stud
- Safety chain (1/2" Gr. 70)



Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
14L x 16.1	12 Ply	16.1 x W11C x 8	89"	18,700	\$7,039.00	\$4,507.00	\$3,827.00
16.5 x 16.1	14 Ply	16.1 x W14C x 8	89"	25,600	\$7,947.00	\$4,863.00	\$3,827.00
11 x 22.5	Used Truck*	22.5 x 8.25 x 8 HD	89"	28,000	\$5,119.00	\$4,691.00	\$3,827.00
12 or 315 x 22.5	Used Truck*	22.5 x 8.25 x 8 HD	89"	28,000	\$5,463.00	\$4,691.00	\$3,827.00
305 x 22.5	Used Truck*	22.5 x 8.25 x 8 HD	89"	28,000	\$5,359.00	\$4,691.00	\$3,827.00
385 x 22.5	Used Truck*	22.5 x 11.75 x 8	89"	28,000	\$5,635.00	\$4,863.00	\$3,827.00
385 x 22.5	New Truck	22.5 x 11.75 x 8	89"	28,000	\$9,131.00	\$4,863.00	\$3,827.00
425 x 22.5	Used Truck*	22.5 x 11.75 x 8	89"	28,000	\$5,899.00	\$4,863.00	\$3,827.00
425 x 22.5	New Truck	22.5 x 11.75 x 8	89"	28,000	\$9,259.00	\$4,863.00	\$3,827.00
425 x 22.5	Used Truck*	22.5 x 13 x 8	86"	28,000	\$6,083.00	\$5,047.00	\$3,827.00
425 x 22.5	New Truck	22.5 x 13 x 8	86"	28,000	\$9,443.00	\$5,047.00	\$3,827.00
445 x 22.5	New Truck	22.5 x 13 x 8	86"	28,000	\$9,811.00	\$5,047.00	\$3,827.00
400 / 55 x 22.5	16 Ply	22.5 x 13 x 8	86"	28,000	\$11,487.00	\$5,047.00	\$3,827.00

Options	Price
Optional Reach Lengths: 9', 12', 14', 16', 18', 20', 22'	
Add or subtract price per foot for over or under 11' (includes both reach poles)	\$36.00
Narrow track (Custom Build) down to 60" (stake posts may ship loose)	\$552.00
Wide Track (Custom Build) up to 90"	\$587.00
Wide Track (Custom Build) over 90"	\$1,110.00
2 wheel free backing surge brakes c/w Double spring tongue balancer (includes brake tongue)	\$2,761.00
2 Wheel HD hydraulic disc brakes c/w flat face brake line coupler, must use 22.5 rim	\$3,312.00
Pioneer male coupler on brake line, in lieu of flat face brake coupler	\$0.00
Disc brake flanges (for future brake add on)	\$271.00
Single spring tongue balancer	\$115.00
Double spring tongue balancer	\$190.00
Rocking bolster	\$667.00
4" bolt on riser kit (other heights available)	\$616.00

*Used tires may not meet local regulations, check with your local authority before purchasing.

MODEL 285

HEAVY DUTY WAGON

FEATURES

- 15 ton (30,000 lbs.)
- HD wagon gear
- Quick hitch tongue
- Rocking bolster
- Standard reach length 10'
- Wheelbase adjustable 10' 7" - 12' 1"
- Hubs - 8 Stud
- Disc brake flanges
- Safety chain (1/2" Gr. 70)



Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
16.5 x 16.1	14 Ply	16.1 x W14C x 8	93"	25,600	\$8,826.00	\$5,742.00	\$4,706.00
11 x 22.5	Used Truck*	22.5 x 8.25 x 8 HD	89"	30,000	\$5,998.00	\$5,570.00	\$4,706.00
12 or 315 x 22.5	Used Truck*	22.5 x 8.25 x 8 HD	89"	30,000	\$6,342.00	\$5,570.00	\$4,706.00
305 x 22.5	Used Truck*	22.5 x 8.25 x 8 HD	89"	30,000	\$6,238.00	\$5,570.00	\$4,706.00
385 x 22.5	Used Truck*	22.5 x 11.75 x 8	89"	30,000	\$6,514.00	\$5,742.00	\$4,706.00
385 x 22.5	New Truck	22.5 x 11.75 x 8	89"	30,000	\$10,010.00	\$5,742.00	\$4,706.00
425 x 22.5	Used Truck*	22.5 x 13 x 8	86"	30,000	\$6,962.00	\$5,926.00	\$4,706.00
425 x 22.5	New Truck	22.5 x 13 x 8	86"	30,000	\$10,322.00	\$5,926.00	\$4,706.00
445 x 22.5	New Truck	22.5 x 13 x 8	86"	30,000	\$10,690.00	\$5,926.00	\$4,706.00
400 / 55 x 22.5	16 Ply	22.5 x 13 x 8	86"	30,000	\$12,366.00	\$5,926.00	\$4,706.00
560 / 45 x 22.5	16 Ply	22.5 x 16 x 8	92"	30,000	\$14,738.00	\$7,550.00	\$4,706.00

Options	Price
Optional Reach Lengths: 8', 12', 14', 16', 18', 20'	
Add or subtract price per foot for over or under 10' (includes both reach poles)	\$69.00
Narrow track (Custom Build) down to 60" (stake posts may ship loose)	\$708.00
Wide Track (Custom Build) up to 90"	\$742.00
Wide Track (Custom Build) over 90"	\$1,173.00
2 Wheel HD hydraulic disc brakes c/w flat face brake line coupler, must use 22.5 rim	\$3,312.00
Pioneer male coupler on brake line, in lieu of flat face brake coupler	\$0.00
Single spring tongue balancer	\$115.00
Double spring tongue balancer	\$190.00
4" bolt on riser kit (other heights available)	\$616.00

*Used tires may not meet local regulations, check with your local authority before purchasing.

MODEL 365E

ECONOMY WAGON

FEATURES

- 20 ton (40,000 lbs.)
- HD wagon gear
- Quick hitch tongue
- Standard reach length 10'
- Wheelbase adjustable 10' 7" - 12' 1"
- Hubs - 8 Stud
- Disc brake flanges
- Safety chain (1/2" Gr. 70)



Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
16.5 x 16.1	14 Ply	16.1 x W14C x 8	89"	25,600	\$9,263.00	\$6,179.00	\$5,143.00
19L x 16.1	12 Ply	16.1 x W16C x 8	91"	24,000	\$10,035.00	\$6,307.00	\$5,143.00
21.5 x 16.1	14 Ply	16.1 x W16C x 8	91"	31,400	\$11,379.00	\$6,307.00	\$5,143.00
425 x 22.5	Used Truck*	22.5 x 13 x 8	86"	40,000	\$7,399.00	\$6,363.00	\$5,143.00
425 x 22.5	New Truck	22.5 x 13 x 8	86"	40,000	\$10,759.00	\$6,363.00	\$5,143.00
445 x 22.5	New Truck	22.5 x 13 x 8	86"	40,000	\$11,127.00	\$6,363.00	\$5,143.00
400 / 55 x 22.5	16 Ply	22.5 x 13 x 8	86"	31,250	\$12,803.00	\$6,363.00	\$5,143.00
560 / 45 x 22.5	16 Ply	22.5 x 16 x 8	92"	38,550	\$15,175.00	\$7,987.00	\$5,143.00

Options	Price
Optional Reach Lengths: 8', 12', 14', 16', 18', 20', 22', 24'	
Add or subtract price per foot for over or under 10' (includes both reach poles)	\$69.00
Narrow track (Custom Build) down to 60" (stake posts may ship loose)	\$708.00
Wide Track (Custom Build) up to 90"	\$742.00
Wide Track (Custom Build) over 90"	\$1,173.00
2 Wheel HD hydraulic disc brakes c/w flat face brake line coupler, must use 22.5 rim	\$3,312.00
Pioneer male coupler on brake line, in lieu of flat face brake coupler	\$0.00
Single spring tongue balancer	\$115.00
Double spring tongue balancer	\$190.00
4" bolt on riser kit (other heights available)	\$616.00

*Used tires may not meet local regulations, check with your local authority before purchasing.

MODEL 365

HEAVY DUTY WAGON

FEATURES

- 20 ton (40,000 lbs.)
- HD wagon gear
- Quick hitch tongue
- Rocking bolster
- Standard reach length 10'
- Wheelbase adjustable 10' 7" - 12' 1"
- Hubs - 8 Stud
- Disc brake flanges
- Safety chain (1/2" Gr. 70)



Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
16.5 x 16.1	14 Ply	16.1 x W14C x 8	89"	25,600	\$9,775.00	\$6,691.00	\$5,655.00
19L x 16.1	12 Ply	16.1 x W16C x 8	91"	24,000	\$10,547.00	\$6,819.00	\$5,655.00
21.5 x 16.1	14 Ply	16.1 x W16C x 8	91"	31,400	\$11,891.00	\$6,819.00	\$5,655.00
425 x 22.5	Used Truck*	22.5 x 13 x 8	86"	40,000	\$7,911.00	\$6,875.00	\$5,655.00
425 x 22.5	New Truck	22.5 x 13 x 8	86"	40,000	\$11,271.00	\$6,875.00	\$5,655.00
445 x 22.5	New Truck	22.5 x 13 x 8	86"	40,000	\$11,639.00	\$6,875.00	\$5,655.00
400 / 55 x 22.5	16 Ply	22.5 x 13 x 8	86"	31,250	\$13,315.00	\$6,875.00	\$5,655.00
560 / 45 x 22.5	16 Ply	22.5 x 16 x 8	92"	38,550	\$15,687.00	\$8,499.00	\$5,655.00

Options	Price
Optional Reach Lengths: 8', 12', 14', 16', 18', 20', 22', 24'	
Add or subtract price per foot for over or under 10' (includes both reach poles)	\$69.00
Narrow track (Custom Build) down to 60" (stake posts may ship loose)	\$708.00
Wide Track (Custom Build) up to 90"	\$742.00
Wide Track (Custom Build) over 90"	\$1,173.00
2 Wheel HD hydraulic disc brakes c/w flat face brake line coupler, must use 22.5 rim	\$3,312.00
Pioneer male coupler on brake line, in lieu of flat face brake coupler	\$0.00
Single spring tongue balancer	\$115.00
Double spring tongue balancer	\$190.00
4" bolt on riser kit (other heights available)	\$616.00

*Used tires may not meet local regulations, check with your local authority before purchasing.

MODEL 485

HEAVY DUTY WAGON

FEATURES

- 24 ton (48,000 lbs.)
- HD wagon gear
- Quick hitch tongue
- Rocking bolster
- Standard reach length 10'
- Wheelbase adjustable 10' 7" - 12' 1"
- Hubs - 10 Stud
- Disc brake flanges
- Safety chain (5/8" Gr. 70)



Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
425 x 22.5	Used Truck*	22.5 x 13 x 10	86"	48,000	\$10,509.00	\$9,473.00	\$8,185.00
425 x 22.5	New Truck	22.5 x 13 x 10	86"	48,000	\$13,869.00	\$9,473.00	\$8,185.00
445 x 22.5	New Truck	22.5 x 13 x 10	86"	48,000	\$14,237.00	\$9,473.00	\$8,185.00
400 / 55 x 22.5	16 Ply	22.5 x 13 x 10	86"	31,250	\$15,913.00	\$9,473.00	\$8,185.00
560 / 45 x 22.5	16 Ply	22.5 x 16 x 10	92"	38,550	\$18,285.00	\$11,097.00	\$8,185.00

Options	Price
Optional Reach Lengths: 8', 12', 14', 16', 18', 20', 22', 24'	
Add or subtract price per foot for over or under 10' (includes both reach poles)	\$69.00
Narrow track (Custom Build) down to 60" (stake posts may ship loose)	\$708.00
Wide Track (Custom Build) up to 90"	\$742.00
Wide Track (Custom Build) over 90"	\$1,173.00
2 Wheel HD hydraulic disc brakes c/w flat face brake line coupler	\$3,312.00
Pioneer male coupler on brake line, in lieu of flat face brake coupler	\$0.00
Double spring tongue balancer	\$190.00
4" bolt on riser kit (other heights available)	\$616.00

*Used tires may not meet local regulations, check with your local authority before purchasing.

6 WHEEL

MODELS

LEADERS ROLL WITH THE UPS AND DOWNS

Our 6 Wheel models feature rear walking beam axles to provide a more confident smoother ride. Featuring our proven double reach poles provide the strength needed to turn tandems. The 6 wheels give extra weight capacity and excellent flotation on loads from 12 to 30 tons.

NOTE: The rated capacities provided are for the chassis only and rims and tires should be matched accordingly when ordered.



STANDARD FEATURES



RETRACTABLE AUTOMATIC RELOCK TONGUE LATCH
(with standard variable adjustment)

Take the precision work out of hooking up by freely moving the tongue into place and watch it lock into place as soon as it's in motion.



TAPERED ROLLER BEARINGS IN MAIN PIVOT POINTS

Roller bearings keep pivot points tight, ensuring no trailer sway and long-lasting use.



AUTOMOTIVE BALL JOINTS

Automotive style ball joints not only keep our wagons behind you they also provide years of hard working service.



TANDEM WALKING BEAM AXLE

Ensures weight is evenly distributed on the back wheels across a variety of terrain. Triangulated for increased strength the tandem axle uses two mounts reducing flex under travel.



SAFETY CHAINS

Grade 70 safety chains to help provide safe towing

MODEL 245

FEATURES

- 12 ton (24,000 lbs)
- Tandem wagon gear
- Quick hitch tongue
- Standard reach length 11'
- Wheelbase adjustable 8' 8" - 11' 2"
- Hubs - 6 Bolt
- Safety chain (3/8" Gr. 70)



Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
11L x 15	8 Ply	15 x 8 x 6 HD	76"	15,200	\$5,744.00	\$4,154.00	\$3,512.00
225/75 R15	D Range	15 x 6 x 6	76"	15,200	\$5,708.00	\$4,034.00	\$3,512.00
12.5L x 15	12 Ply	15 x 10 x 6 HD	78"	21,800	\$6,446.00	\$4,238.00	\$3,512.00
12.5L x 16	14 Ply	16 x 10 x 6	75"	25,050	\$7,124.00	\$4,412.00	\$3,512.00
245 R16	Used Truck*	16 x 8 x 6	76"	21,000	\$4,724.00	\$4,064.00	\$3,512.00
11L x 15	D Range / Hwy Ser.	15 x 8 x 6 HD	76"	18,700	\$6,830.00	\$4,154.00	\$3,512.00
11L x 15	F Range / Hwy Ser.	15 x 8 x 6 HD	76"	23,750	\$7,022.00	\$4,154.00	\$3,512.00

Options	Price
Optional Reach Lengths: 9', 12', 14', 16', 18', 20', 22'	
Add or subtract price per foot for over or under 11' (includes both reach poles)	\$36.00
Narrow track (Custom Build) down to 60" (stake posts may ship loose)	\$552.00
Wide Track (Custom Build) up to 90"	\$587.00
Wide Track (Custom Build) over 90"	\$1,110.00
Single spring tongue balancer	\$115.00
Double spring tongue balancer	\$190.00
Rocking bolster	\$667.00
Rocking bolster for ammonia tank	\$667.00
4" bolt on riser kit (other heights available)	\$552.00

*Used tires may not meet local regulations, check with your local authority before purchasing.

MODEL 265

FEATURES

- 14 ton (28,000 lbs.)
- Tandem wagon gear
- Quick hitch tongue
- Standard reach length 11'
- Wheelbase adjustable 8' 8" - 11' 2"
- Hubs - 8 Bolt
- Safety chain (1/2" Gr. 70)



Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
12.5L x 15	12 Ply	15 x 10 x 8 HD	82"	21,800	\$6,987.00	\$4,779.00	\$4,035.00
12.5L x 16	14 Ply	16 x 10 x 8	82"	25,050	\$7,731.00	\$5,019.00	\$4,035.00
12.5L x 15	F Range / Hwy Ser.	15 x 10 x 8 HD	82"	28,050	\$8,043.00	\$4,779.00	\$4,035.00

Options	Price
Optional Reach Lengths: 9', 12', 14', 16', 18', 20', 22'	
Add or subtract price per foot for over or under 11' (includes both reach poles)	\$36.00
Narrow track (Custom Build) down to 60" (stake posts may ship loose)	\$552.00
Wide Track (Custom Build) up to 90"	\$587.00
2 wheel free backing surge brakes	\$2,761.00
4 wheel free backing surge brakes	\$3,882.00
Single spring tongue balancer	\$115.00
Double spring tongue balancer	\$190.00
Rocking bolster	\$667.00
Rocking bolster for ammonia tank	\$667.00
4" bolt on riser kit (other heights available)	\$552.00

MODEL 325

FEATURES

- 18 ton (36,000 lbs.)
- Tandem wagon gear
- Quick hitch tongue
- Standard reach length 11'
- Wheelbase adjustable 8' 8" - 11' 2"
- Hubs - 8 Stud
- Safety chain (1/2" Gr. 70)



Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
14L x 16.1	12 Ply	16.1 x W11C x 8	89"	28,050	\$11,371.00	\$7,573.00	\$6,553.00
16.5 x 16.1	14 Ply	16.1 x W14C x 8	89"	36,000	\$12,733.00	\$8,107.00	\$6,553.00
19L x 16.1	12 Ply	16.1 x W16C x 8	91"	36,000	\$13,891.00	\$8,299.00	\$6,553.00
21.5 x 16.1	14 Ply	16.1 x W16C x 8	91"	36,000	\$15,907.00	\$8,299.00	\$6,553.00
11 x 22.5	Used Truck*	22.5 x 8.25 x 8 HD	89"	36,000	\$8,491.00	\$7,849.00	\$6,553.00
12 or 315 x 22.5	Used Truck*	22.5 x 8.25 x 8 HD	89"	36,000	\$9,007.00	\$7,849.00	\$6,553.00
305 x 22.5	Used Truck*	22.5 x 8.25 x 8 HD	89"	36,000	\$8,851.00	\$7,849.00	\$6,553.00
385 x 22.5	Used Truck*	22.5 x 11.75 x 8	89"	36,000	\$9,265.00	\$8,107.00	\$6,553.00
385 x 22.5	New Truck	22.5 x 11.75 x 8	89"	36,000	\$14,509.00	\$8,107.00	\$6,553.00
425 x 22.5	Used Truck*	22.5 x 11.75 x 8	89"	36,000	\$9,661.00	\$8,107.00	\$6,553.00
425 x 22.5	New Truck	22.5 x 11.75 x 8	89"	36,000	\$14,701.00	\$8,107.00	\$6,553.00
425 x 22.5	Used Truck*	22.5 x 13 x 8	86"	36,000	\$9,937.00	\$8,383.00	\$6,553.00
425 x 22.5	New Truck	22.5 x 13 x 8	86"	36,000	\$14,977.00	\$8,383.00	\$6,553.00
445 x 22.5	New Truck	22.5 x 13 x 8	86"	36,000	\$15,529.00	\$8,383.00	\$6,553.00
400/55 22.5	16 Ply	22.5 x 13 x 8	86"	36,000	\$18,043.00	\$8,383.00	\$6,553.00

Options	Price
Optional Reach Lengths: 9', 12', 14', 16', 18', 20', 22', 24'	
Add or subtract price per foot for over or under 11' (includes both reach poles)	\$36.00
Narrow track (Custom Build) down to 60" (stake posts may ship loose)	\$708.00
Wide Track (Custom Build) up to 90"	\$587.00
2 Wheel HD hydraulic disc brakes c/w flat face brake line coupler, must use 22.5 rim	\$3,312.00
4 Wheel HD hydraulic disc brakes c/w flat face brake line coupler, must use 22.5 rim	\$6,107.00
Pioneer male coupler on brake line, in lieu of flat face brake coupler	\$0.00
Disc brake flanges for future add on (per axle)	\$271.00
Single spring tongue balancer	\$115.00
Double spring tongue balancer	\$190.00
Rocking bolster	\$667.00
4" bolt on riser kit (other heights available)	\$616.00

*Used tires may not meet local regulations, check with your local authority before purchasing.

MODEL 505

HEAVY DUTY WAGON

FEATURES

- 22 ton (44,000 lbs.)
- HD tandem wagon gear
- Quick hitch tongue
- Rocking bolster
- Standard reach length 10'
- Wheelbase adjustable 10' 7" - 12' 1"
- Hubs - 8 Stud
- Disc brake flanges
- Safety chain (1/2" Gr. 70)



Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
16.5 x 16.1	14 Ply	16.1 x W14C x 8	89"	38,400	\$15,239.00	\$10,613.00	\$9,059.00
19L x 16.1	12 Ply	16.1 x W16C x 8	91"	36,000	\$16,397.00	\$10,805.00	\$9,059.00
21.5 x 16.1	14 Ply	16.1 x W16C x 8	91"	44,000	\$18,413.00	\$10,805.00	\$9,059.00
425 x 22.5	Used Truck*	22.5 x 13 x 8	86"	44,000	\$12,443.00	\$10,889.00	\$9,059.00
425 x 22.5	New Truck	22.5 x 13 x 8	86"	44,000	\$17,483.00	\$10,889.00	\$9,059.00
445 x 22.5	New Truck	22.5 x 13 x 8	86"	44,000	\$18,035.00	\$10,889.00	\$9,059.00
400 / 55 x 22.5	16 Ply	22.5 x 13 x 8	86"	44,000	\$20,549.00	\$10,889.00	\$9,059.00
560 / 45 x 22.5	16 Ply	22.5 x 16 x 8	92"	44,000	\$24,107.00	\$13,325.00	\$9,059.00

Options	Price
Optional Reach Lengths: 8', 12', 14', 16', 18', 20', 22', 24', 26'	
Add or subtract price per foot for over or under 10' (includes both reach poles)	\$69.00
Narrow track (Custom Build) down to 60" (stake posts may ship loose)	\$708.00
2 Wheel HD hydraulic disc brakes c/w flat face brake line coupler, must use 22.5 rim	\$3,312.00
4 Wheel HD hydraulic disc brakes c/w flat face brake line coupler, must use 22.5 rim	\$6,107.00
Pioneer male coupler on brake line, in lieu of flat face brake coupler	\$0.00
Single spring tongue balancer	\$115.00
Double spring tongue balancer	\$190.00
4" bolt on riser kit (other heights available)	\$616.00

*Used tires may not meet local regulations, check with your local authority before purchasing.

MODEL 605

HEAVY DUTY WAGON

FEATURES

- 30 ton (60,000 lbs.)
- HD tandem wagon gear
- Quick hitch tongue
- Rocking bolster
- Standard reach length 10'
- Wheelbase adjustable 10' 7" - 12' 1"
- Hubs - 10 Stud
- Disc brake flanges
- Safety chain (5/8" Gr. 70)



Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
425 x 22.5	Used Truck*	22.5 x 13 x 10	86"	60,000	\$14,869.00	\$13,315.00	\$11,383.00
425 x 22.5	New Truck	22.5 x 13 x 10	86"	60,000	\$19,909.00	\$13,315.00	\$11,383.00
445 x 22.5	New Truck	22.5 x 13 x 10	86"	60,000	\$20,461.00	\$13,315.00	\$11,383.00
400 / 55 x 22.5	16 Ply	22.5 x 13 x 10	86"	46,900	\$22,975.00	\$13,315.00	\$11,383.00
560 / 45 x 22.5	16 Ply	22.5 x 16 x 10	92"	57,800	\$26,533.00	\$15,751.00	\$11,383.00

Options	Price
Optional Reach Lengths: 8', 12', 14', 16', 18', 20', 22', 24', 26'	
Add or subtract price per foot for over or under 10' (includes both reach poles)	\$69.00
Narrow track (Custom Build) down to 60" (stake posts may ship loose)	\$708.00
2 Wheel HD hydraulic disc brakes c/w flat face brake line coupler	\$3,312.00
4 Wheel HD hydraulic disc brakes c/w flat face brake line coupler	\$6,107.00
Pioneer male coupler on brake line, in lieu of flat face brake coupler	\$0.00
Double spring tongue balancer	\$190.00
4" bolt on riser kit (other heights available)	\$616.00

*Used tires may not meet local regulations, check with your local authority before purchasing.

8 WHEEL

MODELS

LEADERS RISE ABOVE

The true power of 4 x 4. Horst Wagons welcomes you to a new generation of running gear. Designed for smoother travel and minimal soil compaction, the QuadSteer is changing the way you move from the field to the farm. With the addition of a dual front axle set, the QuadSteer combines two advantages into one: improved floatation and easier steering. Unlike any other running gear, the QuadSteer's second steering axle provides better weight distribution at the front of the wagon - especially while turning, when soil compaction happens most.

WHEELBASE MEASUREMENTS: are taken from the centre of the rear tandem axle to the front axle of front tandem.

NOTE: The rated capacities provided are for the chassis only and rims and tires should be matched accordingly when ordered.



STANDARD FEATURES



RETRACTABLE AUTOMATIC RELOCK TONGUE LATCH
(with standard variable adjustment)

Take the precision work out of hooking up by freely moving the tongue into place and watch it lock into place as soon as it's in motion.



TAPERED ROLLER BEARINGS IN MAIN PIVOT POINTS

Roller bearings keep pivot points tight, ensuring no trailer sway and long-lasting use.



AUTOMOTIVE BALL JOINTS

Automotive style ball joints not only keep our wagons behind you they also provide years of hard working service.



TANDEM WALKING BEAM AXLE

Ensures weight is evenly distributed on the back wheels across a variety of terrain. Triangulated for increased strength the tandem axle uses two mounts reducing flex under travel.



QUAD STEER FRONT WHEELS

Our dual front axle set provides better weight distribution allowing easier steering and a smoother ride.



SAFETY CHAINS

Grade 70 safety chains to help provide safe towing

MODEL 308

FEATURES

- 20 ton (40,000 lbs.)
- Double tandem wagon gear
- Front Tandem has quad steering c/w bearings on king pins
- Quick hitch tongue
- Standard reach length 11'
- Hubs - 8 Stud
- Safety chain (1/2" Gr. 70)
- Wheelbase adjustable 13' 5" - 15' 11"
(taken from the centre of the rear tandem axle to the front axle of front tandem.)



Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
14L x 16.1	12 Ply	16.1 x W11C x 8	89"	37,400	\$15,432.00	\$10,368.00	\$9,008.00
16.5 x 16.1	14 Ply	16.1 x W14C x 8	89"	40,000	\$17,248.00	\$11,080.00	\$9,008.00
19L x 16.1	12 Ply	16.1 x W16C x 8	91"	40,000	\$18,792.00	\$11,336.00	\$9,008.00
21.5 x 16.1	14 Ply	16.1 x W16C x 8	91"	40,000	\$21,480.00	\$11,336.00	\$9,008.00
11 x 22.5	Used Truck*	22.5 x 8.25 x 8 HD	89"	40,000	\$11,592.00	\$10,736.00	\$9,008.00
12 or 315 x 22.5	Used Truck*	22.5 x 8.25 x 8 HD	89"	40,000	\$12,280.00	\$10,736.00	\$9,008.00
305 x 22.5	Used Truck*	22.5 x 8.25 x 8 HD	89"	40,000	\$12,072.00	\$10,736.00	\$9,008.00
385 x 22.5	Used Truck*	22.5 x 11.75 x 8	89"	40,000	\$12,624.00	\$11,080.00	\$9,008.00
385 x 22.5	New Truck	22.5 x 11.75 x 8	89"	40,000	\$19,616.00	\$11,080.00	\$9,008.00
425 x 22.5	Used Truck*	22.5 x 11.75 x 8	89"	40,000	\$13,152.00	\$11,080.00	\$9,008.00
425 x 22.5	New Truck	22.5 x 11.75 x 8	89"	40,000	\$19,872.00	\$11,080.00	\$9,008.00
425 x 22.5	Used Truck*	22.5 x 13 x 8	86"	40,000	\$13,520.00	\$11,448.00	\$9,008.00
425 x 22.5	New Truck	22.5 x 13 x 8	86"	40,000	\$20,240.00	\$11,448.00	\$9,008.00
445 x 22.5	New Truck	22.5 x 13 x 8	86"	40,000	\$20,976.00	\$11,448.00	\$9,008.00
400 / 55 x 22.5	16 Ply	22.5 x 13 x 8	86"	40,000	\$24,328.00	\$11,448.00	\$9,008.00

Options	Price
Optional Reach Lengths: 9', 12', 14', 16', 18', 20', 22'	
Add or subtract price per foot for over or under 11' (includes both reach poles)	\$36.00
2 Wheel HD hydraulic disc brakes c/w flat face brake line coupler, must use 22.5 rim	\$3,312.00
4 Wheel HD hydraulic disc brakes c/w flat face brake line coupler, must use 22.5 rim	\$6,107.00
Pioneer male coupler on brake line, in lieu of flat face brake coupler	\$0.00
Disc brake flanges for future add on (per axle)	\$271.00
Single spring tongue balancer	\$115.00
Double spring tongue balancer	\$190.00
4" bolt on riser kit (other heights available)	\$708.00

*Used tires may not meet local regulations, check with your local authority before purchasing.

MODEL 608

HEAVY DUTY WAGON

FEATURES

- 40 ton (80,000 lbs.)
- Double tandem wagon gear
- Front Tandem has quad steering c/w bearings on king pins
- Quick hitch tongue
- Rocking bolster
- Standard reach length 10'
- Hubs - 10 Stud
- Disc brake flanges
- Safety chain (5/8" Gr. 70)
- Wheelbase adjustable 15' 2" - 16' 8" (taken from the centre of the rear tandem axle to the front axle of front tandem.)



Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
425 x 22.5	Used Truck*	22.5 x 13 x 10	86"	80,000	\$23,436.00	\$21,364.00	\$18,788.00
425 x 22.5	New Truck	22.5 x 13 x 10	86"	80,000	\$30,156.00	\$21,364.00	\$18,788.00
445 x 22.5	New Truck	22.5 x 13 x 10	86"	80,000	\$30,892.00	\$21,364.00	\$18,788.00
400 / 55 x 22.5	16 Ply	22.5 x 13 x 10	86"	62,550	\$34,244.00	\$21,364.00	\$18,788.00
560 / 45 x 22.5	16 Ply	22.5 x 16 x 10	92"	77,100	\$38,988.00	\$24,612.00	\$18,788.00

Options	Price
Optional Reach Lengths: 8', 12', 14', 16', 18', 20', 22', 24'	
Add or subtract price per foot for over or under 10' (includes both reach poles)	\$69.00
2 Wheel HD hydraulic disc brakes c/w flat face brake line coupler	\$3,312.00
4 Wheel HD hydraulic disc brakes c/w flat face brake line coupler	\$6,107.00
Pioneer male coupler on brake line, in lieu of flat face brake coupler	\$0.00
Double spring tongue balancer	\$190.00
4" bolt on riser kit (other heights available)	\$708.00

*Used tires may not meet local regulations, check with your local authority before purchasing.

Reach Pole Guidelines

Guidelines for Reach Pole Length Requirements						
	4 Wheel Std.	6 Wheel Std.	8 Wheel Std.	4 Wheel HD	6 Wheel HD	8 Wheel HD
Forage Box Length						
16'	11' Round	11' Round	9' Round	10' Square	10' Square	N/A
18'	12' Round	12' Round	9' Round	12' Square	12' Square	8' Square
20'	14' Round	14' Round	11' Round	14' Square	14' Square	10' Square
22'	N/A	16' Round	12' Round	16' Square	16' Square	12' Square
24'	N/A	18' Round	14' Round	18' Square	18' Square	14' Square
26'	N/A	20' Round	16' Round	20' Square	20' Square	16' Square
Flat Rack and/or Bale Carrier Length						
16'	WA145 - 6'7" Round Other Mod- els - 11' Round	11' Round	9' Round	10' Square	N/A	N/A
18'	12' Round	12' Round	9' Round	10' Square	N/A	N/A
20'	14' Round	14' Round	11' Round	12' Square	N/A	N/A
25'	18' Round	16' Round	14' Round	16' Square	N/A	N/A
30'	22' Round	20' Round	18' Round	20' Square	18' Square	16' Square
36'	N/A	24' Round (Re- quires Support)	20' Round	24' Square	22' Square	18' Square
42'	N/A	N/A	N/A	N/A	26' Square	22' Square
Gravity Box Sizes						
250 Bu.	12 to 14 Ton Wagon 9' Round	N/A	N/A	N/A	N/A	N/A
250-500 Bu.	12 to 14 Ton Wagon 11' Round	N/A	N/A	8' Square	N/A	N/A
500-600 Bu.	N/A	N/A	N/A	10' Square	N/A	N/A
750 Bu.	N/A	N/A	N/A	14' Square	N/A	N/A

TRAILER

CHASSIS

TRAILER RUNNING GEAR

Our trailer chassis running gear offers all the strength and quality of our wagon models but with the easy to use features and handling of a standard tandem axle trailer. Three pairs of fixed bolsters provide the flexibility you need to mount a variety of forage boxes, gravity boxes, or racks.



STANDARD FEATURES



HEAVY DUTY JACK *(with standard variable adjustment)*

Welded jack stand supports the trailer chassis when not in use. It features a quick release foot to partially raise it before cranking. *(TR505 & TR605 only)*



SAFETY CHAINS

Grade 70 safety chains to help provide safe towing.



PIVOTING HITCH

The pivoting clevis helps to reduce the operating tension at the hitch, allowing the towed unit and the tow vehicle to track independently over uneven ground. *(TR505 & TR605 only)*



TANDEM WALKING BEAM AXLE

Ensures weight is evenly distributed on the back wheels across a variety of terrain. Triangulated for increased strength the tandem axle uses two mounts reducing flex under travel. *(TR505 & TR605 only)*

MODEL TR505

FEATURES

- 20 ton (40,000 lbs.)
- Trailer style running gear
- Hubs - 8 Stud
- Heavy duty jack
- Safety chain (1/2" Gr. 70)
- Disc brake flanges



Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
16.5 x 16.1	14 Ply	16.1 x W14C x 8	79"	25,600	\$15,817.00	\$12,733.00	\$11,697.00
19L x 16.1	12 Ply	16.1 x W16C x 8	81"	24,000	\$16,589.00	\$12,861.00	\$11,697.00
21.5 x 16.1	14 Ply	16.1 x W16C x 8	81"	31,400	\$17,933.00	\$12,861.00	\$11,697.00
425 x 22.5	Used Truck*	22.5 x 13 x 8	76"	40,000	\$13,953.00	\$12,917.00	\$11,697.00
425 x 22.5	New Truck	22.5 x 13 x 8	76"	40,000	\$17,313.00	\$12,917.00	\$11,697.00
445 x 22.5	New Truck	22.5 x 13 x 8	76"	40,000	\$17,681.00	\$12,917.00	\$11,697.00
400 / 55 x 22.5	16 Ply	22.5 x 13 x 8	76"	31,250	\$19,357.00	\$12,917.00	\$11,697.00
560 / 45 x 22.5	16 Ply	22.5 x 16 x 8	82"	38,550	\$21,729.00	\$14,541.00	\$11,697.00

Options	Price
2 Wheel HD hydraulic disc brakes c/w flat face brake line coupler, must use 22.5 rim	\$3,312.00
4 Wheel HD hydraulic disc brakes c/w flat face brake line coupler, must use 22.5 rim	\$6,107.00
Pioneer male coupler on brake line, in lieu of flat face brake coupler	\$0.00
4" bolt on riser kit (other heights available)	\$708.00

*Used tires may not meet local regulations, check with your local authority before purchasing.

MODEL TR605

FEATURES

- 24 ton (48,000 lbs)
- Trailer style running gear
- Hubs - 10 Stud
- Heavy duty jack
- Safety chain (5/8" Gr. 70)
- Disc brake flanges



Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
425 x 22.5	Used Truck*	22.5 x 13 x 10	76"	48,000	\$16,085.00	\$15,049.00	\$13,761.00
425 x 22.5	New Truck	22.5 x 13 x 10	76"	48,000	\$19,445.00	\$15,049.00	\$13,761.00
445 x 22.5	New Truck	22.5 x 13 x 10	76"	48,000	\$19,813.00	\$15,049.00	\$13,761.00
400 / 55 x 22.5	16 Ply	22.5 x 13 x 10	76"	31,250	\$21,489.00	\$15,049.00	\$13,761.00
560 / 45 x 22.5	16 Ply	22.5 x 16 x 10	82"	38,550	\$23,861.00	\$16,673.00	\$13,761.00

Options	Price
2 Wheel HD hydraulic disc brakes c/w flat face brake line coupler	\$3,312.00
4 Wheel HD hydraulic disc brakes c/w flat face brake line coupler	\$6,107.00
Pioneer male coupler on brake line, in lieu of flat face brake coupler	\$0.00
4" bolt on riser kit (other heights available)	\$708.00

*Used tires may not meet local regulations, check with your local authority before purchasing.

MODEL TR505RF

SUSPENSION TRAILER

FEATURES

- 20 ton (40,000 lbs.)
- Trailer style running gear
- Road Flex Suspension
- Hubs - 8 Stud
- Articulating ball hitch
- Safety chain (1/2" Gr. 70)
- Disc brake flanges
- Tongue suspension
- Hydraulic jack stand



Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
16.5 x 16.1	14 Ply	16.1 x W14C x 8	79"	25,600	\$26,528.00	\$23,444.00	\$22,408.00
19L x 16.1	12 Ply	16.1 x W16C x 8	81"	24,000	\$27,300.00	\$23,572.00	\$22,408.00
21.5 x 16.1	14 Ply	16.1 x W16C x 8	81"	31,400	\$28,644.00	\$23,572.00	\$22,408.00
425 x 22.5	Used Truck*	22.5 x 13 x 8	76"	40,000	\$24,664.00	\$23,628.00	\$22,408.00
425 x 22.5	New Truck	22.5 x 13 x 8	76"	40,000	\$28,024.00	\$23,628.00	\$22,408.00
445 x 22.5	New Truck	22.5 x 13 x 8	76"	40,000	\$28,392.00	\$23,628.00	\$22,408.00
400 / 55 x 22.5	16 Ply	22.5 x 13 x 8	76"	31,250	\$30,068.00	\$23,628.00	\$22,408.00
560 / 45 x 22.5	16 Ply	22.5 x 16 x 8	82"	38,550	\$32,440.00	\$25,252.00	\$22,408.00

Options	Price
2 Wheel HD hydraulic disc brakes c/w flat face brake line coupler, must use 22.5 rim	\$3,312.00
4 Wheel HD hydraulic disc brakes c/w flat face brake line coupler, must use 22.5 rim	\$6,107.00
Pioneer male coupler on brake line, in lieu of flat face brake coupler	\$0.00
4" bolt on riser kit (other heights available)	\$708.00

*Used tires may not meet local regulations, check with your local authority before purchasing.

MODEL TR605RF

SUSPENSION TRAILER

FEATURES

- 24 ton (48,000 lbs.)
- Trailer style running gear
- Road Flex Suspension
- Hubs - 10 Stud
- Articulating ball hitch
- Safety chain (5/8" Gr. 70)
- Disc brake flanges
- Tongue suspension
- Hydraulic jack stand




Tire Size	Tire Type	Rim Size	Track Width	GVWR (lbs.)	Wagon c/w Tires & Rims	Wagon c/w Rims, Less Tires	Wagon Less Rims, Less Tires
425 x 22.5	Used Truck*	22.5 x 13 x 10	76"	48,000	\$27,406.00	\$26,370.00	\$25,082.00
425 x 22.5	New Truck	22.5 x 13 x 10	76"	48,000	\$30,766.00	\$26,370.00	\$25,082.00
445 x 22.5	New Truck	22.5 x 13 x 10	76"	48,000	\$31,134.00	\$26,370.00	\$25,082.00
400 / 55 x 22.5	16 Ply	22.5 x 13 x 10	76"	31,250	\$32,810.00	\$26,370.00	\$25,082.00
560 / 45 x 22.5	16 Ply	22.5 x 16 x 10	82"	38,550	\$35,182.00	\$27,994.00	\$25,082.00

Options	Price
2 Wheel HD hydraulic disc brakes c/w flat face brake line coupler	\$3,312.00
4 Wheel HD hydraulic disc brakes c/w flat face brake line coupler	\$6,107.00
Pioneer male coupler on brake line, in lieu of flat face brake coupler	\$0.00
4" bolt on riser kit (other heights available)	\$708.00

*Used tires may not meet local regulations, check with your local authority before purchasing.

DOLLY

The trailer Dolly from Horst provides a safe economical platform for transporting 2PH implements.

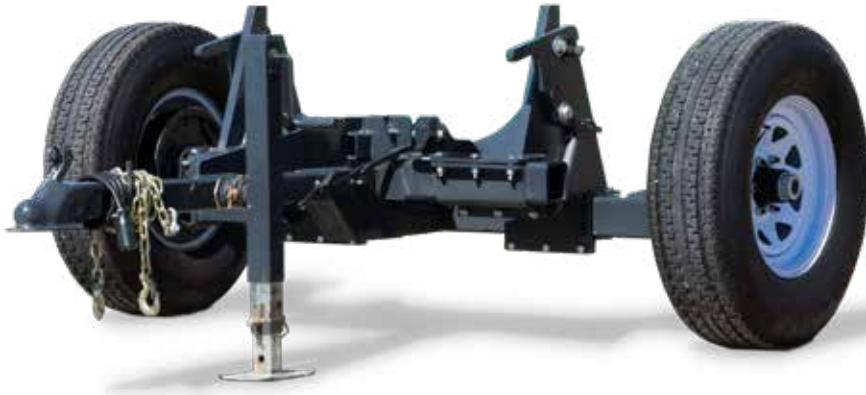

FEATURES

- Capacity 5,000 lbs.
- Ball Hitch (2-5/16)
- 7 pin RV style connector (to vehicle)
- Electric Brakes
- 235/85 R16 highway trailer tires
- 16 x 6 x 6 Rim
- Compatible with CAT 2, 3N, and 3, 2 point hitches
- Safety lock securely holds pins
- 2" receiver for draw bars
- 7 pin ag receptacle for implement electrics

Model	Price
2PH Dolly	\$4,601.00



SCALES *Digi-Star*★



The optional Digi-Star scale system comes equipped with four load cells and a control console giving you up to the second readouts on the weight of your load so you know exactly how much you're hauling.

FEATURES

- Know crop yields by the field
- Calibrate combine and forage harvesters yield monitors
- Compare individual fields, soil types, seed hybrids, fertilizer types, tillage equipment and methods
- Keep your road loads legal weight
- Document each and every load
- Saves time by weighing in the field vs. hauling to a platform scale
- Helps make more informed decisions for managing land for best performance and profitability

Model	Pricing
Scale Kit (Factory Installed)	\$8,683.00



CAPACITY OVERVIEW WAGONS AND TRAILERS

Features	ROAD FLEX SUSPENSION 4-Wheel		ROAD FLEX SUSPENSION 6-Wheel	
	4-Wheel	4-Wheel	6-Wheel	6-Wheel
Weight Capacity*	6-24 ton	10-24 ton	12-30 ton	18-22 ton
Wagon Tongue	Retractable	Retractable	Retractable	Retractable
Tapered Bearings	Yes	Yes	Yes	Yes
Ball Joints	Automotive	Automotive	Automotive	Automotive
Tandem Axle	No	No	Rear	Rear
Models	145 (8 ton) 185 (10 ton) 185F (6 ton) 205 (12 ton) 275 (14 ton) 285 (15 ton) 365E (20 ton) 365 (20 ton) 485 (24 ton)	185RF (10 ton) 205RF (12 ton) 285RF (15 ton) 365RF (20 ton) 485RF (24 ton)	245 (12 ton) 265 (14 ton) 325 (18 ton) 505 (22 ton) 605 (30 ton)	325RF (18 ton) 505RF (22 ton)

WAGON SPECIFICATIONS

Model	4 Wheel Models				
	145	185	185F	205	275
Capacity* (30 kph / 20 mph)	16,000 lbs.	20,000 lbs.	12,000 lbs.	24,000 lbs.	28,000 lbs.
Capacity* (50 kph / 30 mph)	12,000 lbs.	18,000 lbs.	12,000 lbs.	18,000 lbs.	24,000 lbs.
Spindles	1-3/4" Dia. C1045 Hot Rolled	2" Dia. C1045 Hot Rolled	2" Dia. C1045 Hot Rolled	2-1/4" Dia. C1045 Cold Rolled	2-3/4" Dia. C1045 Cold Rolled
Hubs	6 Bolt	6 Bolt	6 Bolt	8 Bolt	8 Stud
Bearings - Bore Size (Inner/Outer)	Taper Roller 1.50 / 1.25	Taper Roller 1.80 / 1.38	Taper Roller 1.80 / 1.38	Taper Roller 1.80 / 1.38	Taper Roller 2.165 / 1.625
Front Axle	5.5 x 3 x .188 Wall	6 x 3 x .250 Wall	6 x 3 x .250 Wall	7 x 3 x .250 Wall	8 x 3.5 x .250 Wall
Rear Axle	5.5 x 3 x .188 Wall	6 x 3 x .250 Wall	6 x 3 x .250 Wall	7 x 3 x .250 Wall	8 x 3.5 x .250 Wall
Tongue Bracket Mounting	1-1/2" Bolt Bearing Mtd.				
Tongue Bolt	7/8" Diameter		1-1/8" Diameter		
Tongue Latch	Retractable Automatic Relock - Standard on All Models				
Reach Poles	3" O.D. x .188 Wall - Round Tube				
Wheelbase	Adjustable				
Bolster Stakes	Adjustable 38.5" - 40.5" - 42.5"				42.5" Fixed
Steering	Automotive Type				
Tie Rod Ends	Greasable Automotive Style Ball Joints				
Height from Ground to Top of Bunk	24" on 11L x 15 Tires	24" on 11L x 15 Tires	24" on 11L x 15 Tires	26" on 12.5 x 16 Tires 30" on 11 x 22.5 Tires	30" on 11 x 22.5 Tires
Approx. Weight**	535 lbs.	740 lbs.	1,000 lbs.	845 lbs.	1,015 lbs.
2 Wheel Hyd. Drum Surge Brakes	N/A	N/A	N/A	Optional	Optional
4 Wheel Hyd. Drum Surge Brakes	N/A	N/A	N/A	N/A	N/A
2 Wheel Hydraulic Disc Brakes	N/A	N/A	N/A	N/A	Optional
4 Wheel Hydraulic Disc Brakes	N/A	N/A	N/A	N/A	N/A
Safety Chain	3/8" Gr. 70				1/2" Gr. 70
Spring Balancer Kit	Optional				
Rocking Bolster	Optional				
4" Bolt on Riser Kit	Optional				



Features	8-Wheel (Quad Steer)	8-Wheel (Quad Steer)	Trailer Chassis	Trailer Chassis
Weight Capacity*	20-40 ton	20 ton	20-24 ton	20-24 ton
Wagon Tongue	Retractable	Retractable	Clevis Hitch	Articulating Ball Hitch
Tapered Bearings	Yes	Yes	Yes	Yes
Ball Joints	Automotive	Automotive	NA	NA
Tandem Axle	Front and Rear	Front and Rear	Yes	Yes
Models	308 Quad (20 ton) 608 Quad (40 ton)	308RF (20 ton)	TR505 (20 ton) TR605 (24 ton)	TR505RF (20 ton) TR605RF (24 ton)

6 Wheel Models			8 Wheel Models	
245	265	325	308	608
24,000 lbs.	28,000 lbs.	36,000 lbs.	40,000 lbs.	80,000 lbs.
24,000 lbs.	27,000 lbs.	36,000 lbs.	40,000 lbs.	80,000 lbs.
Front: 2" Dia. C1045 Hot Rolled Rear: 2-1/4" Dia. C1045 Cold Rolled	2-1/4" Dia. C1045 Cold Rolled	3" Dia. C1045 Cold Rolled	3" Dia. C1045 Cold Rolled	4" Dia. C1045 Cold Rolled
6 Bolt	8 Bolt	8 Stud	8 Stud	10 Stud
Taper Roller 1.80 / 1.38	Taper Roller 1.80 / 1.38	Taper Roller 2.165 / 1.625	Taper Roller 2.165 / 1.625	Taper Roller 2.165 / 1.625
6 x 3 x .250 Wall	7 x 3 x .250 Wall	8 x 3.5 x .250 Wall	8 x 3.5 x .250 Wall	10 x 4 x .500 Wall
6 x 3 x .250 Wall	7 x 3 x .313 Wall	8 x 4 x .250 Wall	8 x 4 x .250 Wall	10 x 4 x .500 Wall
1-1/2" Bolt Bearing Mtd.				
1-1/8" Diameter			1-1/2" Dia.	
Retractable Automatic Relock - Standard on All Models				
3" O.D. x .188 Wall - Round Tube			6 x 4 x .188 Tubes	
Adjustable				
Adjustable 38.5" - 40.5" - 42.5"	42.5" Fixed			
Automotive Type				
Greaseable Automotive Style Ball Joints				
23" on 11L x 15 Tires	26" on 12.5 x 16 Tires	30" on 11 x 22.5 Tires	30" on 11 x 22.5 Tires	24" on 445/65 x 22.5 Tires
985 lbs.	1,155 lbs.	1,495 lbs.	2,135 lbs.	3,020 lbs.
N/A	Optional	N/A	N/A	N/A
N/A	Optional	N/A	N/A	N/A
N/A	N/A	Optional	Optional	Optional
N/A	N/A	Optional	Optional	Optional
3/8" Gr. 70	1/2" Gr. 70		5/8" Gr. 70	
Optional			N/A	Standard
Optional				

*The rated capacities provided are for the chassis only, tire size determines GVWR

** Noted weights are approximate and less rims and tires.

HEAVY DUTY WAGON SPECIFICATIONS

Model	4 Wheel Models			
	285	365E	365	485
Capacity* (30 kph / 20 mph)	30,000 lbs.	40,000 lbs.	40,000 lbs.	48,000 lbs.
Capacity* (50 kph / 30 mph)	24,000 lbs.	36,000 lbs.	36,000 lbs.	48,000 lbs.
Spindles	2-3/4" Dia. C1045 Cold Rolled	3" Dia. 1144 Stress Proof	3" Dia. 1144 Stress Proof	4" Dia. C1045 Cold Rolled
Hubs	8 Stud	8 Stud	8 Stud	10 Stud
Front Axle	8 x 4 x .250 Wall	10 x 4 x .250 Wall	10 x 4 x .250 Wall	10 x 4 x .500 Wall
Rear Axle	8 x 4 x .188 Wall	10 x 4 x .188 Wall	10 x 4 x .188 Wall	10 x 4 x .375 Wall
Tongue Bracket Mounting	1-1/2" Bolt Bearing Mtd.			
Tongue Bolt	1-1/8" Dia.	1-1/8" Dia.	1-1/8" Dia.	1-1/2" Dia.
Bolster	Flexible Front			
Reach Tubes	6 x 4 x .188 Tubes			
Bolster Stakes	42.5" Fixed			
Steering	Automotive Type			
Tie Rod Ends	Greasable Automotive Style Ball Joints			
Wheelbase	Adjustable			
Height from Ground to Top of Bunk	32" on 445/65 x 22.5 Tires	34" on 445/65 x 22.5 Tires	34" on 445/65 x 22.5 Tires	34" on 445/65 x 22.5 Tires
Approx. Weight**	1,445 lbs.	1,495 lbs.	1,595 lbs.	2,210 lbs.
2 Wheel Hydraulic Disc Brakes	Optional			
4 Wheel Hydraulic Disc Brakes	N/A	N/A	N/A	N/A
Safety Chain	1/2" Gr. 70		5/8" Gr. 70	
Spring Balancer Kit	Optional			
Rocking Bolster	Standard			
4" Bolt on Riser Kit	Optional			

Model	6 Wheel Models	
	505	605
Capacity* (30 kph / 20 mph)	44,000 lbs.	60,000 lbs.
Capacity* (50 kph / 30 mph)	44,000 lbs.	60,000 lbs.
Spindles	3" Dia. 1144 Stress Proof	4" Dia. C1045 Cold Rolled
Hubs	8 Stud	10 Stud
Front Axle	10 x 4 x .250 Wall	10 x 4 x .500 Wall
Rear Axle	10 x 4 x .375 Wall	10 x 4 x .500 Wall
Tongue Bracket Mounting	1-1/2" Bolt Bearing Mtd.	
Tongue Bolt	1-1/8" Dia.	1-1/2" Dia.
Bolster	Flexible Front	
Reach Tubes	6 x 4 x .188 Tubes	
Bolster Stakes	42.5" Fixed	
Steering	Automotive Type	
Tie Rod Ends	Greasable Automotive Style Ball Joints	
Wheelbase	Adjustable	
Height from Ground to Top of Bunk	32" on 445/65 x 22.5 Tires	34" on 445/65 x 22.5 Tires
Approx. Weight**	2,405 lbs.	3,295 lbs.
2 Wheel Hydraulic Disc Brakes	Optional	
4 Wheel Hydraulic Disc Brakes	Optional	
Safety Chain	1/2" Gr. 70	5/8" Gr. 70
Spring Balancer Kit	Optional	
Rocking Bolster	Standard	
4" Bolt on Riser Kit	Optional	

*The rated capacities provided are for the chassis only, tire size determines GVWR

** Noted weights are approximate and less rims and tires.

ROAD FLEX SUSPENSION WAGON SPECIFICATIONS

	4 Wheel Models				
Model	185RF	205RF	285RF	365RF	485RF
Capacity* (30 kph / 20 mph)	20,000 lbs.	24,000 lbs.	30,000 lbs.	40,000 lbs.	48,000 lbs.
Capacity* (50 kph / 30 mph)	18,000 lbs.	18,000 lbs.	24,000 lbs.	36,000 lbs.	48,000 lbs.
Spindles	2" Dia. C1045 Hot Rolled	2-1/4" Dia. C1045 Cold Rolled	2.75" Dia. C1045 Cold Rolled	3" Dia. 1144 Stress Proof	4" Dia. C1045 Cold Rolled
Hubs	6 Bolt	8 Bolt	8 Stud	8 Stud	10 Stud
Front Axle	6 x 3 x .250 Wall	7 x 3 x .250 Wall	8 x 4 x .250 Wall	10 x 4 x .250 Wall	10 x 4 x .500 Wall
Rear Axle	6 x 3 x .250 Wall	7 x 3 x .250 Wall	8 x 4 x .188 Wall	10 x 4 x .188 Wall	10 x 4 x .375 Wall
Tongue Bracket Mounting	1-1/2" Bolt Bearing Mtd.				
Tongue Bolt	1-1/8" Dia.	1-1/8" Dia.	1-1/8" Dia.	1-1/8" Dia.	1-1/2" Dia.
Bolster	N/A			Flexible Front	
Reach Tubes	3" O.D. x .188 Wall Round Tube			6 x 4 x .188 Tubes	
Bolster Stakes	Adj. 38.5" - 40.5" - 42.5"			42.5" Fixed	
Steering	Automotive Type				
Tie Rod Ends	Greaseable Automotive Style Ball Joints				
Wheelbase	Adjustable				
Height from Ground to Top of Bunk	26" on 11Lx15 Tires	27" on 12.5 x 16 Tires 31" on 11 x 22.5 Tires	39" on 445/65 x 22.5 Tires	39" on 445/65 x 22.5 Tires	40" on 445/65 x 22.5 Tires
Approx. Weight**	1,150 lbs.	1,270 lbs.	3,085 lbs.	3,505 lbs.	4,370 lbs.
2 Wheel Hyd. Drum Surge Brakes	N/A	Optional	N/A	N/A	N/A
2 Wheel Hydraulic Disc Brakes	N/A	N/A	Optional		
4 Wheel Hydraulic Disc Brakes	N/A	N/A	Optional		
Safety Chain	3/8" Gr. 70		1/2" Gr. 70		5/8" Gr. 70
Spring Balancer Kit	Optional				
Rocking Bolster	N/A	N/A	N/A	N/A	N/A
4" Bolt on Riser Kit	Optional				


	6 Wheel Models		8 Wheel Models
Model	325RF	505RF	308RF
Capacity* (30 kph / 20 mph)	36,000 lbs.	44,000 lbs.	40,000 lbs.
Capacity* (50 kph / 30 mph)	36,000 lbs.	44,000 lbs.	40,000 lbs.
Spindles	3" Dia. C1045 Cold Rolled	3" Dia. 1144 Stress Proof	3" Dia. C1045 Cold Rolled
Hubs	8 Stud	8 Stud	8 Stud
Front Axle	8 x 3.5 x .250 Wall	10 x 4 x .250 Wall	8 x 3.5 x .250 Wall
Rear Axle	8 x 4 x .250 Wall	10 x 4 x .375 Wall	8 x 4 x .250 Wall
Tongue Bracket Mounting	1-1/2" Bolt Bearing Mtd.		
Tongue Bolt	1-1/8" Dia.	1-1/2" Dia.	1-1/8" Dia.
Bolster	N/A		
Reach Tubes	3" O.D. x .188 Wall Round Tube	6 x 4 x .188 Tubes	3" O.D. x .188 Wall Round Tube
Bolster Stakes	42.5" Fixed		
Steering	Automotive Type		
Tie Rod Ends	Greaseable Automotive Style Ball Joints		
Wheelbase	Adjustable		
Height from Ground to Top of Bunk	33" on 11 x 22.5 Tires	32" on 445/65 x 22.5 Tires	33" on 11 x 22.5 Tires
Approx. Weight**	2,185 lbs.	3,325 lbs.	3,030 lbs.
2 Wheel Hydraulic Disc Brakes	Optional		
4 Wheel Hydraulic Disc Brakes	Optional		
Safety Chain	1/2" Gr. 70		
Spring Balancer Kit	Optional		
Rocking Bolster	N/A		
4" Bolt on Riser Kit	Optional		

*The rated capacities provided are for the chassis only, tire size determines GVWR

** Noted weights are approximate and less rims and tires.

TRAILER CHASSIS SPECIFICATIONS

Model	Trailer Chassis			
	TR505	TR605	TR505RF	TR605RF
Capacity* (30 kph / 20 mph)	40,000 lbs.	48,000 lbs.	40,000 lbs.	48,000 lbs.
Capacity* (50 kph / 30 mph)	36,000 lbs.	48,000 lbs.	36,000 lbs.	48,000 lbs.
Spindles	3" Dia. 1144 Stress Proof	4" Dia. C1045 Cold Rolled	3" Dia. 1144 Stress Proof	4" Dia. C1045 Cold Rolled
Hubs	8 Stud	10 Stud	8 Stud	10 Stud
Bolster Stakes	42.5" Fixed		42.5" Fixed	
Height from Ground to Top of Bunk	32" on 445/65 x 22.5 Tires	34" on 445/65 x 22.5 Tires	39" on 445/65 x 22.5 Tires	40" on 445/65 x 22.5 Tires
Approx. Weight**	2,700 lbs.	3,775 lbs.	5,270 lbs.	5,885 lbs.
2 Wheel Hydraulic Disc Brakes	Optional		Optional	
4 Wheel Hydraulic Disc Brakes	Optional		Optional	
Safety Chain	1/2" Gr. 70	5/8" Gr. 70	1/2" Gr. 70	5/8" Gr. 70
4" Bolt on Riser Kit	Optional		Optional	
Bolster Measurement A	137"	137"	140"	140"
Bolster Measurement B	156"	182"	156"	182"
Bolster Measurement C	128"	134"	101"	107"
Bolster Measurement D	28"	48"	55"	75"

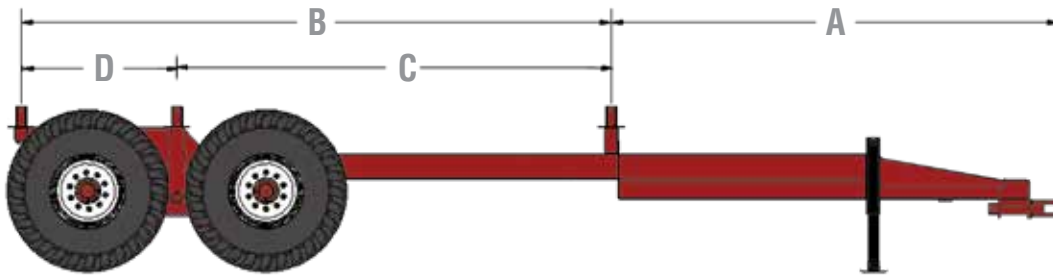

*The rated capacities provided are for the chassis only, tire size determines GVWR

** Noted weights are approximate and less rims and tires.

STANDARD & OPTIONAL EQUIPMENT FOR RUNNING GEAR

NOTE: Standard and optional running gear equipment varies. Verify features and options availability on model page.

Rocking Bolster



Front View




Rear View

Our heavy duty bolsters let you solidly attach your load from Gravity Bins to Hay Racks. The rocking bolster design allows heavy loads some flex and movement reducing stress on the running gear and providing a better ride. Rocking bolsters are standard equipment on all square tube equipped non-suspension running gear.

Bolster



Riser Kits



4" bolt on riser kit for extra bunk height clearance.

Note: other heights available.

Brake Systems



Drum



Disc

For added safety and stopping power we have brake systems available in drum and disc configurations.

Spring Balancers



Double



Single

Both spring balancers feature tension adjustable springs.

Safety Chains



Our Grade 70 standard equipment safety chains in 3/8", 1/2" and 5/8" sizes make sure your wagon is secure.

NEW IMPLEMENT TIRES (Farm Utility) *See pricing on page 61*

Tire	Approx. Height	Ply	Capacity (Lbs/tire)	Description
26 x 12	26"	12 Ply	2,750	Tubeless Tires on 12 x 10.5 x 6 rims
11L x 15	31"	8 Ply	2,540	Farm Utility Tubeless
12.5L x 15	32.25"	12 Ply	3,640	Farm Utility Tubeless
12.5L x 16	33"	14 Ply	4,180	Farm Utility Tubeless
320 / 17 R15	32.4"	Load Index 146	6,610	IF Implement / Tubeless
14L x 16.1	36"	12 Ply	4,680	Farm Utility Tubeless
16.5 x 16.1	40.5"	14 Ply	6,400	Farm Utility Tubeless
19L x 16.1	42.25"	12 Ply	6,000	Farm Utility Tubeless
21.5 x 16.1	44"	14 Ply	7,850	Farm Utility Tubeless

Tire Ratings are at 25 mph.



26x12 12 Ply



11L x 15 8 Ply



12.5L x 15 12 Ply



12.5L x 16 14 Ply



IF 320/70 R15



14L x 16.1 12 Ply



16.5 x 16.1 14 Ply



19L x 16.1 12 Ply



21.5 x 16.1 14 Ply

*** Images shown for approximate size and profile of tire and rim package only. Relative wheel picture sizing is approximate.*

NEW IMPLEMENT TIRES (Highway Service) *See pricing on page 61*

Tire	Approx. Height	Load Range	Capacity (Lbs/tire)	Description
20.5 x 8-10	20.5"	F	1,650	Tires on 10 x 6 x 6 rims
225/75 R15	28"	D	2,540	Highway Trailer Tubeless Tires on 15 x 6 x 6 rims
235/85 R16	31.5"	F	3,960	Highway Trailer Tubeless Tires on 16 x 8 x 6 rims
235/75 R17.5	31.4"	16 Ply	6,005	Highway Service Tubeless Tires on 17.5 x 6.75 x 8 rims
400/55 x 22.5	40.2"	16 Ply	7,820	Highway Flotation Tubeless Tires on 22.5 x 13
560/45 x 22.5	42.1"	16 Ply	9,640	Highway Flotation Tubeless Tires on 22.5 x 16
11L x 15	30.5"	D	3,120	Highway Service Tubeless Tires Must be used with HD rims
11L x 15	31.25"	F	3,960	Highway Service Tubeless Tires Must be used with HD rims
11L x 15	31.5"	F	3,960	Highway Service Tubeless Tires for Header Wagon
12.5L x 15	33.5"	F	4,680	Highway Service Tubeless Tires Must be used with HD rims

Tire Ratings are at 25 mph.



20.5 x 8-10 Load Range F



225/75 R15 Load Range D



235/85 R16 Load Range F



11L x 15 Load Range F



11L x 15 Load Range D



11L x 15 Load Range F



12.5L x 15 Load Range F



Available Sizes:
560/45 x 22.5 16 Ply
400/55 x 22.5 16 Ply

** Images shown for approximate size and profile of tire and rim package only. Relative wheel picture sizing is approximate.

USED TRUCK TIRES

See pricing on page 61

Tire	Approx. Height	Tubeless	Capacity (Lbs/tire)*	Rim Size Required
245 R16	30"	Tubeless	3,500	16 x 8
11 x 22.5	40.5"	Tubeless	8,000	22.5 x 8.25 HD
305 x 22.5	39"	Tubeless	8,000	22.5 x 8.25 HD
12 or 315 x 22.5	41.5"	Tubeless	8,000	22.5 x 8.25 HD
385 x 22.5	41.75"	Tubeless	10,000	22.5 x 11.75
425 x 22.5	44"	Tubeless	12,000	22.5 x 13 / 22.5 x 11.75

* Capacities on used tires are approximate



245 R16

11 x 22.5

305 x 22.5

12 or 315 x 22.5



385 x 22.5 (15 x 22.5)

425 x 22.5 (16 x 22.5)

USED TIRE WARRANTY

We do our own mounting. They will all be marked and dated. Any tire which goes flat within 90 days of purchase, we will exchange free if it is returned on the rim that it went flat on.

We do not accept repair bills sent to us.

** Images shown for approximate size and profile of tire and rim package only. Relative wheel picture sizing is approximate.

TIRE PRICING

Size	Range	Description	Quantity	Price
11L x 15	8 Ply	Tubeless	Each	\$265.00
12.5L x 15	12 Ply	Tubeless	Each	\$368.00
12.5L x 16	14 Ply	Tubeless	Each	\$452.00
320/17 R15	Load Index 146	Tubeless	Each	\$823.00
14L x 16.1	12 Ply	Tubeless	Each	\$633.00
16.5 x 16.1	14 Ply	Tubeless	Each	\$771.00
19L x 16.1	12 Ply	Tubeless	Each	\$932.00
21.5 x 16.1	14 Ply	Tubeless	Each	\$1,268.00
400/55 x 22.5	16 Ply	Tubeless	Each	\$1,610.00
560/45 x 22.5	16 Ply	Tubeless	Each	\$1,797.00

Size	Range	Description	Quantity	Price
11L x 15	D Range	Highway Service (tubeless) Must be used with H.D. rim	Each	\$446.00
11L x 15	F Range	Highway Service (tubeless) Must be used with H.D. rim	Each	\$478.00
12.5L x 15	F Range	Highway Service (tubeless) Must be used with H.D. rim	Each	\$544.00
20.5 x 8 - 10	F Range	Tire on 10 x 6 x 6 rim	Each	\$271.00
26 x 12	12 Ply	Tubeless Tire on 12 x 10.5 x 6 rim	Each	\$397.00
225/75 R15	D Range	Highway Trailer TL Tire on 15 x 6 x 6 rim	Each	\$366.00
235/85 R16	F Range	Highway Service TL Tire on 16 x 8 x 6 rim	Each	\$460.00
235/75 R17.5	16 Ply	Highway Service TL Tire on 17.5 x 6.75 x 8 rim	Each	\$529.00

Size	Description	Required Rim	Quantity	Price
425 x 22.5	Used Truck Tire Tubeless	22.5 x 13 or 22.5 x 11.75	Each	\$259.00
385 x 22.5	Used Truck Tire Tubeless	22.5 x 11.75	Each	\$193.00
12 x 22.5	Used Truck Tire Tubeless	22.5 x 8.25 HD	Each	\$193.00
305 x 22.5	Used Truck Tire Tubeless	22.5 x 8.25 HD	Each	\$167.00
315 x 22.5	Used Truck Tire Tubeless	22.5 x 8.25 HD	Each	\$193.00
11 x 22.5	Used Truck Tire Tubeless	22.5 x 8.25 HD	Each	\$107.00
235 or 245 R16	Used Pickup Truck Tire Tubeless	16 x 8	Each	\$110.00

Size	Description	Required Rim	Quantity	Price
445 x 22.5	New Truck Tire Tubeless	22.5 x 13	Each	\$1,191.00
425 x 22.5	New Truck Tire Tubeless	22.5 x 13 or 22.5 x 11.75	Each	\$1,099.00
385 x 22.5	New Truck Tire Tubeless	22.5 x 11.75	Each	\$1,067.00

RIM PRICING

Rim	Part Number	Price
12 x 10.5 x 6 Bolt	WH-121056	\$138.00
15 x 6 x 6 Bolt	WH-1566	\$87.00
15 x 8 x 6 Bolt Heavy Duty	WH-1586HD	\$107.00
15 x 10 x 6 Bolt Heavy Duty	WH-15106HD	\$121.00
16 x 6 x 6 Bolt	WH-1666	\$92.00
16 x 8 x 6 Bolt	WH-1686	\$92.00
16 x 10 x 6 Bolt	WH-16106	\$150.00
15 x 10 x 8 Bolt Heavy Duty	WH-15108HD	\$124.00
15 x 10 x 8 Bolt Heavy Duty	WH-15108HDCHCFX*	\$397.00
16 x 8 x 8 Bolt	WH-1688	\$144.00
16 x 10 x 8 Bolt	WH-16108	\$164.00
22.5 x 8.25 x 8 Bolt Heavy Duty	WH-2258258HD	\$216.00
22.5 x 11.75 x 8 Bolt	WH-22511758	\$259.00
22.5 x 11.75 x 8 Bolt	WH-22511758HW205**	\$259.00
22.5 x 13 x 8 Bolt	WH-225138	\$305.00
22.5 x 16 x 8 Bolt	WH-225168	\$711.00
16.1 x W11C x 8 Bolt	WH-161118	\$170.00
16.1 x W14C x 8 Bolt	WH-161148	\$259.00
16.1 x W14C x 8 Bolt	WH-161148HW205***	\$259.00
16.1 x W16C x 8 Bolt	WH-161168	\$291.00
22.5 x 13 x 10 Bolt 14,000 lbs.	WH-2251310	\$322.00
22.5 x 16 x 10 Bolt	WH-2251610	\$728.00

*Used on CHCFX models only.

**Used on models 205 and 205RF only.

***Used on models 205, 205RF, 285 and 285RF only.

Multiply The Prices In This Book By 1.05 OR Call For Accurate Quote

Multiply The Prices In This Book By 1.05 OR Call For Accurate Quote

Distributed By:



Cummings & Bricker, Inc.

Batavia, NY

Phone: 585.343.5411

Carlisle, PA

Phone: 717.249.6720

Email: support@cummingsandbricker.com

www.cummingsandbricker.com