




ROTARY CUTTERS

IDEAL Farm Equipment's Rotary Cutter is designed for cutting rough plant material. Thick grass and saplings are no match for this implement. Use it to create trails, mow fields and clear for wildlife. The heat-treated 2-inch blades can easily handle branches. A stump jumper prevents any potential gearbox or blade damage.

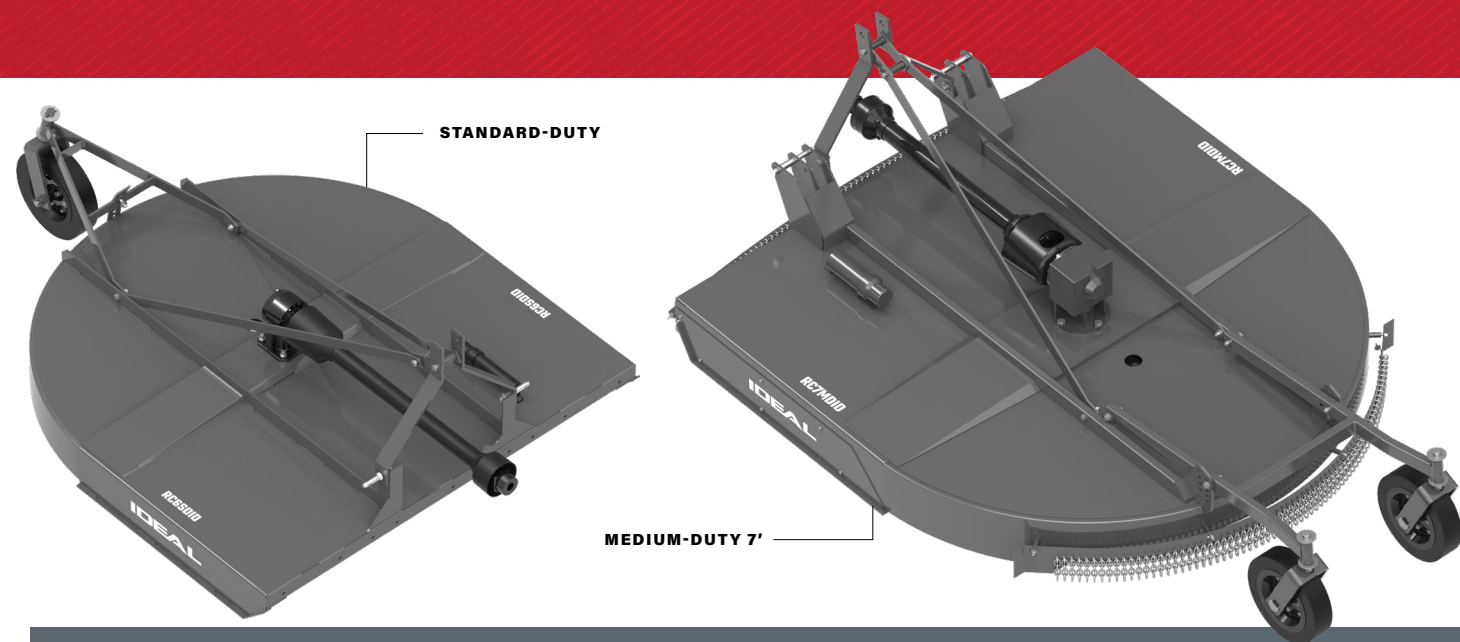

NEW

DESCRIPTION	LIGHT-DUTY 4' ROTARY CUTTER	STANDARD-DUTY 5' ROTARY CUTTER	STANDARD-DUTY 6' ROTARY CUTTER	MEDIUM-DUTY 6' ROTARY CUTTER	MEDIUM-DUTY 7' ROTARY CUTTER
ITEM #	RC4LDID	RC5SDID	RC6SDID	RC6MDID	RC7MDID
TRACTOR HORSEPOWER REQUIRED	18-45	20-50	25-60	28-65	45-90
APPROX. WEIGHT	463 LBS.	530 LBS.	623 LBS.	761 LBS.	1,100 LBS.
LENGTH (INCLUDES TAILWHEEL)	77"	86"	93"	112"	124"
WIDTH (OVERALL)	51"	64"	75"	75"	88"
CUTTING WIDTH	48"	60"	72"	72"	84"
CUTTING HEIGHT	1.5-9"	1.5-9"	1.5-9"	1.5-9"	3-11"
CUTTING CAPACITY	UP TO 1"	UP TO 1"	UP TO 1"	UP TO 1"	UP TO 1"
DECK HEIGHT	7.5"	7.5"	7.5"	7.5"	9.8"
DECK MATERIAL THICKNESS	12 GA.	12 GA.	12 GA.	11 GA. WITH 3/16" REINFORCED SIDES	10 GA.
HITCH	CAT 1	CAT 1	CAT 1	CLEVIS STYLE CAT 1	CLEVIS STYLE CAT 1 & 2
QUICK HITCH COMPATIBLE	YES	YES	YES	YES	YES
POWER TAKE-OFF SPEED	540	540	540	540	540
GEARBOX	45 HP CAST IRON HOUSING, PRECISION FORGED STEEL GEARS	45 HP CAST IRON HOUSING, PRECISION FORGED STEEL GEARS	45 HP CAST IRON HOUSING, PRECISION FORGED STEEL GEARS	65 HP HD CAST IRON HOUSING, PRECISION FORGED STEEL GEARS	65 HP HD CAST IRON HOUSING, PRECISION FORGED STEEL GEARS
GEARBOX LUBRICATION	EP 80-90W GEAR OIL	EP 80-90W GEAR OIL	EP 80-90W GEAR OIL	EP 80-90W GEAR OIL	EP 80-90W GEAR OIL
GEARBOX LUBRICATION CAPACITY	23 OZ.	23 OZ.	23 OZ.	23 OZ.	23 OZ.
STUMP JUMPER	1/8" THICK, ROUND 22.3" PAN-TYPE	1/8" THICK, ROUND 22.3" PAN-TYPE	1/8" THICK, ROUND 22.3" PAN-TYPE	HD 28.5" DIAMETER BLADE PAN	HD 32.5" DIAMETER BLADE PAN
BLADES	1/2" X 3" HEAT-TREATED FREE SWINGING W/ SUCTION LIFT	1/2" X 3" HEAT-TREATED FREE SWINGING W/ SUCTION LIFT	1/2" X 3" HEAT-TREATED FREE SWINGING W/ SUCTION LIFT	1/2" X 3" HEAT-TREATED FREE SWINGING W/ FULL LENGTH SUCTION LIFT	0.5" X 4" HEAT-TREATED FREE SWINGING W/FULL LENGTH SUCTION LIFT
BLADE TIP SPEED	9,982 FT./MIN.	12,478 FT./MIN.	14,974 FT./MIN.	14,955 FT./MIN.	14,380 FT./MIN.
DRIVELINE	ASAE CAT 4 SHEAR BOLT PROTECTION	ASAE CAT 4 SHEAR BOLT PROTECTION	ASAE CAT 4 SHEAR BOLT PROTECTION	HD SLIP CLUTCH PTO W/ ERGONOMIC QUICK COUPLER	HD SLIP CLUTCH PTO W/ ERGONOMIC QUICK COUPLER
DRIVELINE PROTECTION OPTIONS	SHEAR BOLT	SHEAR BOLT	SHEAR BOLT	SLIP CLUTCH	SLIP CLUTCH
TAILWHEEL	15" LAMINATED TIRE	15" LAMINATED TIRE	15" LAMINATED TIRE	15" LAMINATED TIRE	DUAL 15" LAMINATED TIRE
SAFETY GUARDS	OPTIONAL RUBBER FRONT/ METAL REAR	OPTIONAL RUBBER FRONT/ METAL REAR	OPTIONAL RUBBER FRONT/ METAL REAR	FRONT AND REAR CHAIN GUARDS (STANDARD)	FRONT AND REAR CHAIN GUARDS (STANDARD)
SHEAR BOLT	1/2" X 3-1/2" GRD 2 HEX BOLT	1/2" X 3-1/2" GRD 2 HEX BOLT	1/2" X 3-1/2" GRD 2 HEX BOLT	-	-