

# HP750

## POST DRIVER ATTACHMENT

The versatile HP750 is ideal for tackling large driven post projects. This easy-to-operate attachment generates its power from a nitrogen-charged power cell, delivering up to 900 blows per minute. It's designed to install all types of wood and steel posts providing maximum adaptability.



belltec.net

## MID-SIZE DRIVER. HEAVY-DUTY WORK ETHIC.



### ROBUST AND ADAPTABLE



The HP750 accommodates several styles of posts, including wood, and steel pipe. The robust frame is designed for the toughest ground conditions and the power cell can be mounted on a skid loader or excavator.

### HP750 FEATURES

- Powerful 750 ft-lb energy class Post Driver capable of up to 900 blow count/minute.
- Modular mounting plate allows the post driver to be mounted on Skid Steer Loaders and Compact Excavators.
- Efficiently designed energy pack reduces maintenance with few moving parts and only one lubrication point.
- Multi-purpose post pulling chain can also be used as a depth gauge and plumb bob.
- The integrated frame cavity allows the user to easily add weight to the frame, improving efficiency and reducing vibration.

### USER FRIENDLY DESIGN



The operator is in full control of the post during the installation. Vertical accuracy can be adjusted on the fly using the domed cup drive tool to ensure the post is straight, and the pulling chain serves as a depth gauge and plumb bob.

BELLTEC.NET | 800.242.9410



# BELLTEC™

## ONE ATTACHMENT, TWO MACHINES

The HP750 is designed to be adaptable. It installs various types of posts and can be used on two different prime movers. The robust steel frame and modular mounting plate make this attachment ideal for almost any post installation job, big or small.



Universally attaches to most skid loaders and excavators.

## HP750 PRODUCT SPECIFICATIONS

Prime Mover Weight Class	4 - 6 t
Min Hydraulic Pressure	2,000 PSI (138 Bar)
Max Hydraulic Pressure	3,000 PSI (207 Bar)
Required Hydraulic Flow	11-18 GPM (41-68 LPM)
Blow Count / Minute	500 - 900
Nitrogen Pressure	230 PSI (16 Bar)
Drive Tool Shank Diameter	2.7" (68.5mm)
Weight - Skid Loader Config	1,263 Lbs (573 Kg)
Weight - Excavator Config	800 Lbs (363 Kg)


## WARRANTY INFORMATION

One-year limited warranty on the HP750 attachment including tooling.

## EASY TO USE. EASY TO MAINTAIN



With 750 ft-lb of vibratory power, the HP750 is easy to operate in a variety of ground conditions, and with few moving parts, maintenance and downtime are minimal.

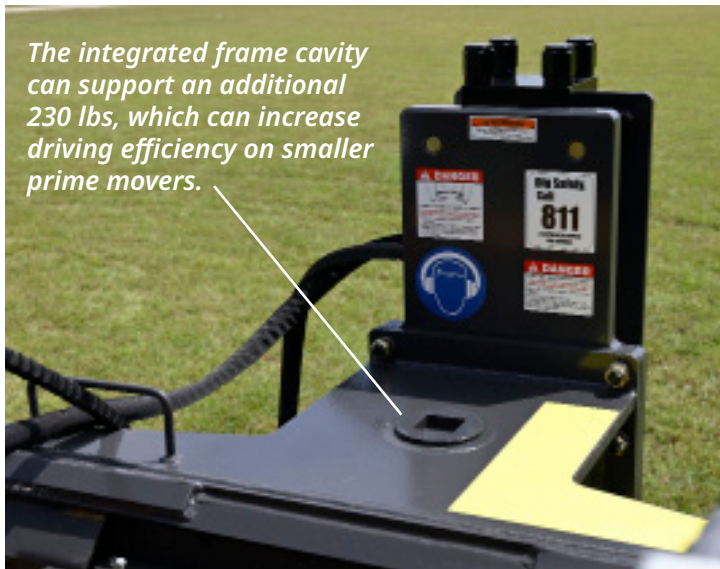

*The integrated frame cavity can support an additional 230 lbs, which can increase driving efficiency on smaller prime movers.*



### Toolbox Includes

- 1 Nitrogen Charging Kit
- 4 Combo Wrenches
- 1 Tool Pin Punch
- 1 Top-Bolt Hammer Wrench



Proudly located in Belton, Texas, Belltec Industries has been designing, patenting, and producing innovative construction attachments for the mobile construction and off-highway equipment industry for over thirty years. We pride ourselves on offering products and solutions that will exceed our customers' expectations. We do more than build groundbreaking products; we provide results that ensure our customers get the job done.

### BELLTEC INDUSTRIES

Belton, Texas, USA

800.242.9410 | [belltec.net](http://belltec.net) | [inquiry@belltec.net](mailto:inquiry@belltec.net)

© 2024 Belltec Industries, Inc. All Rights Reserved



# BELLTEC™