



Farm Equipment Ltd.



PRODUCT CATALOGUE



Square Bale Hugger

- Designed to handle wrapped square bales and also dry and round bales.
- Comes complete with two hydraulic cylinders.
- Mounts to the front end loader and is especially designed to gently handle wrapped square bales and also dry and round bales.



SPECIFICATIONS

MODEL:	DESCRIPTION:
SBH-S	Opens to 76" (193 cm) and is 28" (71 cm) when closed Hydraulic Cylinders: 2
SBH	Opens to 76" (193 cm) and is 28" (71 cm) when closed Hydraulic Cylinders: 2



Single Round Bale Grabber

- Specially designed arms grasp a 3' to 6' bale firmly without damaging the plastic wrapping.
- Designed to fit most standard front end loaders.
- Easily adaptable to your quick-tach brackets (plate).



SPECIFICATIONS

MODEL:	OPTIONS:
WBG	Bolt-on quick attach plates are available for all loader mounted equipment Weld-on Euro and skid steer style brackets are also available. Comes standard with 8" x 3.5" welded cylinder (1 3/4" rod.)

Double Round Bale Grabber



- Specially designed arms grasps two 3' to 6' bale firmly without damaging the plastic wrapping.
- Designed to fit most standard front end loaders.
- Easily adaptable to your quick-tach brackets (plate).

SPECIFICATIONS

MODEL:	OPTIONS:
WBG-2	Bolt-on quick attach plates are available for all loader mounted equipment Weld-on Euro and skid steer style brackets are also available. Comes standard with 8" x 3.5" welded cylinder (1 3/4" rod.)

Skidsteer Single Bale Spear

- Available with one 38" spear.
- Skid steer mounted bale spear with capacity up to 2,000 lbs.

SPECIFICATIONS

MODEL:	OPTIONS:
BSF-S	Single Spear. Skid steer mounted bale spear with capacity up to 2,000 lbs. Available with 38" spear.



Skidsteer Double & Triple Bale Spear

- Available with two 38" spears or three 32" or 38" spears.
- Skid steer mounted bale spear with capacity up to 2,000 lbs.

SPECIFICATIONS

MODEL:	OPTIONS:
BSF2-S	Double Spear. Skid steer mounted bale spear with capacity up to 2,000 lbs. Available in 32" or 38".
BSF3-S	Triple Spear. Skid steer mounted bale spear with capacity up to 2,000 lbs. Available in 32" or 38".



3-Point Hitch Double Bale Spear

- Standard with two anti-roll tines.
- Available in Category I and Category II.

SPECIFICATIONS

MODEL:	OPTIONS:
BST	Point bale spear. 3-Point hitch mounted bale spear with capacity up to 2,000 lbs. Available with single or double bale spear.





Front-Mounted Single Loader Bale Spear

- Available with one 38" spear.
- Designed to fit most front-end loaders or 3-Point hitch.
- Loader arm distance of 50" or less.



SPECIFICATIONS

MODEL:	OPTIONS:
BSF	Single Spear. Capacity up to 2,000 lbs. Available with Euro quick-attach system and other makes (upon request).

Front-Mounted Double Loader Bale Spear

- Available with two 38" spears.
- Designed to fit most front-end loaders.
- Loader arm distance of 50" or less.



SPECIFICATIONS

MODEL:	OPTIONS:
BSF2	Double Spear. Capacity up to 2,000 lbs. Available with Euro quick-attach system and other makes (upon request).

Front-Mounted Triple Loader Bale Spear

- Available with three 38" spears.
- Designed to fit most front-end loaders.
- Loader arm distance of 50" or less.



SPECIFICATIONS

MODEL:	OPTIONS:
BSF3	Double Spear. Capacity up to 2,000 lbs. Available with Euro quick-attach system and other makes (upon request).

Bucket-Mounted Single Bale Spear



- Easily and quickly attaches to your bucket with bolt or pin.
- Comes standard with two anti-roll tines.
- Equipped with double chains for better distribution of stress on your bucket

SPECIFICATIONS

MODEL:	OPTIONS:
BSB	Single spear. Chain mounted bucket spears are equipped with double chains for better distribution of stress on your bucket. Available with one 38" spear.

Bucket-Mounted Double Bale Spear



- Easily and quickly attaches to your bucket with bolt or pin.
- Comes standard with two anti-roll tines.
- Equipped with double chains for better distribution of stress on your bucket

SPECIFICATIONS

MODEL:	OPTIONS:
BSB2-38	Double spear. Chain mounted bucket spears are equipped with double chains for better distribution of stress on your bucket. Available with 38" spears.



Round Bale Spinner

- The most economical unit to move and feed round bales.
- Equipped with a hydraulic motor and cushion valve which allows you to precisely control the rotation speed and the rotating direction.
- The two European style spears assure easy penetration of the bale and provide excellent stability.



SPECIFICATIONS


MODEL:	OPTIONS:
RBS-S	Designed for all skid steer loaders and front end loaders with similar systems.

3-Point Hitch Bale Unroller

- Saves you time by allowing the quick unrolling of round bales.
- Will handle 4' width bales up to 6' in diameter and opens to 56" (142 cm) and is 36" (91 cm) when closed.

SPECIFICATIONS

MODEL:	OPTIONS:
BU	Opens to 56" (142 cm) and is 36" (91 cm) when closed

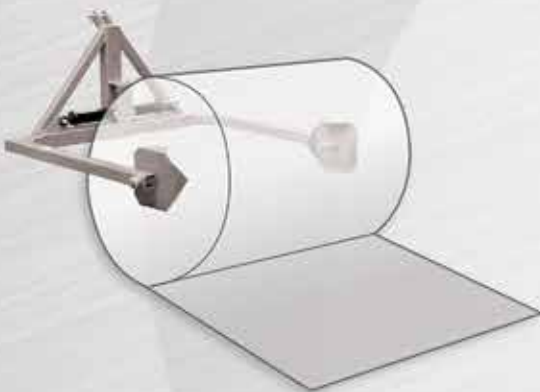



Rubber Scrapers

- Heavy duty rubber scraper for use on farmyard, roads, stables.
- Reconditioned rubber reinforced with steel-wire.
- Durable rubber available for feed alleys and damage delicate floors.
- Rubber is reversible.
- Oversized model to connect to reach loaders and shovels.
- Working width approximately 2650 mm
- Standard model can be used both on tractor three-point linkage (cat. II) and forklift.



ADJUSTABLE
END PLATES



HYDRAULIC
PIVOTING SCRAPER



STANDARD SCRAPER

SPECIFICATIONS

MODEL	DESCRIPTION	WORKING WIDTH	WEIGHT	HEIGHT PUSHING BLADE
MS275-S	Fixed model		145 kg	
MS275-SZ	Fixed model, galvanized		145 kg	
MS275-DV	Rotatable		235 kg	
MS275-DVH	Hydr. rotatable		260 kg	
MS210-H	Not rotatable	2,000 mm	135 kg	
MS210-HV	Mech. rotatable in 3 positions	2,000 mm	158 kg	
MS210-HVH	Hydr. rotatable	2,000 mm	193 kg	
MS275-H	Not rotatable	2,650 mm	150 kg	
MS275-UZ	Fixed model	2,650 mm	230 kg	
MS325-UZ	Fixed model	3,150 mm	265 kg	
MS275-UZH	Hydr. rotatable	2,650 mm	300 kg	
MS325-UZH	Hydr. rotatable	3,150 mm	335 kg	
SH200-V		2,000 mm	560 mm	170 kg
SH200-VH		2,000 mm	560 mm	180 kg



3-Point Hitch Forklift

- Equipped with folding tines and tow hitch allowing you to pull wagons etc. without removing the forklift.

SPECIFICATIONS

MODEL	NO. OF CHAINS	LIFTING HEIGHT	RETRACTED HEIGHT	LIFTING CAPACITY	CATEGORY
H150 / 1600	1	150 cm / 59 in.	165 cm / 65 in.	1,600 kg / 3,500 lbs.	1
H200 / 1600	1	200 cm / 78 in.	190 cm / 75 in.	1,600 kg / 3,500 lbs.	1
H240 / 1600	1	240 cm / 94 in.	210 cm / 83 in.	1,600 kg / 3,500 lbs.	1
H240 / 2000	2	240 cm / 94 in.	210 cm / 83 in.	2,000 kg / 4,400 lbs.	2
H280 / 1600	1	280 cm / 110 in.	230 cm / 91 in.	1,600 kg / 3,500 lbs.	1
H280 / 2000	2	280 cm / 110 in.	230 cm / 91 in.	2,000 kg / 4,400 lbs.	2



3-Point Hitch Stationary Pallet Fork





Fork Mounted Bulk Bucket



- Extremely robust bulk bucket for industrial applications.
- Double hinge device for a minimum of loss in dump height.
- All rotating points have bearings.
- Complete with hydraulic hoses and quick connectors.

SPECIFICATIONS

MODEL	WIDTH	DEPTH	HEIGHT	VOLUME	CENTRE OF GRAVITY	WEIGHT
HO-750	1,200 mm	1,400 mm	750 mm	750 L	800 mm	350 kg
HO-1000	1,600 mm	1,400 mm	750 mm	1,000 L	800 mm	385 kg
HO-1300	2,000 mm	1,400 mm	750 mm	1,300 L	800 mm	430 kg
HO-750F	1,200 mm	1,400 mm	750 mm	750 L	750 mm	370 kg
HO-1000F	1,600 mm	1,400 mm	750 mm	1,000 L	750 mm	410 kg
HO-1300F	2,000 mm	1,400 mm	750 mm	1,300 L	750 mm	455 kg
HO-200-I	2,000 mm	1,550 mm	900 mm	1,700 L	800 mm	760 kg
HO-225-I	2,250 mm	1,550 mm	900 mm	1,900 L	800 mm	790 kg
HO-250-I	2,500 mm	1,550 mm	900 mm	2,100 L	800 mm	820 kg
HO-150-IF	1,500 mm	1,200 mm	950 mm	1,000 L	720 mm	660 kg
HO-175-IF	1,750 mm	1,200 mm	950 mm	1,200 L	720 mm	700 kg
HO-200-IF	2,000 mm	1,200 mm	950 mm	1,400 L	720 mm	740 kg
HO-200-ZIF	2,000 mm	1,500 mm	1,100 mm	1,950 L	800 mm	920 kg
HO-225-ZIF	2,250 mm	1,500 mm	1,100 mm	2,200 L	800 mm	970 kg
HO-250-ZIF	2,500 mm	1,500 mm	1,100 mm	2,450 L	800 mm	1,020 kg
HO-275-ZIF	2,750 mm	1,500 mm	1,100 mm	2,700 L	800 mm	1,070 kg
HO-300-ZIF	3,000 mm	1,500 mm	1,100 mm	2,950 L	800 mm	1,120 kg

Forklift Box Rotator

- Rotator with a rotation angle of 180° (left rotation as standard).
- Extremely open construction for optimal visibility.
- High quality tipping shaft with sleeve bearing.
- Available with adaptor plates for front end loader and skidsteer.
- Fixed or folding side tine.
- Fixed or folding tine adjustable in width



SPECIFICATIONS

MODEL	MAX. LOAD	CARRIER HEIGHT	THICKNESS	CENTRE OF GRAVITY	HEIGHT SIDE TINE*	CARRIER WIDTH	WEIGHT
K53a-I Fixed	2,500 kg	Class II; 407 mm	160 mm	131 mm	360 mm	1,000 mm	235 kg
K53a-O (folding)	2,500 kg	Class II; 407 mm	160 mm	166 mm	660 mm	1,000 mm	265 kg
K53c-I (fixed)	3,500 kg	Class III; 508 mm	170 mm	132 mm	460 mm	1,200 mm	310 kg
K53c-O (folding)	3,500 kg	Class III; 508 mm	170 mm	146 mm	760 mm	1,200 mm	345 kg
K53a-Z	2,500 kg	Class II; 407 mm	160 mm	166 mm	660 mm	1,000 mm	280 kg
K53c-Z	3,500 kg	Class III; 508 mm	170 mm	146 mm	760 mm	1,200 mm	360 kg

*Calculated from the top of the fork to the bottom of the fork carrier



Skidsteer Box Rotator

- Rotator with a rotation angle of 180° (left rotation as standard).
- Extremely open construction for optimal visibility.
- High quality tipping shaft with sleeve bearing.
- Available with adaptor plates for front end loader and skidsteer.
- Fixed or folding side tine.
- Fixed or folding tine adjustable in width.



SPECIFICATIONS

MODEL	MAX. LOAD	CARRIER HEIGHT	THICKNESS	CENTRE OF GRAVITY	HEIGHT SIDE TINE*	CARRIER WIDTH	WEIGHT
K53a	Need specs from client						





Made in Canada

All Wifo Farm Equipment Products are manufactured in Canada. We use quality parts and manufacturing processes to make sure all our products are built to the highest standards.



Powder Coat finish

To ensure a high end finish that stands the test of time, we powder coat all our products. Powder coat finish helps prevent rusting and is much tougher than conventional paint.



Pick your colour

Pick the Wifo colour that will match your tractor or skidsteer. Ask your Wifo Farm Equipment Dealer about available colour options for your Wifo product.



Farm Equipment Ltd.

4181 Boomer Line RR #1
St. Clements, ON N0B 2M0
Toll Free: 1.800.390.4752
Fax: 1.519.699.5655

www.wifo.ca