



**CUMMINGS & BRICKER**

www.cummingsandbricker.com  
support@cummingsandbricker.com

Effective: 08/15/2025

F.O.B. C&B

**McHale** [Click here for ordering programs-Select Program #2 from Bookmarks](#)

## ROUND BALE EQUIPMENT

### **McHale** *The Professional Choice*

The McHale 991 Range sets the pace for efficient and effective round bale wrapping. Practical design, quality components and precision engineering make the 991 Range the first choice for contractors and farmers who want a high quality and consistent performance in all types of conditions and terrain. Look for the hydraulically operated cut and tie system, the efficient dispenser, which maximizes film usage and its patented ground supported damper system and you will see why the 991 Range is your perfect choice. Like all McHale wrappers, the high output 991 Range will give you a tightly wrapped bale that contains all the natural juices for increased nutritional value while improving environmental protection.



#### TRAILED MODELS

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
991BC	Bale Wrapper W/Load Arm & Sidetip - 4 Lever Cable Controls	4123	\$35,152.00
991BE	Bale Wrapper W/Load Arm & Sidetip - Electronic Controls	4123	\$41,772.00
991BER	Bale Wrapper Load Arm/Sidetip - Electronic Controls/Remote	4123	\$43,174.00
991HS	Bale Wrapper W/Load Arm & Sidetip - Electric Controls - Twin Plastic Pretensioners For High Speed Wrapping	4299	\$50,852.00
991HSR	Bale Wrapper W/Load Arm & Sidetip - Electronic Controls W/Remote, High Speed	4299	\$52,274.00
991TBER	Bale Wrapper No Load Arm - Electronic Controls W/Remote	2200	\$38,378.00
ORBITAL	Bale Wrapper W/Load Arm & Sidetip - Electronic Controls, High Speed Wrapping	4078	\$59,051.00

#### ROUND BALE WRAPPERS-3PT MODELS

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
991LBER	Bale Wrapper 3PH - Electronic Controls W/Remote	1764	\$34,549.00

*Wrappers ship fully assembled*

## ROUND & SQUARE WRAPPER OPTIONS AND ACCESSORIES

ITEMNUMBER	DESCRIPTION	PRICE
MCPPH	Power Pack 13HP Honda E/S Wrappers - Fits 991TBER/995TSR Models - Battery Included	\$6,305.00
RBW00003	5' Lift Arm & Bobbin Holders - For 991B/991BE Models - Does Not Fit 991HC	\$765.00

100-120 LEHIGH AVE.  
P.O. BOX 928  
BATAVIA, NY 14021  
PHONE: 800-252-1552 FAX: 888-852-7406

100 STOVER DRIVE  
CARLISLE, PA 17015  
PHONE: 800-222-8969  
FAX: 717-249-9384



**CUMMINGS & BRICKER**

www.cummingsandbricker.com  
support@cummingsandbricker.com

Effective: 08/15/2025

F.O.B. C&B



## ROUND & SQUARE WRAPPER OPTIONS AND ACCESSORIES

### 991 Trailed Bale Wrapper FEATURES



**BALE DAMPER SYSTEM** – The Patented Bale Damper system is probably one of the most important features. Only a McHale wrapper will give you a ground supported bale damper which will gently lower the bale to the ground and at the same time eliminate all stress to the chassis. When the rotating table stops and is raised to the tip position, the heavy duty bale damper raises to cradle the bale while a second arm is lowered automatically to the ground. The heaviest of bales can then be gently lowered eliminating damage.



**CUT & TIE SYSTEM** – The McHale hydraulically operated Cut and Tie System cuts and holds the film in position ready to wrap the next bale. This time saving device eliminates the need to manually reattach the film. Uniquely designed, this system works reliably and consistently in all weather conditions.

#### Standard Features on 991B

- 4 lever control
- 30" dispenser
- Ground support damper
- Wide low ground pressure tires
- Self-loading arm
- Counter balance weight
- Bale support bobbins
- Shear bolt protection
- Auto stop function (Rotation lever locks after 2 rotations and stops at the pre-set number of rotations.)
- Side tip damper
- Storage for 3 rolls of film



Programmable Bale Counter



4 lever cable controls from the tractor seat



Electric Controls on 991BE



Wide Tires



Shear bolt protection

### 991HC High Speed Bale Wrapper

**991HC** High Speed wrapper with dual dispensers, electric controls, film break sensors, self-loading arm and all the same features of the 991BE but with 50% more capacity.

The cab mounted control console is the operator's link to this high output machine. The operator is kept up to date on key machine operations through the graphic display. From the control console, the operator can select

- Auto bale load function
- Auto bale tip function
- Number of film layers to be applied to the bale
- Single roll wrapping mode



### Orbital High Speed Wrapper

**Orbital High Speed Wrapper** delivers consistent and even overlap to achieve high quality bale.

The Orbital harnesses the proven vertical wrapping ring technology used in the McHale Fusion to deliver a high output, low maintenance bale wrapper which is capable of keeping up with multiple balers.

- Full Automatic Operations
- Patented High Speed Bale Loading
- High Speed Vertical Wrapping Ring
- Wrap Bales from 43" to 57"
- Proven/Reliable Cut & Hold System
- Gentle Bale Tip after Wrapping
- Film Break Sensors
- Facility to Wrap with One Roll
- Clever Film Loading
- Expert Plus Control Box



100-120 LEHIGH AVE.  
P.O. BOX 928  
BATAVIA, NY 14021  
PHONE: 800-252-1552 FAX: 888-852-7406

100 STOVER DRIVE  
CARLISLE, PA 17015  
PHONE: 800-222-8969  
FAX: 717-249-9384



**CUMMINGS & BRICKER**

www.cummingsandbricker.com  
support@cummingsandbricker.com

Effective: 08/15/2025

F.O.B. C&B



## ROUND & SQUARE WRAPPER OPTIONS AND ACCESSORIES



### 991LBER Round Bale Wrapper 3-Pt Model

The 991LBER can be supplied with practical features including the hydraulic cut and tie system and the efficient 30" film dispenser unit which maximizes film usage, all which can be simply controlled with the touch of a button or a remote control.

#### Technical Data

3 Point Models [Round] 991LBER

Total Length	9'2"
Transport Width	5'5"
Height To Top of Rollers	2'9"
Total Height	6'4"
Min Oil Reg. GPM	5GPM @ 2200#
Max Bale Weight	2646 lbs.
Weight (unladen)	1764 lbs.
Working Speed Table (up to)	30 rotations/min
Electrical Requirements	12v/from battery (991LBER)
Film Holders	2
Dispenser – Aluminum 55%	30" (20" optional)
Protection Mechanism	Shear bolt/roll pin
Greasing Points	11

#### Equipment on Each Model

#### 991TBER

30/20	✓
2 Film Holders	✓
Bale Support Bobbins	✓
Quick Hitch System	✓
Cut & Tie	✓
Bale Wrap Monitor	✓
Full auto/remote and manual over-ride	✓
Trailed	✓



100-120 LEHIGH AVE.  
P.O. BOX 928  
BATAVIA, NY 14021  
PHONE: 800-252-1552 FAX: 888-852-7406

100 STOVER DRIVE  
CARLISLE, PA 17015  
PHONE: 800-222-8969  
FAX: 717-249-9384



**CUMMINGS & BRICKER**

www.cummingsandbricker.com  
support@cummingsandbricker.com

Effective: 08/15/2025

F.O.B. C&B



## SQUARE BALE EQUIPMENT

### BIG SQUARE BALE WRAPPERS

#### MODEL 998 - WRAPS UP TO 4W X 6L BALES

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
998HSR	Big Square Bale Wrapper-High Speed W/Remote, Up To 4' X 6' Bales	8680	\$129,032.00

#### 998HS High Speed Square Bale Wrapper

Common sense design, quality components and precision engineering make the 998 the trusted choice for contractors and farmers who demand high output and consistent performance in all conditions and terrain. Packed with features including conveyor loading and fast positioning of the bales into the wrapping position, hydraulically operated cut & tie system, auto bale leveling, and a two point linkage mounted, swivel headstock.

The in-cab control unit enables the operator to change bale sizes and select the desired number of film layers. When set, one touch of the auto start button operates the complete cycle from start to finish. The patented roller angle measuring device gives a consistent and even wrapping regardless of the bale size or shape, and also allows for extra care wrapping.

Standard with unloading conveyor and infrared remote control/receiver.

##### Technical Data

##### 998HS Trailed Model (square)

Transport Length	24'
Transport Width	9'7"
Transport Height	11'6"
Weight (unladen)	8,680 lbs
Wheel Dimensions	16.0/70-20 112ply
Attachment to Tractor	CAT II/III lower linkage SAE 6 spline PTO Shaft
PTO Speed	500-800 RPM
Hydraulic req:	
1 double acting spool valve	Hydraulic drawbar
1 single acting spool valve	Floating conveyor
Film Layers:	-2/ 2+2/2+2+2 (2 – 8 layers)
Operator selected	
Electrical Requirements	12 volt DC @ 5A
Drivers Control	Electronic Control Box
Bale Sizes	From 32" x 28" to 63" x 48" including double bales. Max Bale length 72"



100-120 LEHIGH AVE.  
P.O. BOX 928  
BATAVIA, NY 14021  
PHONE: 800-252-1552 FAX: 888-852-7406

100 STOVER DRIVE  
CARLISLE, PA 17015  
PHONE: 800-222-8969  
FAX: 717-249-9384



**CUMMINGS & BRICKER**

www.cummingsandbricker.com  
support@cummingsandbricker.com

Effective: 08/15/2025

F.O.B. C&B



## SQUARE BALE EQUIPMENT

### BIG SQUARE BALE WRAPPERS

#### TRAILED MODELS (NON-SELF LOADING)

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
995TSR	Trailed Big Square Bale And Round Bale Wrapper- Fully Automatic W/ Electronic Remote Control	2700	\$46,216.00

*Wrappers ship fully assembled*

#### 995 Trailed Big Square Bale & Round Bale Wrapper



**NOTE: Max square bale size: 36"x36"x72"**

The McHale 995 Trailed Single Dispenser Fully Automatic Remote Control Square bale wrapper range is the practical and versatile solution for wrapping large square bales. With the usual McHale common sense design, quality components and precision engineering the 995TSR square bale wrapper is the trusted choice for farmers who want high output and consistent performance for use in static locations.

On the 995 TSR square bale wrapper the rotating rollers ensure an even rotation of the bale and the efficient application of the film. Versatile too, with a simple adjustment the 995TSR square bale wrapper will equally and efficiently wrap large round bales. Like all McHale square bale wrappers, the high output 995 TSR square bale wrapper will give you a tightly wrapped bale that contains all the natural juices for increased nutritional value while improving environmental protection.

The 995TSR square bale wrapper gives an operator the flexibility of being able to mount a hydraulic power pack on the front of the machine for transportation and operation. The 995TSR also features a traileed drawbar and transportation wheels. The 995TSR square bale wrapper is an advanced square bale wrapper, which can be operated from the loading tractor by remote control, allowing for one man operation of the loading, wrapping and stacking functions.



100-120 LEHIGH AVE.  
P.O. BOX 928  
BATAVIA, NY 14021  
PHONE: 800-252-1552 FAX: 888-852-7406

100 STOVER DRIVE  
CARLISLE, PA 17015  
PHONE: 800-222-8969  
FAX: 717-249-9384



**CUMMINGS & BRICKER**

www.cummingsandbricker.com  
support@cummingsandbricker.com

Effective: 08/15/2025

F.O.B. C&B



## ROUND BALE EQUIPMENT

### ROUND BALE SPLITTER

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
994	Bale Splitter For up to 4' Diameter Bales - 3PH	607	\$4,610.00

### MOUNTING OPTIONS

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
BOKBO500MCHALE	Skid Steer Bolt On Kit	136	\$455.00
BOKAO600MCHALE	Euro / Global Q-Tach Bolt On Kit		\$455.00

### 994 Bale Splitter - Technical Data

Bale Splitter	994
Weight	607 lbs
Length	6'8"
Width	4'2"
Height - Open	7'3"
Height - Closed	3'3"
Lift Capacity	2425 lbs
Hydraulic Requirements	1 double acting service
Greasing points	3



MOUNTING – 3PT (Standard) or Loader (Mounting Brackets available through HLA)

### ROUND BALE HANDLER

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
691BH	Round Bale Handler - Rolls Remove To Reveal Spears (Loader Brackets priced separately)	352	\$3,384.00
R5EURO	Round Bale Handler - EURO/Global Mount / Includes Hose Kit & Pioneer Couplers	374	\$3,841.00
R5SSL	Round Bale Handler - Skid Steer Mount / Includes Hose Kit & Flat Face Couplers	374	\$3,841.00

### 691 Round Bale Handler

Heavy duty handler with rotating rollers and tine reinforcement. When the 691 round bale handler is transporting wrapped bales, two adjustable rollers powered by a double-acting hydraulic ram, close to cradle and carry the wrapped or unwrapped round bale securely and safely. The rotating rollers can be removed, transforming the 691 round bale handler into a spike type round bale handler capable of transporting two unwrapped bales of silage, hay, or straw at the one time.



### R5 Round Bale Handler

The McHale R5 round bale handler is ideal for collecting round bales, which have been tipped on their ends in the field. The McHale R5 Round Bale Handler can also be used to collect round bales, which have been left normally after a baler and rotate them through 90 degrees and stack them on their ends so that they hold their shape better.



100-120 LEHIGH AVE.  
P.O. BOX 928  
BATAVIA, NY 14021  
PHONE: 800-252-1552 FAX: 888-852-7406

100 STOVER DRIVE  
CARLISLE, PA 17015  
PHONE: 800-222-8969  
FAX: 717-249-9384



**CUMMINGS & BRICKER**

www.cummingsandbricker.com  
support@cummingsandbricker.com

Effective: 08/15/2025

F.O.B. C&B



## BALE PROCESSOR

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
C460S	Trailed Bale Processor - Capacity For Two 4' Round Bales, Swivel Chute, Electronic Controls, Square Bale Door	4900	\$55,780.00
C460R	Trailed Bale Processor - Capacity For Two 4' Round Bales, Swivel Chute, Electronic Controls, Round Bale Door	4900	\$54,503.00

### Bale Processors

McHale bale processors are available in 3 point hitch and trailed machine with the capacity to carry and process hay, straw, silage or haylage.

It's an ideal machine for farmers who wish use it for bedding stalls and feeding out bales.




C460 Processor - Trailed

	Bale Capacity	Minimum HP	No. of Conveyor Slats
C460	2 - 4' round bales	68	10



**Twin Speed Gearbox** controls the flywheel speed to distribute the material – 280 RPM and 540 RPM

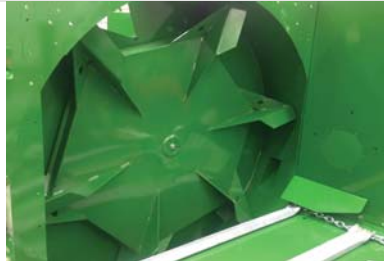

**Flywheel** is fitted with 6 blowing paddles and is positioned below the conveyor to ensure loose material is blown out



**Rotor with Hydraulic Activation** is equipped with 112 blades mounted on seven discs. The feed rotor is independent of the flywheel



**CUMMINGS & BRICKER**

www.cummingsandbricker.com  
support@cummingsandbricker.com

Effective: 08/15/2025

F.O.B. C&B



## BALER/WRAPPER COMBINATION MACHINE

McHale Fusion & balers are sold exclusively through dealers stocking those products. Call for availability to your dealership.

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
FUSION4PLUS	Baler/Wrapper Combo, Fixed Chamber 4x4, Plastic Binding, 1000 RPM	13000	\$205,530.00
FUSIONVARIOPUS	Baler/Wrapper Combo, Variable Chamber 4x5, Plastic Binding, 1000 RPM		\$231,883.00

### Fusion Variable Chamber Round Baler/Wrappers

Features	Fusion 4 Plus	Fusion Vario Plus
25 Knife Selectable Chopper	✓	✓
Drop Floor	✓	✓
Single Belt Bale Chamber	-	✓
18 Roller Bale Chamber	✓	-
83" Cam Pick Up Reel	✓	✓
Crop Roller	✓	✓
1000 RPM Gearbox	✓	✓
650/50 R22.5 Tires	✓	✓
Hydraulic Brakes	✓	✓
ISO-PLAY 12" Control Box	✓	✓
Pick-Up Position Sensor	✓	✓
In-Cab Density Control	✓	✓
Auto Greasing	✓	✓
Hydraulic Knife Reset	✓	✓
Moisture Sensor	✓	✓
Bale Weighing	✓	✓
High Speed Wrapping	✓	✓
70% Stretcher Gears	✓	✓
Sidetip End Ramp	✓	✓
NRF Loading Device	✓	-
Rear Work Lights	✓	✓
Plastic Bale Binding	✓	✓
Rear Panel Guards	✓	✓
Fully Automatic	✓	✓



Fusion 4 Plus



Fusion 4 Vario Plus

100-120 LEHIGH AVE.  
P.O. BOX 928  
BATAVIA, NY 14021  
PHONE: 800-252-1552 FAX: 888-852-7406

100 STOVER DRIVE  
CARLISLE, PA 17015  
PHONE: 800-222-8969  
FAX: 717-249-9384



**CUMMINGS & BRICKER**

www.cummingsandbricker.com  
support@cummingsandbricker.com

Effective: 08/15/2025

F.O.B. C&B



## V6740II VARIABLE CHAMBER BALERS

ITEMNUMBER	DESCRIPTION	PRICE
V6740MII	Variable Chamber Round Baler - 4x5' Bales, Non-Chopper, 3-Belt (Includes Monitor)	\$82,133.00

### V6740II Options

ITEMNUMBER	DESCRIPTION	PRICE
RBW00862A	Single Belt Option - Heavy Duty 3-Ply, For V6740MII	\$2,179.00
RBW00765A	1000 RPM Option - 21 Spline, For V6740MII	\$4,384.00

### V6740II Variable Chamber Round Baler

#### Features

- Non-Chopper
- Drop Floor
- 83" Cam Pick Up Reel
- Crop Roller
- 540 RPM Gearbox
- 500/50-17 Tires
- Electronic In-Cab Control Box
- Bale Kicker
- 3-Belt Chamber
- In-Cab Density Control



100-120 LEHIGH AVE.  
P.O. BOX 928  
BATAVIA, NY 14021  
PHONE: 800-252-1552 FAX: 888-852-7406

100 STOVER DRIVE  
CARLISLE, PA 17015  
PHONE: 800-222-8969  
FAX: 717-249-9384



**CUMMINGS & BRICKER**

www.cummingsandbricker.com  
support@cummingsandbricker.com

Effective: 08/15/2025

F.O.B. C&B



## V6750II & V6760II VARIABLE CHAMBER BALERS

ITEMNUMBER	DESCRIPTION	PRICE
V6750MII	Variable Chamber Round Baler - 4x5 Bales, 15-Knife Chopper, 3-Belt, ISOBUS (Does Not Include Monitor RBW01056)	\$89,904.00
V6760MII	Variable Chamber Round Baler - 4x5 Bales, 15 Knife Chopper, 3-Belt, ISOBUS, Automatic (Does Not Include Monitor RBW01056)	\$98,468.00

### V6750II & V6760II Options

ITEMNUMBER	DESCRIPTION	PRICE
RBW00765B	1000 RPM Option 21 Spline, For V6750MII & V6760MII	\$4,384.00
RBW00862B	Single Belt Option - Heavy Duty 3 Ply, For V6750MII & V6760MII	\$2,179.00
RBW00924B	Integrated Moisture Sensor - For V6750MII & V6760MII	\$1,365.00
RBW00941B	25 Knife Chopper Option - For V6750MII & V6760MII	\$3,995.00
RBW01056B	ISO-PLAY 6"ISOBUS Monitor Option - For V6750MII & V6760MII	\$1,603.00

### V6750II & V6760II Variable Chamber Round Baler

Features	V6750II	V6760II
15 Knife Chopper	✓	✓
Drop Floor	✓	✓
83" Cam Pick Up Reel	✓	✓
Crop Roller	✓	✓
540 RPM Gearbox	✓	✓
500/50-17 Tires	✓	✓
ISOBUS Tractor Cable	✓	✓
Bale Kicker	✓	✓
3-Belt Chamber	✓	✓
In-Cab Density Control	✓	✓
Pick-Up Position Sensor	✓	✓
Auto Greasing	✓	✓
Fully Automatic Intelligent Chamber Control	-	✓



100-120 LEHIGH AVE.  
P.O. BOX 928  
BATAVIA, NY 14021  
PHONE: 800-252-1552 FAX: 888-852-7406

100 STOVER DRIVE  
CARLISLE, PA 17015  
PHONE: 800-222-8969  
FAX: 717-249-9384



**CUMMINGS & BRICKER**

www.cummingsandbricker.com  
support@cummingsandbricker.com

Effective: 08/15/2025

F.O.B. C&B



## V8950II VARIABLE CHAMBER BALERS

ITEMNUMBER	DESCRIPTION	PRICE
V8950MII	Variable Chamber Round Baler - 4x6 Bales, 3-Belt, 15 Knife Chopper, ISOBUS, (Does Not Include Monitor RBW01056)	\$101,401.00

### V8950II Options

ITEMNUMBER	DESCRIPTION	PRICE
RBW00765C	1000 RPM Option - 21 Spline, For V8950MII	\$4,384.00
RBW00941C	25 Knife Chopper Option - For V8650MII	\$3,995.00
RBW01056C	ISO-Play 6" ISOBUS Monitor Option - For V8950MII	\$1,603.00

### V8950II Variable Chamber Round Baler

#### Features

- 15 Knife Chopper
- Drop Floor
- 83" Cam Pick Up Reel
- Crop Roller
- 540 RPM Gearbox
- 500/50-17 Tires
- ISOBUS Tractor Cable
- Bale Kicker
- 3-Belt Chamber
- In-Cab Density Control
- Pick-Up Position Sensor
- Auto Greasing



100-120 LEHIGH AVE.  
P.O. BOX 928  
BATAVIA, NY 14021  
PHONE: 800-252-1552 FAX: 888-852-7406

100 STOVER DRIVE  
CARLISLE, PA 17015  
PHONE: 800-222-8969  
FAX: 717-249-9384



**CUMMINGS & BRICKER**

www.cummingsandbricker.com  
support@cummingsandbricker.com

Effective: 08/15/2025

F.O.B. C&B



## FIXED CHAMBER ROUND BALERS

McHale Fusion & balers are sold exclusively through dealers stocking those products. Call for availability to your dealership.

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
F5540	4 x 4 Fixed Chamber Baler - No Chopper Unit	7100	\$71,513.00
F5550	4 x 4 Fixed Chamber Baler - 15-Knife Chopper	7200	\$79,603.00

### Fixed Chamber Baler Range

**F5-540** is a semi-automatic, non-chopper fixed chamber baler, equipped with a star shaped feed rotor to quickly and efficiently move crop from the pick-up into the bale chamber, maximizing baler throughput and performance. Central grease blocks are fitted on the machine for greasing, whilst oiling is controlled through the continuous oiling system.

**WIZARD CONTROL CONSOLE** allows for automatic or manual baling options, displays job and machine totals, contains a net feed and delay function and has a lube count alarm for oil and grease reminders.



**Features:**

- Profi-Flo Pick-Up
- Non-Chopper Twin Finger Rotor
- Drop Floor Unblocking System
- 18 Roller Bale Chamber
- 1'-1/4" Chain on the Bale Chamber
- Centralized Greasing Blocks (Manual Greasing)
- Dual Feed Net System
- Continuous Oiler System
- Wizard Control Console
- Bale Kicker



**F5-550** is a semi-automatic, 15 knife chopper fixed chamber baler, which comes fitted with automatic progressive greasing as standard. It is equipped with an i-Control 5 terminal, which allows the operator to control features such as drop floor and knife position. Bale density can now be adjusted on the terminal in the tractor cab.

**i-CONTROL 5 CONTROL CONSOLE** contains a large 5" graphic display which controls the drop floor and knife positions. 10 selectable customer profiles and bale counts for the day or life of the machine. The control also has a lube check alarm for operator to check grease & oil levels.



**Features:**

- Profi-Flo Pick-Up
- 15 Knife Chopper Rotor
- Drop Floor Unblocking System
- 18 Roller Bale Chamber
- 1'-1/4" Chain on the Bale Chamber
- Automatic Progressive Greasing System
- Dual Feed Net System
- Continuous Oiler System
- i-Control 5 Console
- Knife Pressure Display
- Knife Position Sensor
- Drop Floor Sensor
- Bale Kicker



**PROFI-FLO PICK-UP** increases crop intake through a tapered feed channel encourages the crop to flow from the pick-up and then move towards the rotor and into the bale chamber, maximizing throughput. The Profi-Flo pick-ups are fitted with a heavier driveline which reduces chain load and increases chain life.

**CONTINUOUS OILING SYSTEM** When the PTO is engaged, the continuous oiling system consistently lubricates the chains to ensure a long service life. The continuous oiling system on the machine is driven off the gearbox and delivers oil to chamber drive, rotor, pick-up drive chains, and pick-up cam track.



**CUMMINGS & BRICKER**

www.cummingsandbricker.com  
support@cummingsandbricker.com

Effective: 08/15/2025

F.O.B. C&B



## FIXED CHAMBER ROUND BALERS

	<b>F5 540</b>	<b>F5 550</b>
<b>DIMENSIONS &amp; WEIGHT</b>		
Length / Width / Height	13'3" / 8'4" / 8'*	13'3" / 8'4" / 8'*
Weight	7,187 lbs.	7,716 lbs.
<b>CHOPPER UNIT</b>		
Number of Knives	0	15
Theoretical Chop Length	-	2.5"
Knife Protection / Control	N/A	Hydraulic From Cab
<b>BALE CHAMBER</b>		
Diameter / Width	4'1" / 4'	4'1" / 4'
Bale Chamber Feed	Non-Chopper	15 Knife Chopper
Number of Rollers	18	18
Bearings	50mm **	50mm**
Greasing	Centralized Blocks Manual	Automatic Progressive
<b>BALE CHAMBER BINDING</b>		
Type	Net	Net
Control	Manual or Automatic	Manual or Automatic
Binding System	Dual Feed Netting System	Dual Feed Netting System
Binding roll Capacity	1 + 1 Storage	1 + 1 Storage
Net/Film Adjustment	Manual On Baler	Manual On Baler
<b>TRANSMISSION</b>		
Gearbox	Split Drive	Split Drive
Main Drive Protection	Cam Clutch	Cam Clutch
Pick-Up protection	Slip Clutch	Slip Clutch
Chain Lubrication	Continuous	Continuous
<b>TRACTOR</b>		
Minimum Hydraulic Flow		
Hydraulic System	2 Double Acting Spools	2 Double Acting Spools
Minimum PTO Requirements	80HP	90HP
<b>CONTROL</b>		
Control System	Wizard Control	i-Control 5 or ISOBUS / ISO-PLAY (Optional)
Density Adjustment	On Baler Valve	In-Cab

\*Width depends on tire selection

\*\*Bearings are 55mm double raced on the main load points



## PRO GLIDE MOWERS

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
F3100	F3100 Front Mower Conditioner - 9'10" Working Width	2756	\$44,759.00
F3500	F3500 Front Mower Conditioner - 11'6" Working Width		\$47,196.00
B9600	Butterfly - Rear Mower Conditioner, Add Front Mower For An Overall Width Of 31' 6"	7385	\$114,298.00
R310	R310 Rear Mower Non-Conditioner - 9'9" Working Width, 25 MM High Cut Skids		\$31,492.00

### Pro Glide Mower Range



- Cutting Width: 9' 10"
- Swath Width: 51" – 91"
- Cut Height: 1" – 3"
- 7 Cutting Discs
- 3200 RPM Cutting Disc Speed
- 14 Blades (2blades per disc)
- Quick Change Cutting Blade
- Steel Tine Conditioner
- Conditioner Speed: 1000 RPM
- 80 HP Required
- PTO Speed: 1000 RPM
- Minimum Pressure: 2320 PSI
- Minimum Hydraulic Flow Rate: 4.54 gal/min @ 2320 PSI
- Capacity: 8.5 acres per hour
- LED Lighting 12 V / 7-pin socket



**FRONT PRO GLIDE MOWERS** suspension allows the cutterbar to move independently of the tractor's front linkage. The Patented Spring Compensator ensures that cutter bar ground pressure is maintained over the 20" vertical travel range and the cutter bar angle automatically adjusts up & down to the changes in the ground conditions.



**REAR PRO GLIDE MOWERS** use ground adaption technology which delivers 3 dimensional ground contour tracking. This allows the mower an arc of movement from left to right and allows the mower to move forward and back to adjust to changes in ground conditions.

	F3100 FRONT MOWER	R3100 REAR MOWER
Transport Width	116"	87"
Transport Height	57"	153"
Transport Length	76"	87"
Weight	2756 lbs	3241 lbs
Linkage	A-Frame	CAT II or CAT III, 3-Point Linkage



#### Steel Tine Conditioner

The Pro Glide prepares a uniform swath by conditioning across the working width of the mower. Conditioner speeds can be adjusted between 700 and 1000 rpm. Select from six adjustments for conditioning intensity. Deflection plates are adjustable to change the width of the swath.

### B9600 Pro Glide Butterfly Mower

The B9600 gives you both a right and left hand rear mower. Used along with the F3100 front mower, this butterfly mower gives you a maximum cutting width of 31' 6" (must add front mower and a mowing capacity of up to 25 acres per hour.

B9600 BUTTERFLY MOWER	
Cut Width	31' 6" (includes the addition of a front mower)
Transport Width	117"
Capacity	26 acres/hour
Minimum HP	250 HP (including front mower)
Cutting Blades	32 (2 Quick Change Blades Per Disc)





**CUMMINGS & BRICKER**

www.cummingsandbricker.com  
support@cummingsandbricker.com

Effective: 08/15/2025

F.O.B. C&B



## CENTER DELIVERY RAKE

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
R6878	Rotary Rake - 2 Rotor, Center Delivery, 22'4" To 25'7" Raking Width	4630	\$54,037.00

### Center Delivery Rakes

McHale center delivery rakes are powerful but gentle on the crop, delivering the perfect swath preparation. The rotors on the McHale center delivery rakes are suspended centrally and both rotors operate at equal ground pressure across the adjustable working width to deliver the perfect swath.

- Pivoting headstock
- Heavy duty wide angle driveline
- Incab width adjustment
- Rotor height adjustment indicators
- Tine arm cam adjustment
- Steering axle
- High speed running gear



Tine arm cam adjustment, allows operator to adjust when the tines release the crop



Rotors fold and move into a locking position w/ a transport height of 13'.



Incab width adjustment

SPECIFICATIONS	R 62-72	R 68-78
4 Foot Swath Gathering	2 Swaths	3 Swaths
Mount	2 Point Linkage	2 Point Linkage/CAT II
Incab Adjustable Working Width	20' 4" – 23' 7"	22' 4" – 25' 7"
Number of Rotors & Rotor Wheels	2 rotors/4 wheels per rotor	2 rotors/6 wheels per rotor
Rotor Diameter	9' 2"	10' 6"
Number of Arms/Tines Per Arm	11 / 4	13 / 4
Tine Diameter	3 Coil	3 Coil
PTO Shaft Speed/Driveline	540 RPM / Y Gearbox	540 RPM / Y Gearbox
Hydraulic Requirements	1 x Single Acting & 1 x Double Acting	1 x Single Acting & 1 x Double Acting
Main Greasing	Grease Nipples	Centralized Greasing Block
Axle & Wheels	6 Stud – 380/55/17	6 Stud – 380/55/17
Transport Width	9' 4"	9' 4"
Transport Height	12' 4"	13' 1"
Length	19' 8"	19' 8"

100-120 LEHIGH AVE.  
P.O. BOX 928  
BATAVIA, NY 14021  
PHONE: 800-252-1552 FAX: 888-852-7406

100 STOVER DRIVE  
CARLISLE, PA 17015  
PHONE: 800-222-8969  
FAX: 717-249-9384



**CUMMINGS & BRICKER**

www.cummingsandbricker.com  
support@cummingsandbricker.com

Effective: 08/15/2025

F.O.B. C&B



## TEDDERS

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
M6770	25'3" 3PH 6 Rotor Tedder - Hydraulic Headland Curtain	2800	\$31,694.00
T101260	41'4" 10 Rotor Tedder - Trolley		\$76,873.00

### ProPel Tedder

The ProPel tedders are the ideal machines to lift and aerate even the heaviest crops. This results in the best quality fodder in the shortest time. The tedders have proven to be strong, robust machines which are highly efficient and reliable in all terrains.

- Rotor Angle & Height Adjustment
- Crop Deflection Plate
- Pivoting Headstock
- Heavy-duty Driveline
- Oscillating Dampers (mounted model)
- Trailed Cat II Lower Linkage (trailed models)
- Headland Management System (optional)



	M6-770	T10-1260
Working Width	25'3"	41'4"
Transport Width	9'6"	9'10"
Transport Length	8'4"	19'
Transport Height	12'2"	8'6"
Recommended PTO Speed	480 RPM (SAE 6 spline PTO shaft)	580 RPM (SAE 6 spline PTO shaft)
Hydraulic Systems	2x DA hydraulic supply	1x SA, 2x DA hydraulic supply (1 with float)
Minimum Flow Rate	4.54 gal/min @ 2,610 psi	4.54 gal/min @ 2,610 psi
Rotors	6 Rotors with a 62" diameter	10 Rotors with a 5'2" diameter
Tines	7 double hooked tine arms per rotor	7 double hooked tine arms per rotor
Minimum Tractor Capacity	60HP	67HP
Chassis Tires	-	2 - 380/55-17
Rotor Tires	6 (one per rotor)	10 - 170/60-8

100-120 LEHIGH AVE.  
P.O. BOX 928  
BATAVIA, NY 14021  
PHONE: 800-252-1552 FAX: 888-852-7406

100 STOVER DRIVE  
CARLISLE, PA 17015  
PHONE: 800-222-8969  
FAX: 717-249-9384



**CUMMINGS & BRICKER**

www.cummingsandbricker.com  
support@cummingsandbricker.com

Effective: 08/15/2025

F.O.B. C&B



## MAINTENANCE PARTS KITS

ITEMNUMBER	DESCRIPTION	WEIGHT	PRICE
CBR00081KIT	Cam Bearing Kit - For V6/F5/Fusion Complete Pick Up		\$360.80
ALA00177KIT	Pick Up Bushing Kit - V6/F5/Fusion Complete Pick Up		\$414.70
CTP00048KIT	Pick Up Reel Band Kit - V6/F5/Fusion Complete Pick Up		\$1,856.80
CTN00008KIT	Pick Up Tine Kit (75) V6/F5/Fusion		\$575.30
CKN00014KIT	15 Knife Kit - V6/F5/Fusion		\$834.90
CKN00014KIT25	25 Knife Kit - V6/F5/Fusion		\$1,386.00
V6CHAINKIT	Chain Kit - V6 Complete Baler		\$1,504.80
F5CHAINKIT	Chain Kit - F5 Complete Baler	148	\$1,859.00

## Parts Kits Breakdown

KIT ITEM NUMBER	INCLUDED IN KIT
CBR00081KIT	5- CBR00081, 5- CFA00446, 5-CMH00672
ALA00177KIT	12- ALA00177
CTP00048KIT	29- CTP00048
CKN00014KIT	15- CKN00014
CKN00014KIT25	25- CKN00014
CTN00008KIT	75-CTN00008
V6CHAINKIT	1- CCH00051, 1- CCH02025, 2- CCH02026, 1- CCH02048, 1CCH02050, 1- CCH02057
F5CHAINKIT	1- CCH00049, 1- CCH00051, 1-CCH00052, 1- CCH02025, 2- CCH02026, 1 – CCH02037

## PROMOTIONAL MERCHANDISE

ITEMNUMBER	DESCRIPTION	PRICE
CWW00123	Beanie Hat	\$16.48
CWW00031	Softshell Jacket - XL	\$134.53
CWW00032	Softshell Jacket XXL	\$134.53
CWW00056	Softshell Jacket XXXL	\$134.53
CWW00152	1/32 Scale Model Of V6 Baler	\$113.94
CWW00114	Backpack	\$76.88



Softshell Jacket



Beanie Hat



Backpack



V6 Baler Model

100-120 LEHIGH AVE.  
P.O. BOX 928  
BATAVIA, NY 14021  
PHONE: 800-252-1552 FAX: 888-852-7406

100 STOVER DRIVE  
CARLISLE, PA 17015  
PHONE: 800-222-8969  
FAX: 717-249-9384